

INTERNATIONAL
STANDARD

ISO
19111

Third edition
2019-01

AMENDMENT 2
2023-08

**Geographic information —
Referencing by coordinates**

AMENDMENT 2

Information géographique — Système de références par coordonnées
AMENDEMENT 2

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 19111:2019/Amd 2:2023](https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023>



Reference number
ISO 19111:2019/Amd.2:2023(E)

© ISO 2023

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 19111:2019/Amd 2:2023

<https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 211, *Geographic information/Geomatics*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 287, *Geographic Information*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement), and in collaboration with the Open Geospatial Consortium (OGC).

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Geographic information — Referencing by coordinates

AMENDMENT 2

3.1.16

Move the EXAMPLE to be before Note 1 to entry. At the end of the EXAMPLE, remove right parenthesis after "...and G1762." The complete revised definition becomes:

3.1.16

datum ensemble

group of multiple realizations of the same terrestrial or vertical reference system that, for approximate spatial referencing purposes, are not significantly different

EXAMPLE "WGS 84" as an undifferentiated group of realizations including WGS 84 (TRANSIT), WGS 84 (G730), WGS 84 (G873), WGS 84 (G1150), WGS 84 (G1674) and WGS 84 (G1762). At the surface of the Earth these have changed on average by 0.7 m between the TRANSIT and G730 realizations, a further 0.2 m between G730 and G873, 0.06 m between G873 and G1150, 0.2 m between G1150 and G1674 and 0.02 m between G1674 and G1762.

Note 1 to entry: Datasets referenced to the different realizations within a datum ensemble may be merged without coordinate transformation.

Note 2 to entry: 'Approximate' is for users to define but typically is in the order of under 1 decimetre but may be up to 2 metres.

ISO 19111:2019/Amd 2:2023

<https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023>

3.1.31

Replace definition with:

3.1.31

geodetic coordinate reference system

two- or three-dimensional coordinate reference system based on a geodetic reference frame and having either a three-dimensional Cartesian or an ellipsoidal or a spherical coordinate system

Note 1 to entry: In this document a coordinate reference system based on a geodetic reference frame and having an ellipsoidal coordinate system is geographic.

3.1.60

Replace definition with:

3.1.60

spherical coordinate system

two- or three-dimensional coordinate system in Euclidean space in which position is specified by two angular coordinates and (in the three-dimensional case) one distance coordinate

Note 1 to entry: Not to be confused with an ellipsoidal coordinate system based on an ellipsoid 'degenerated' into a sphere.

9.3.2

After 9.3.2 list item f), add:

- g) Derived projected 2D + Vertical CRS.
- h) Derived projected 2D + Engineering 1D (near vertical).

9.3.4

Replace whole subclause with the following:

A spatio-parametric coordinate reference system is a compound CRS in which one component is a geographic 2D, projected 2D, engineering 2D CRS or derived projected 2D CRS, supplemented by a parametric CRS to create a three-dimensional CRS: an example is included in E.3.3. More than one parametric coordinate reference system may be included if these represent independent parametric quantities.

9.4, *fourth paragraph*

Insert an additional new last sentence as follows:

Associations between coordinate reference systems and coordinate operations are summarized in the UML class diagram in Clause 12, Figure 17.

[ISO 19111:2019/Amd 2:2023](https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023>

Figure 9

Replace Figure 9 with the following:

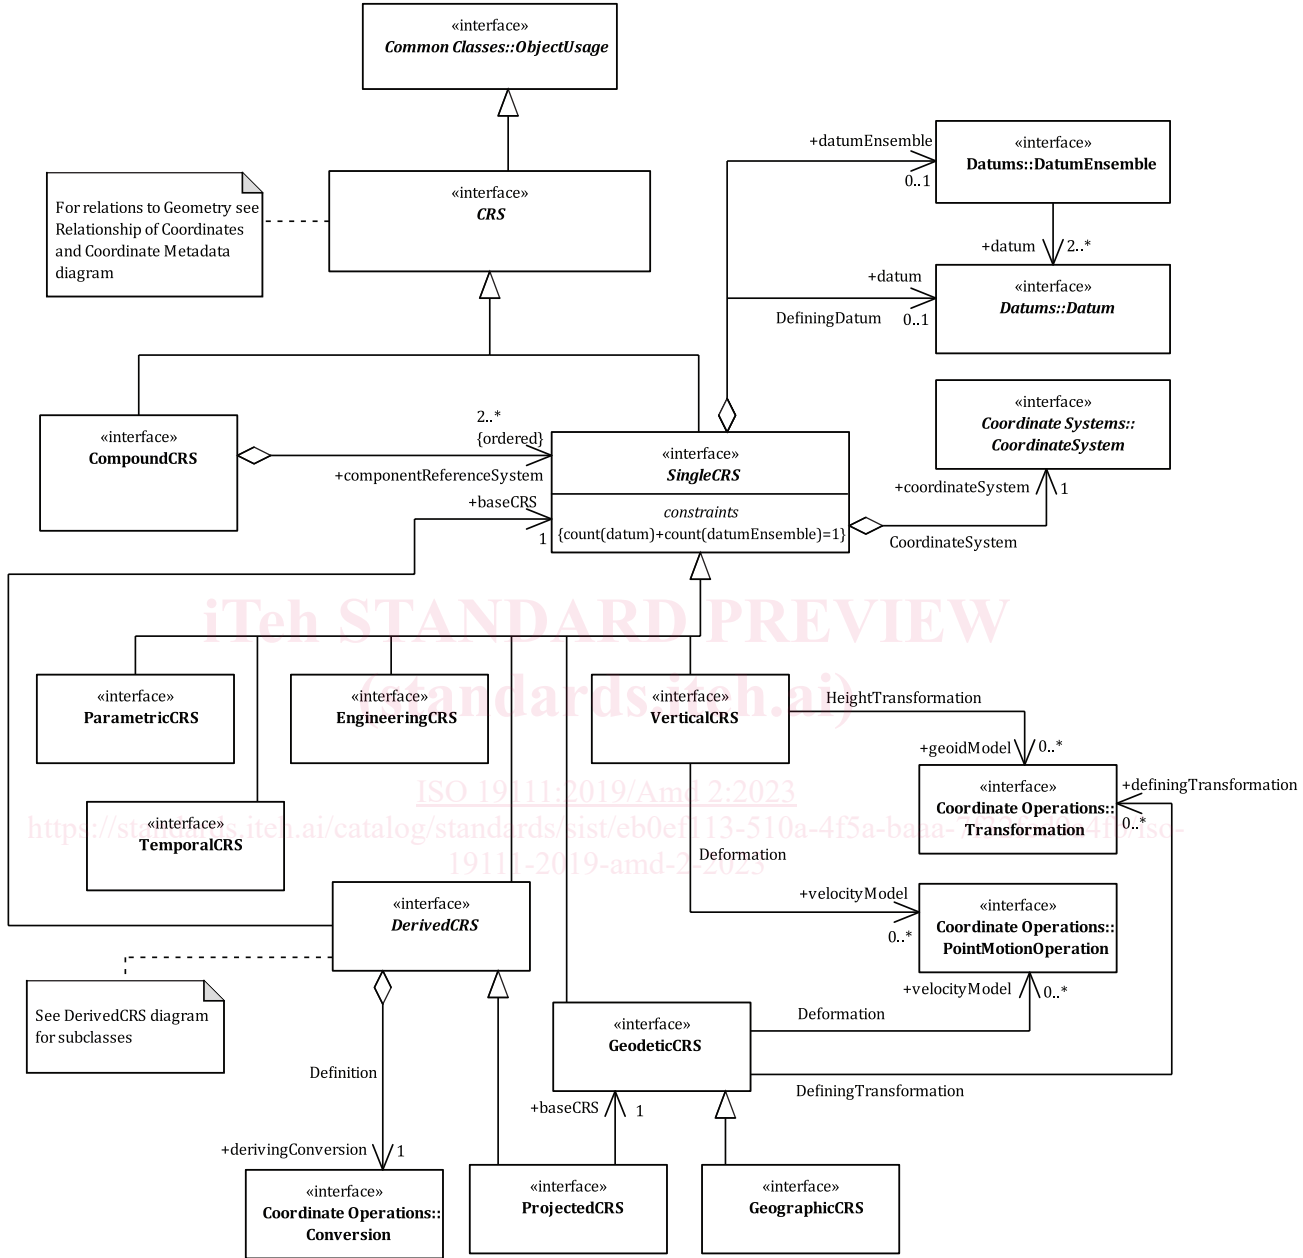


Figure 9 — UML diagram — Coordinate Reference Systems package

9.4, Table 10

Replace Table 10 with the following:

Table 10 — Defining elements of Coordinate Reference Systems::GeodeticCRS class

Definition:	coordinate reference system associated with a geodetic reference frame and a three-dimensional Cartesian or spherical coordinate system NOTE If the geodetic reference frame is dynamic then the geodetic CRS is dynamic, else it is static.				
Stereotype:	Interface				
Class attribute:	Concrete				
Inheritance from:	SingleCRS				
Generalization of:	GeographicCRS, DerivedGeodeticCRS				
Association roles:	associations inherited from SingleCRS, plus:				
Association name	UML identifier	Association with	Obligation	Maximum Occurrence	Association definition
Coordinate System	(aggregation) coordinateSystem	CoordinateSystems:: GeodeticCS	M	1	coordinate system that is a component of this geodetic coordinate reference system
Defining Datum	(aggregation) datum	Datums:: Geodetic ReferenceFrame	0	1	geodetic reference frame that is a component of this geodetic coordinate reference system
Defining Transformation	definingTransformation	CoordinateOperations:: Transformation	0	N	transformation that defines this geodetic coordinate reference system
Deformation	velocityModel	CoordinateOperations:: PointMotionOperation	0	N	velocity model(s) or deformation grid(s) that may be applied to this geodetic coordinate reference system
Constraints:	constraints inherited from SingleCRS, plus: {coordinateSystem.ocl As Type(EllipsoidalCS) implies count(datum.ellipsoid)=1}				
Remarks:	https://standards.iteh.ai The constraint enforces the requirement on geographicCRS to be associated with an ellipsoid. It is made through the GeodeticCRS class because GeographicCRS is related to Datum and hence Ellipsoid only through its subtyping from the GeodeticCRS class. GeodeticCRSs should be associated with a Cartesian coordinate system or with a spherical coordinate system.				
Public attributes:	6 attributes (CRS name, CRS alias, CRS identifier, CRS scope, CRS validity and CRS remarks) inherited from Common Classes::IdentifiedObject and Common Classes::ObjectUsage.				

9.4, Table 12

Replace Table 12 with the following:

Table 12 — Defining elements of Coordinate Reference Systems::VerticalCRS class

Definition:	coordinate reference system having a vertical reference frame and a one-dimensional vertical coordinate system used for recording gravity-related heights or depths; vertical CRSs make use of the direction of gravity to define the concept of height or depth, but the relationship with gravity may not be straightforward. NOTE 1 If the vertical reference frame is dynamic then the vertical CRS is dynamic, else it is static. NOTE 2 Ellipsoidal heights cannot be captured in a vertical coordinate reference system. They exist only as an inseparable part of a 3D coordinate tuple defined in a geographic 3D coordinate reference system.				
Stereotype:	Interface				
Class attribute:	Concrete				
Inheritance from:	SingleCRS				
Generalization of:	DerivedVerticalCRS				
Association roles:	associations inherited from SingleCRS, plus:				
<u>Association name</u>	<u>UML identifier</u>	<u>Association with</u>	<u>Obligation</u>	<u>Maximum Occurrence</u>	<u>Association definition</u>
Coordinate System	(aggregation) coordinateSystem	CoordinateSystems:: VerticalCRS	M	1	vertical coordinate system that is a component of this vertical coordinate reference system
Defining Datum	(aggregation) datum	Datums:: VerticalReferenceFrame	0	1	vertical reference frame that is a component of this vertical coordinate reference system
Height Transformation	geoidModel	CoordinateOperations:: Transformation	0	N	geoid model or height correction model that is associated with this vertical coordinate reference system
Deformation	velocityModel	CoordinateOperations:: PointMotionOperation	0	N	velocity model or deformation grid that is applied to this vertical coordinate reference system
Public attributes:	6 attributes (CRS name, CRS alias, CRS identifier, CRS scope, CRS validity and CRS remarks) inherited from Common Classes::IdentifiedObject and Common Classes::ObjectUsage..				

10.3, Table 26

In Table 26, replace the description of spherical CS with the following:

two- or three-dimensional coordinate system in Euclidean space with two angular coordinates and, in the three-dimensional case, one distance, measured from the origin.

NOTE Not to be confused with an ellipsoidal coordinate system based on an ellipsoid ‘degenerated’ into a sphere.

10.4, Table 27

Replace Table 27 with the following:

Table 27 — Naming constraints for coordinate system axis

CS type	When used in CRS type	Permitted coordinate system axis names
Cartesian	geodetic	geocentric X, geocentric Y, geocentric Z
Cartesian	projected	northing or southing, easting or westing, [ellipsoidal height (if 3D)]
ellipsoidal	geographic	geodetic latitude, geodetic longitude, [ellipsoidal height (if 3D)]
spherical	geodetic	spherical latitude, spherical longitude, [geocentric radius (if 3D)] or geocentric latitude, geodetic longitude, [geocentric radius (if 3D)] or geocentric co-latitude, geodetic longitude, [geocentric radius (if 3D)]
vertical	vertical	depth or gravity-related height

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 19111:2019/Amd 2:2023

<https://standards.iteh.ai/catalog/standards/sist/eb0ef113-510a-4f5a-baaa-7f32fed9a4fb/iso-19111-2019-amd-2-2023>