
Synchronous belts — Calculation of power rating and drive centre distance

*Courroies synchrones — Calcul de la puissance transmissible et de
l'entraxe*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5295:2023

<https://standards.iteh.ai/catalog/standards/sist/a9f64c35-5472-4dd6-852b-4f6826f5074e/iso-5295-2023>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5295:2023

<https://standards.iteh.ai/catalog/standards/sist/a9f64c35-5472-4dd6-852b-4f6826f5074e/iso-5295-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	2
5 Basic power rating	2
6 Power rating	2
6.1 Exact formula.....	2
6.2 Approximate formula.....	3
7 Centre distance	3
7.1 Exact formula.....	3
7.2 Approximate formula.....	4
8 Number of teeth in mesh	4
9 Factor k_z	4
10 Factor k_w	4

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5295:2023

<https://standards.iteh.ai/catalog/standards/sist/a9f64c35-5472-4dd6-852b-4f6826f5074e/iso-5295-2023>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 41, *Pulleys and belts (including veebelts)*, Subcommittee SC 4, *Synchronous belt drives*.

This fourth edition cancels and replaces the third edition (ISO 5295:2017), of which it constitutes a minor revision.

The changes are as follows:

- the scope been revised to clarify the applicability of the document.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Synchronous belts — Calculation of power rating and drive centre distance

1 Scope

This document establishes formulae for the calculation of power rating and centre distance of standard synchronous belts on two pulley drives.

It is applicable to trapezoidal belts only. It does not apply to curvilinear synchronous belts.

The numerical values of certain parameters used in the calculations depend upon the pitch and the construction of the belt and are specified by the belt manufacturer.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1

power rating

power that a specified synchronous belt can transmit under specified geometrical and ambient conditions for a satisfactory period of time, provided that the drive has been installed and is maintained in a proper manner

Note 1 to entry: The power rating depends on the following:

- the pitch of the belt and pulley teeth;
- the belt width;
- the mass of a linear metre of belt;
- the allowable working tension in the belt;
- the angular velocity of the smaller pulley;
- the number of teeth of the smaller pulley;
- the number of teeth in mesh on the smaller pulley.

4 Symbols

Symbol	Description	Units
b_s	Width of the belt to be rated	mm
b_{so}	Base width of the widest standard belt of pitch P_b (see Table 1)	mm
C	Centre distance of the pulleys	mm
k_w	Width factor	
k_z	Teeth in mesh factor	
m	Linear mass of a belt having a width b_{so}	kg/m
P	Power rating of a belt of base width b_s	kW
P_b	Pitch of the teeth of the belt and pulleys	mm
P_o	Power rating of a belt of base width b_{so}	kW
T_a	Allowable working tension of a belt having a width b_{so}	N
ω	Angular velocity of the smaller pulley	rad/s
v	Belt velocity	m/s
z_1	Number of teeth of the smaller pulley	
z_2	Number of teeth of the larger pulley	
z_b	Number of teeth of the belt	
z_m	Number of teeth in mesh on the smaller pulley	
int []	Integer part only of the expression following	

5 Basic power rating

The basic power rating of a belt of base width, b_{so} , is given by the [Formula \(1\)](#):

$$P_o = \frac{(T_a - mv^2)v}{1000} \quad (1)$$

where the belt velocity, v , has the value given by [Formula \(2\)](#):

$$v = \frac{\omega P_b z_1 \times 10^{-3}}{2\pi} \quad (2)$$

[Formula \(1\)](#) is valid only if the number of teeth in mesh $z_m \geq 6$ (see [Clause 6](#) for $z_m < 6$).

The values of T_a and m depend upon the construction and the type of belt; these shall be supplied by the belt manufacturer.

6 Power rating

6.1 Exact formula

The power rating of a belt of width, b_s , having z_m teeth in mesh on the smaller pulley, is given by [Formula \(3\)](#):

$$P = \left(k_z k_w T_a - \frac{b_s m v^2}{b_{so}} \right) v \times 10^{-3} \quad (3)$$

See [Clauses 9](#) and [10](#) for k_z and k_w , respectively.

6.2 Approximate formula

The power rating may be calculated approximately by simplification of [Formula \(3\)](#) as given by [Formula \(4\)](#):

$$P \approx k_z k_w P_o \quad (4)$$

7 Centre distance

7.1 Exact formula

First, calculate the auxiliary angle, θ , using [Formula \(5\)](#):

$$\operatorname{inv} \theta = \pi \frac{z_b - z_2}{z_2 - z_1} \quad (5)$$

where $\operatorname{inv} \theta = \tan \theta - \theta$; the value of θ (see [Figure 1](#)) can be determined by iteration or from involute tables.

The centre distance, C , is then given by [Formula \(6\)](#):

$$C = \frac{P_b (z_2 - z_1)}{2\pi \cos \theta} \quad (6)$$

The method according to [Formulae \(5\)](#) and [\(6\)](#) is valid in any case. However, it should not be used if the ratio z_2/z_1 is close to unity, because the expression for C becomes the ratio of two small quantities. In this case, the method according to [7.2](#) is recommended.

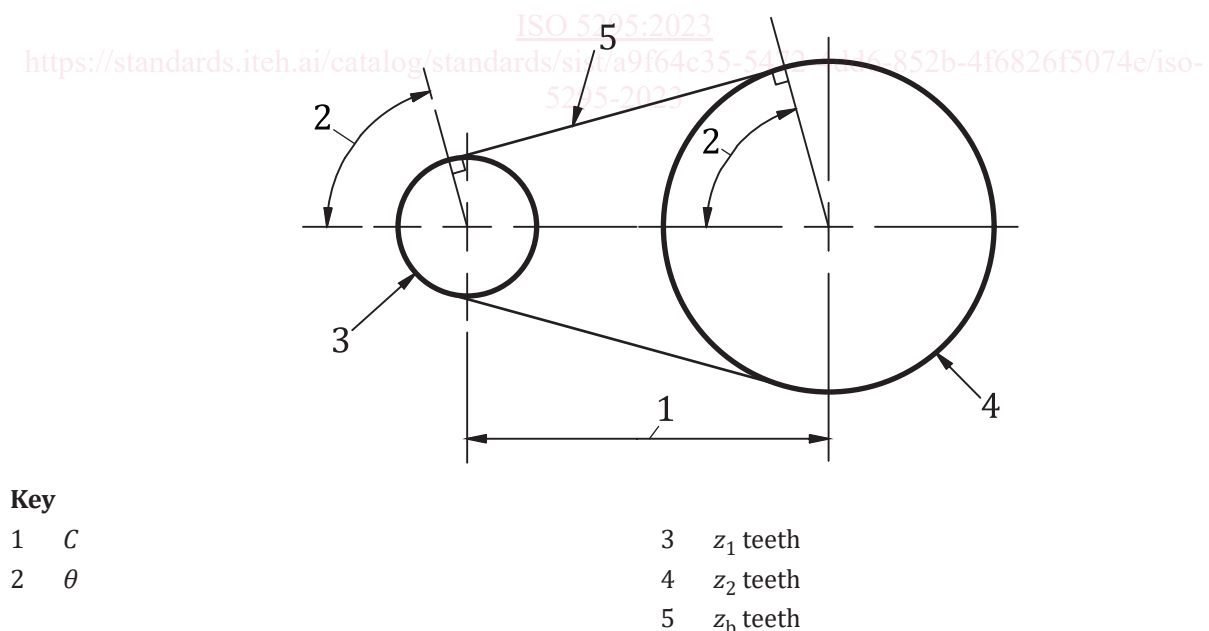


Figure 1 — Centre distance

7.2 Approximate formula

Firstly, calculate M by using [Formula \(7\)](#):

$$M = \frac{P_b}{8} (2z_b - z_1 - z_2) \tag{7}$$

then the centre distance, C , by using [Formula \(8\)](#):

$$C = M + \sqrt{M^2 - \frac{1}{8} \left[\frac{P_b (z_2 - z_1)}{\pi} \right]^2} \tag{8}$$

This method is to be avoided when the ratio z_2/z_1 is large. In this case, the method according to [7.1](#) shall be used.

8 Number of teeth in mesh

This number is given by [Formula \(9\)](#):

$$z_m = \text{int} \left[\frac{z_1}{2} - \frac{P_b z_1}{2\pi^2 C} (z_2 - z_1) \right] \tag{9}$$

in which $\frac{1}{2\pi^2}$ may be replaced by $\frac{1}{20}$ for ease of calculation.

9 Factor k_z

The factor k_z is given by [Formulae \(10\)](#) and [\(11\)](#):

$$\text{If } z_m \geq 6, k_z = 1 \tag{10}$$

$$\text{If } z_m < 6, k_z = 1 - 0,2(6 - z_m) \tag{11}$$

10 Factor k_w

The factor k_w is given by [Formula \(12\)](#):

$$k_w = \left(\frac{b_s}{b_{so}} \right)^{1,14} \tag{12}$$

where b_{so} depends upon the pitch code as given in [Table 1](#).

The resulting calculation of k_w is rounded off to two decimal places according to the usual convention.

Table 1 — Base widths of trapezoidal synchronous belts

Dimensions in millimetres

Pitch code	b_{so}
MXL	6,4
XXL	
XL	9,5
L	25,4
H	76,2

Table 1 (continued)

Pitch code	b_{so}
XH	101,6
XXH	127

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5295:2023

<https://standards.iteh.ai/catalog/standards/sist/a9f64c35-5472-4dd6-852b-4f6826f5074e/iso-5295-2023>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 5295:2023

<https://standards.iteh.ai/catalog/standards/sist/a9f64c35-5472-4dd6-852b-4f6826f5074e/iso-5295-2023>