

FINAL
DRAFT

PUBLICLY
AVAILABLE
SPECIFICATION

ISO/DPAS
24499

ISO/TC 86/SC 8

Secretariat: ANSI

Voting begins on:
2023-12-21

Voting terminates on:
2024-02-15

Method of test for burning velocity measurement of A2L flammable gases

*Méthode d'essai pour mesurer la vitesse d'inflammabilité des gaz
inflammables A2L*

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/DPAS 24499](https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499)

<https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/DPAS 24499:2023(E)

© ISO 2023

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO/DPAS 24499

<https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
Introduction.....	vi
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Test Method.....	2
4.1 General.....	2
4.2 Principle of the test method.....	2
5 Measurements.....	4
5.1 General.....	4
5.2 Flame propagation velocity.....	4
5.3 Flame front area.....	5
5.4 Cross-sectional area of the flame base.....	5
6 Test method.....	5
6.1 General.....	5
6.2 Gas handling and mixtures preparation.....	7
6.3 The test tube.....	7
6.3.1 General.....	7
6.3.2 Dimensions.....	8
6.3.3 Position.....	9
6.3.4 Tube ends.....	9
6.3.5 Interchangeable damping orifices.....	9
6.3.6 Flame quenching.....	10
6.3.7 Tube glass type.....	10
6.3.8 Tube purging with test mixture.....	10
6.3.9 Tube etching.....	10
6.4 Ignition.....	11
6.4.1 General.....	11
6.4.2 Ignition type.....	11
6.4.3 Positioning.....	11
6.4.4 Electrodes.....	12
6.4.5 Power supply.....	12
6.4.6 Ignition time.....	12
6.5 Flame front visualization.....	12
6.5.1 General.....	12
6.5.2 Luminous zone and direct photography.....	12
6.5.3 Flame emission spectra.....	13
6.5.4 Acquisition camera.....	13
6.5.5 Exposure Time.....	13
6.5.6 Positioning.....	14
6.5.7 Scaling and optical distortion.....	14
6.5.8 Resolution of the flame images.....	15
6.6 Purge, exhaust and gas treatment systems.....	15
6.7 Test temperature setting.....	16
6.8 Experimental protocol for mixtures prepared using partial pressure technique.....	16
7 Evaluation and expression of results.....	17
7.1 General.....	17
7.2 Uncertainty.....	18
7.2.1 Uncertainty in the burning velocity.....	18
7.2.2 Uncertainty estimation of concentrations.....	18
8 Safety precautions.....	18

9	Overview on flame shape, propagation regimes and stability	19
9.1	Flame shape.....	19
9.2	Flame propagation regimes.....	19
9.3	Flame stability in tubes.....	20
9.4	Observations of flames in tubes.....	21
9.5	Flame quenching in circular tubes.....	21
9.6	Flame propagation velocity and tube diameter.....	22
9.7	Flame area calculation.....	22
	Bibliography	25

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/DPAS 24499](https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499)

<https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 86, *Refrigeration and air-conditioning*, Subcommittee SC 8, *Refrigerants and refrigeration lubricants*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Safety classification and relative flammability properties of refrigerants are a critical part of ISO 817. The flammability limits of refrigerant gas in air, as described in Annex B of ISO 817:—¹⁾ give a partial measure of the relative flammability. Another dimension of flammability is how fast a substance burns, releases energy and spreads a flame. One can measure the rate at which a flame front moves through a cloud of refrigerant gas in air, or its burning velocity (BV). This document describes one method that can be useful for BV measurement, and thereby better quantify and compare relative flame fronts for some refrigerant classes. In this test, a flame is allowed to propagate upward (vertically) through a well-mixed, quiescent column of a refrigerant-air mixture enclosed in an open-ended glass tube. Optical systems are used to measure the upward velocity of the flame front.

The measurement of BV has been widely used in the past to compare highly energetic fluids, such as motor fuels and rocket propellants. The BV measurement of slow burning fluids, such as ammonia and fluorinated refrigerants can be more difficult to measure due to the inherent instability of a slow flame. The low rate of energy evolution from a slow flame makes it susceptible to quenching from a variety of sources. For slow burning refrigerants, turbulence and convection currents, can break the flame front, and hence quench the flame. In addition, the test chamber surface can quench free radical flame intermediates as well as extract some of the heat necessary for flame propagation. Gas-phase thermal radiation is also important for flames with low burning velocity. These effects are important to note as they tend to diminish and sometimes quench a weak flame.

The use of the vertical tube method for BV characterization of slow burning refrigerants was the subject of doctoral research which was used in Annex C of ISO 817:— and is the basis for this document. [1] In addition, ASHRAE research notes the use and limitations of the vertical tube technique.[2][3] While the basic framework of the method is relatively simple, some sophisticated imaging instrumentation and mathematics are necessary to extract an average local burning velocity separate from the bulk burning speed as the flame progresses up the tube. Since 2004 other laboratories have used the basic principle of vertical tube method and have shown acceptable results for reproducing the measurement of R-32, at 6,7 +/- 0,7 cm/s. Slower burning velocities (i.e. <4 cm/s) become more difficult to measure reproducibility, so variability may increase as flame instability is increasing. The lower burning velocity limit of this method, as described, is between 3 cm/s and 4 cm/s, depending on the actual design and geometry of the apparatus being used. The uncertainty of the measurement of flames that burn more slowly than R-32 has not yet been determined in any multi lab comparative testing. The appealing aspects of this test are the relative simplicity and low cost of its implementation.

1) Under preparation. Stage at the time of publication: ISO/DIS 817:2023.

Method of test for burning velocity measurement of A2L flammable gases

1 Scope

This document specifies a method of measuring the burning velocity (BV) of slowly burning refrigerants (< 10 cm/s) for use with other standards that utilize the BV for determining safety classification of refrigerants (e.g. ISO 817) or that use the BV in establishing requirements on the use of slow burning refrigerants (e.g. ISO 5149).

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

blends

mixtures composed of two or more refrigerants

3.2

burning velocity

S_u

maximum velocity at which a laminar *flame* propagates in a normal direction relative to the unburned gas ahead of it

Note 1 to entry: This value is expressed in centimetres per second.

3.3

combustion

exothermic reaction between an oxidant (e.g. air) and a combustible fuel

3.4

compound

substance composed of two or more atoms chemically bonded in definite proportions

3.5

flame

space where combustion takes place, resulting in a temperature increase and light emission

3.6

flame propagation

combustion, causing a continuous *flame* which moves upward and outward from the point of ignition without the influence of the ignition source

3.7
flame propagation velocity
 S_s
velocity at which the continuous *flame* moves upward and outward from the point of ignition without the point of ignition and without the influence of the ignition source

3.8
flame surface area
 A_f
surface area of the *flame* generated during the combustion of the *flammable* gas

3.9
flammable
property of a mixture in which a *flame* is capable of self-propagating

3.10
quenching
effect of extinction of the flame near a surface due to heat conduction losses, absorption of active chemical species and viscous effects of the surface

3.11
refrigerant
fluid used for heat transfer in a refrigerating system, which absorbs heat at a low temperature and a low pressure of the fluid and rejects it at a higher temperature and a higher pressure of the fluid usually involving changes of the phase of the fluid

3.12
stoichiometric concentration
 C_{st}
concentration of a fuel in a fuel-air mixture that contains exactly the necessary quantity of air (approximately 21 % O₂ / 79 % N₂ by volume) needed for the complete oxidation of all the compounds (3.1.4) present

4 Test Method <https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>

4.1 General

The test method is based on:

- the initiation of the combustion of the gas, or blends of gases, in a stagnant homogeneous mixture with air contained in a vertical cylindrical tube;
- the observation and the recording of the flame propagation;
- determining the surface area of the flame.

The burning velocity is a function of the flammable gas concentration in the total mixture with air. The burning velocity reaches a maximum in the vicinity of the stoichiometric concentration.

This test method involves the use of hazardous substances and therefore requires, for a safe handling and testing, the knowledge of safety parameters and prevention measures. These measures shall be the user's responsibility. However, general safety precautions are given in [Clause 9](#).

4.2 Principle of the test method

The test method consists of initiating the combustion of a homogeneous mixture of a flammable gas (or a flammable mixture of gases) and air, contained in a vertical tube opened at the lower ignition end, and propagating a flame upwardly to the upper closed end; see [Figure 1](#). In the early stages of this

propagation, there is a phase of uniform movement during which the shape and the size of the flame are constant.

Taking into account the mass and species balance through the flame front, the burning velocity, S_u , is calculated from the knowledge of the flame propagation velocity, S_s , in the tube and the ratio of the flame front area to its base cross-sectional area. The volume of burned gas per second and per unit area, or the burning velocity, S_u , is obtained by dividing the mixture volume which is consumed per second, at the test temperature and pressure, by the flame surface area, A_f (the subscript "f" denotes the flame). The volume consumption of the mix per second is the volume swept by a cross-sectional area of the flame base, a_f , with a velocity equal to the flame propagation velocity S_s . [Formula \(1\)](#) is used to determine volume consumption per unit time.

$$S_u = S_s \times \frac{a_f}{A_f} \quad (1)$$

where

a_f is the cross-sectional area of the flame base;

A_f is the flame surface area;

S_s is the flame propagation velocity;


S_u is the burning velocity.

NOTE The cross-sectional area of the flame base is equal to the tube cross-section reduced by the quenching area (the area between the edge of the flame and the tube wall).

At a given temperature and pressure, the burning velocity is only a function of the type of flammable substance and its concentration with the oxidant and is dependent to a limited extent on the experimental apparatus.

[ISO/DPAS 24499](#)

<https://standards.iteh.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>

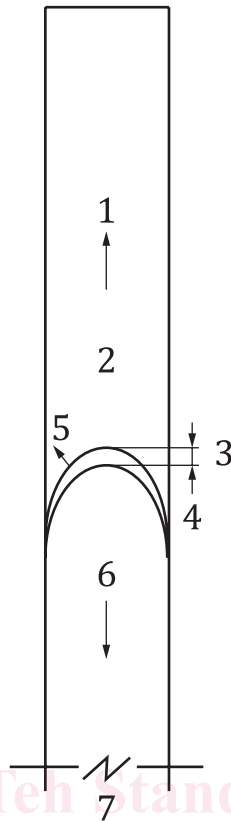

Key

- 1 direction of flame propagation
- 2 unburned mixture
- 3 flame front displacement
- 4 dx thickness of the combustion region
- 5 S_u
- 6 burnt gas
- 7 ignition

iTen Standards
 (https://standards.itih.ai)
 Document Preview

ISO/DPAS 24499

<https://standards.itih.ai/catalog/standards/sist/c8ab7d80-db04-4906-9f6f-333f5c4351c4/iso-dpas-24499>

Figure 1 — Schematic of the flame propagation in a vertical tube

5 Measurements

5.1 General

The measurement of the burning velocity requires the knowledge of the following three parameters of [Formula \(1\)](#):

- a) the flame propagation velocity, S_f ;
- b) the flame front area A_f ;
- c) the cross-sectional area of the flame base a_f .

5.2 Flame propagation velocity

The flame propagation velocity in the tube is required for the measurement of the burning velocity. As a condition to the derivation [Formula \(1\)](#), only parts of uniform flame propagation shall be considered in the measurements (constant S_f).

The linear propagation velocity of the flame is obtained from the direct measurement of the flame front displacement determined by two successive images with a known time interval (30 Hz to 50 Hz) of the camera acquisition frequency. More than one succession of images shall be used to check that the flame propagation is uniform. An image treatment is necessary in order to enhance the flame front shape and to locate on both images an identical luminous spot (pixels with equal brightness level) that corresponds to the same location on the front and deduce the flame front displacement. This procedure is proved necessary with low luminosity flames since any uncertainty in the flame front displacement leads to an uncertainty in the flame propagation velocity and thus on the burning velocity.

5.3 Flame front area

The flame front shape cannot be generated by the revolution of a parabola nor by the approximation by an ellipsoid segment, even though in many cases this shape is symmetrical. An accurate method is needed to calculate the flame front area A_f . For an upward propagation, the flame usually shows a symmetrical front surface referred to the tube axis. For a uniform propagation, the shape of the flame front remains constant. Fast moving flames are almost hemispherical, the slower flames are somewhat elongated.

9.7 describes a mathematical and geometrical model to calculate the flame front area. In summary, the flame front profile is marked with fitting points (20 to 40 fitting points) then divided into two or more horizontal sections. The fitting points shall be selected on the rim of the most luminous zone on the flame front.

For each section a polynomial fit equation of appropriate order is made in order to give the best fit curve to the points selected on that section. The best fit gives the minimum deviation of the fit curve to the fitting experimental points. The area of each section shall then be calculated separately by dividing it into many small elementary sections. The area of each elementary section is then calculated from the assumption of a revolution shape, taking into account the bottom edge of the flame not being horizontal.

5.4 Cross-sectional area of the flame base

The cross-sectional area, a_f , of the flame base shall be calculated from knowledge of the diameter d measured at the base of the flame as illustrated in 9.7. In that case, use [Formula \(2\)](#):

$$a_f = \frac{\pi d^2}{4} \quad (2)$$

where

a_f is the cross-sectional area of the flame base;

d is the diameter of the flame base.

6 Test method

6.1 General

Measuring the burning velocity in a tube consists of

- a) propagating a flame in a vertical transparent tube, opened at the lower ignition end, closed at the other upper end, and filled with the flammable mixture,
- b) measuring the velocity of the flame propagating along the tube, and
- c) recording the flame front area with a camera. Measurements are performed at atmospheric pressure.