

# INTERNATIONAL STANDARD

**ISO**  
**3353**

Second edition  
1992-11-01

---

---

## Aerospace — Rolled threads for bolts — Lead and runout requirements

**iTeh STANDARD PREVIEW**  
*Aéronautique et espace — Filetages roulés des vis — Filets incomplets  
côté tige (ou tête) et côté extrémité*  
**(standards.iteh.ai)**

ISO 3353:1992

<https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-5265db58c9b5/iso-3353-1992>



Reference number  
ISO 3353:1992(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3353 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Sub-Committee SC 4, *Aerospace fastener systems*.

This second edition cancels and replaces the first edition (ISO 3353:1976), which has been technically revised.

© ISO 1992

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

## Aerospace — Rolled threads for bolts — Lead and runout requirements

### 1 Scope

This International Standard specifies the lead and runout requirements for rolled threads for bolts, and the inspection method to be used in case of dispute.

It is also applicable to other threaded male parts, used in aerospace construction, provided that it is referenced in the definition document of the part.

### 2 Definitions

For the purposes of this International Standard, the following definitions apply.

**2.1 lead threads:** An area in which are located threads incompletely formed during rolling, beginning at the entering chamfer of the thread.

ISO 3353:1992

**2.2 runout threads:** An area in which are located threads incompletely formed during rolling, between the completely formed threads and the part which has not been rolled.

**2.3 completely formed thread:** A thread, the profile of which (ABC) is located, over an axial distance of  $1P$ , within the limits specified in the definition document for the thread. (See figure 1.)

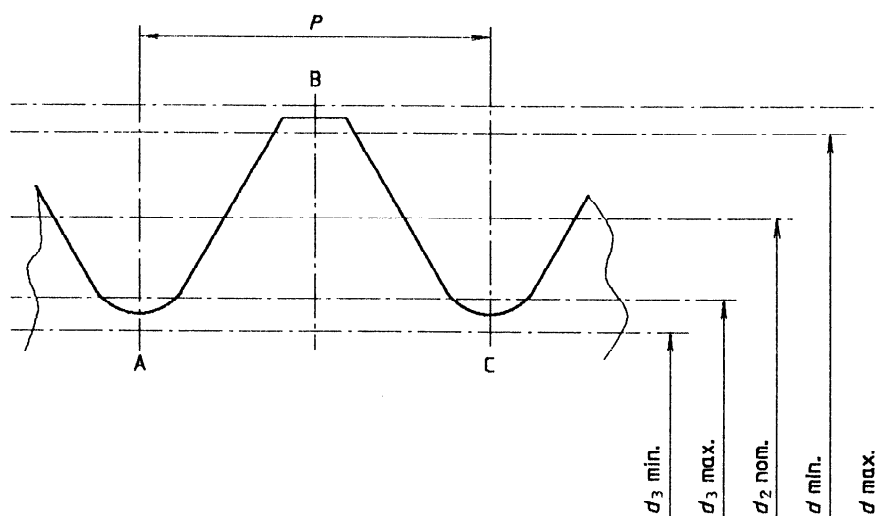


Figure 1

### 3 Symbols for threads

- $d$  = major diameter of the thread
- $d_2$  = pitch diameter of the thread
- $d_3$  = minor diameter of the thread
- $P$  = thread pitch


### 4 Lead and runout requirements

#### 4.1 General requirements

The flanks at the root of the incompletely formed threads shall be joined by a radius or by two radii and a flat, that are smooth and devoid of abrupt tool marks. This radius, or these radii, and the radius  $r$  (see figures 3 to 9) shall be not smaller than the minimum root radius specified for the complete threads in the definition document for the thread.

#### 4.2 Lead threads

See figure 2.

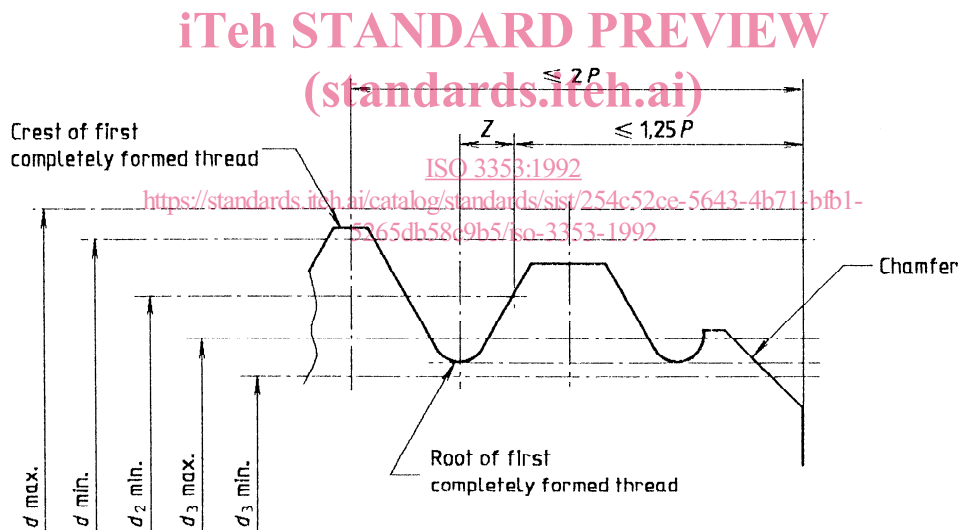

NOTE — Over the area  $Z$ , the thread shall lie within the limits specified in the definition document for the thread.


Figure 2

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 10.

4.3 Runout threads

4.3.1 Normal shank

See figures 3 and 4.

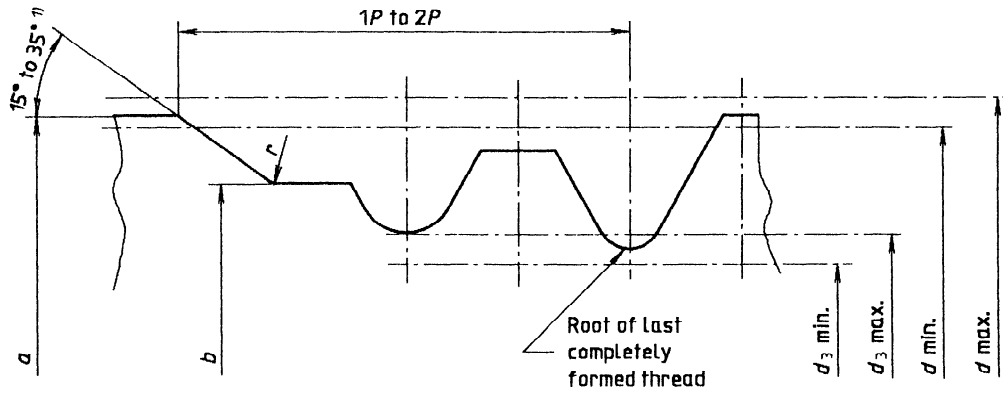

$a$  = shank diameter having a nominal value equal to the nominal diameter of the thread  
 $b$  = blank diameter


1) Angle before rolling. The shape is optional within these limits.

**iTeh STANDARD PREVIEW**  
 (standards.iteh.ai)

Figure 3

ISO 3353:1992

<https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-5265db58c9b5/iso-3353-1992>

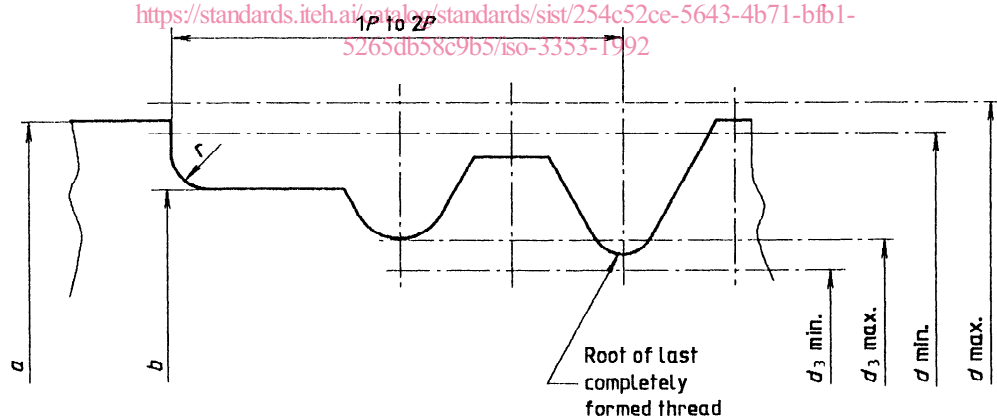


$a$  = shank diameter having a nominal value equal to the nominal diameter of the thread  
 $b$  = blank diameter

Figure 4

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 11.

4.3.2 Pitch diameter shank

See figure 5.

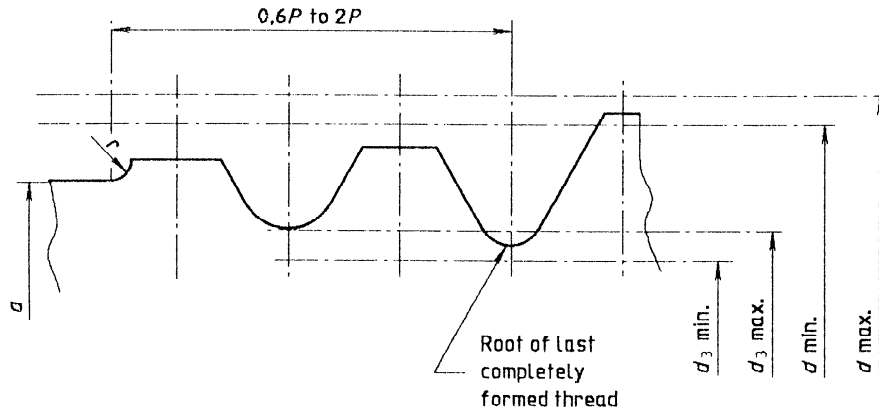

$a$  = shank diameter having a nominal value equal to the maximum pitch diameter

Figure 5


The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 12.

iTech STANDARD PREVIEW  
(standards.iteh.ai)

4.3.3 Stepped shank

ISO 3353:1992  
<https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-5265db58c9b5/iso-3353-1992>

See figure 6.

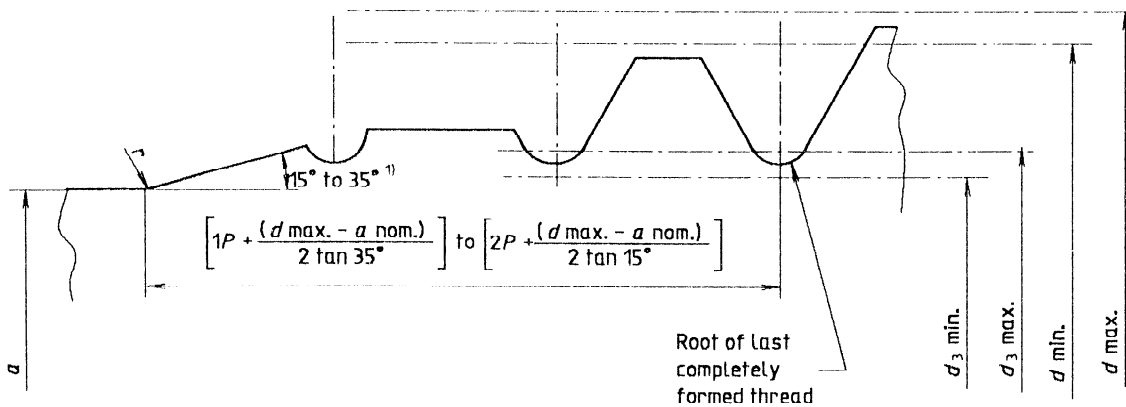

$a$  = diameter of stepped shank, having a nominal value equal to  $d_3$  min. - 0,1 mm

1) Angle before rolling. The shape is optional within these limits.


Figure 6

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 13.

#### 4.3.4 Screws threaded to the head and bolts threaded to a shoulder

##### 4.3.4.1 Protruding head

See figure 7.

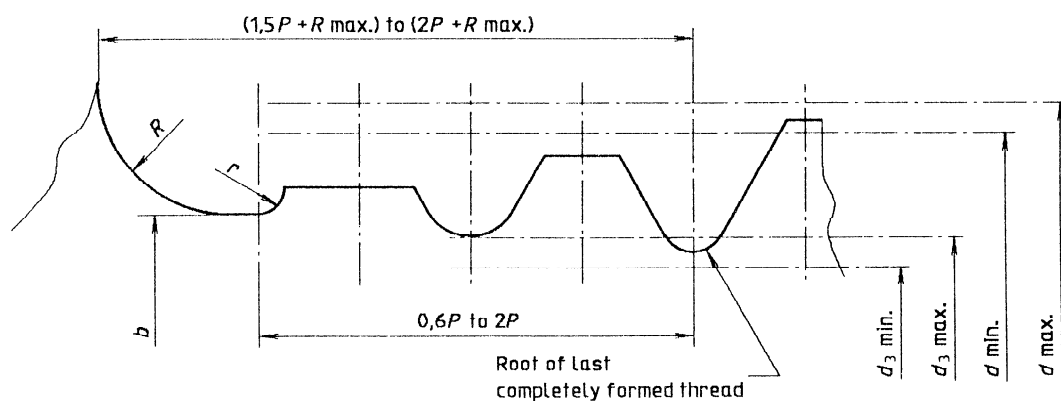

$b$  = blank diameter

NOTE — The radius  $r$  shall not encroach on the radius  $R$ .

## iTeh STANDARD PREVIEW (standards.iteh.ai)

Figure 7


The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 12.

[ISO 3353:1992](https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-5265db58c9b5/iso-3353-1992)

<https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-5265db58c9b5/iso-3353-1992>

##### 4.3.4.2 Flush head

See figure 8.

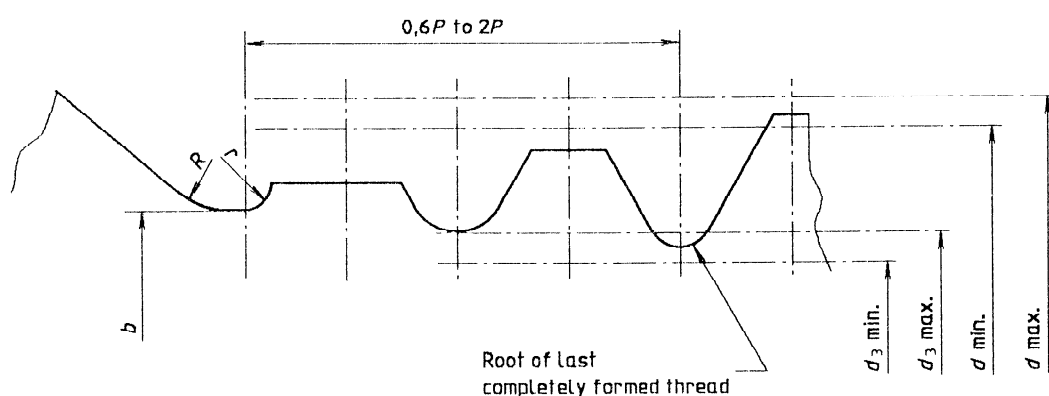

$b$  = blank diameter


NOTE — The radius  $r$  shall not encroach on the radius  $R$ .

Figure 8

The possible profile projection comparator inspection shall be carried out using a chart drawn in accordance with figure 12.

4.3.5 Oversized bolts (for example, bolts for repairs)

See figure 9.

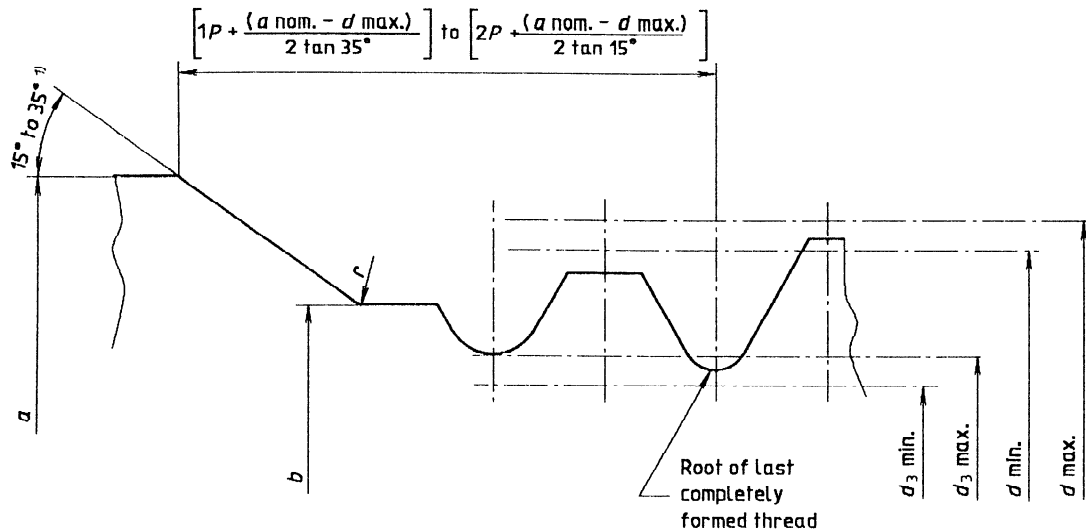

$a$  = diameter of oversized shank  
 $b$  = blank diameter

1) Angle before rolling. The shape is optional within these limits.

iteh STANDARD PREVIEW  
 (standards.iteh.ai)  
 Figure 9

ISO 3353:1992

The possible profile projection comparison inspection shall be carried out using a chart drawn in accordance with figure 14.

5 Inspection method

The method is left to the discretion of the manufacturer, provided that it ensures conformity with the requirements given in clause 4.

In case of dispute, the method by optical projection, defined hereafter, shall be used.

5.1 Use of the charts

The charts shall be used in conjunction with a profile projection comparator having a magnifying power equal to or greater than  $\times 20$ .



## 5.2 Procedure

### 5.2.1 For lead threads

The inspection shall be carried out using a chart drawn in accordance with figure 10.

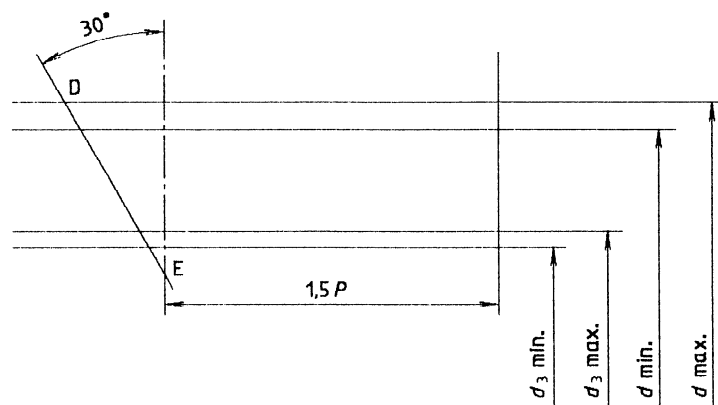


Figure 10

Rotate the bolt to find the first complete thread (see figure 1) nearest to the end of the shank which has the thread crest and root not extending beyond the limits defined by the horizontal lines.

Then move the bolt horizontally until the right flank of the above thread coincides with line DE.

### 5.2.2 For runout threads

ISO 3353:1992

[https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-](https://standards.iteh.ai/catalog/standards/sist/254c52ce-5643-4b71-bfb1-526418185676/iso-3353-1992)

The inspection shall be carried out using a chart drawn in accordance with figures 11 to 14.

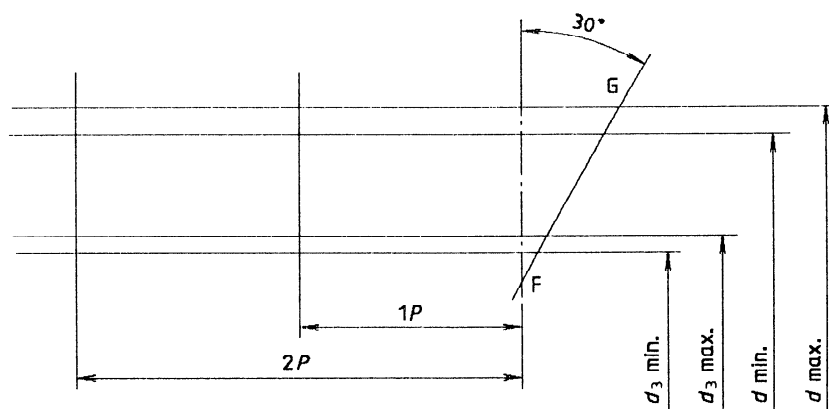


Figure 11