



Standard Test Method for Enhanced Performance of Combination Oven in Various Modes¹

This standard is issued under the fixed designation F2861; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the evaluation of the energy and water consumption and the cooking performance of combination ovens that can be operated in hot air convection, steam, and ~~combination~~ the combination of both hot air convection and steam modes. The test method is also applicable to convection ovens with ~~limited~~ moisture injection. The results of this test method can be used to evaluate a combination oven and understand its energy consumption.

1.2 This test method is applicable to gas and electric combination ovens that can be operated in convection, steam and combination modes.

1.3 The combination oven can be evaluated with respect to the following (where applicable):

1.3.1 Energy input rate and thermostat calibration (10.2).

1.3.2 Preheat energy consumption and time (10.3).

1.3.3 Idle energy rate in convection, steam and combination modes (10.4).

1.3.4 Pilot energy rate (if applicable) (10.5).

1.3.5 Cooking-energy efficiency, cooking energy rate, production capacity, water consumption and condensate temperature in steam mode (10.6).

1.3.6 Cooking-energy efficiency, cooking energy rate, and production capacity in convection mode (10.7).

1.3.7 Cooking uniformity in combination mode (10.8).

1.4 The values stated in inch-pound units are to be regarded as standard. The SI units given in parentheses are for information only.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards:*²

[D3588 Practice for Calculating Heat Value, Compressibility Factor, and Relative Density of Gaseous Fuels](#)

[F1217 Specification for Cooker, Steam](#)

[F1484 Test Methods for Performance of Steam Cookers](#)

[F1495 Specification for Combination Oven Electric or Gas Fired](#)

[F1496 Test Method for Performance of Convection Ovens](#)

~~[F1639 Test Method for Performance of Combination Ovens \(Withdrawn 2012\)](#)~~³

2.2 *ASHRAE Documents:*³

[ASHRAE Guideline 2-1986 \(RA90\) Engineering Analysis of Experimental Data](#)

[ASHRAE Guideline 2-1986 \(RA90\) Thermal and Related Properties of Food and Food Materials](#)

¹ This test method is under the jurisdiction of ASTM Committee F26 on Food Service Equipment and is the direct responsibility of Subcommittee F26.06 on Productivity and Energy Protocol.

Current edition approved Sept. 1, 2010/Jan. 1, 2014. Published December 2010/February 2014. Originally approved in 2010. Last previous edition approved in 2010 as F2861 – 10. DOI: 10.1520/F2861-10; 10.1520/F2861-14.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ See the ASHRAE Handbook of Fundamentals, available from the American Society of Heating, Refrigeration, and Air Conditioning Engineers, Inc., 1791 Tullie Circle, NE, Atlanta, GA 30329.

3. Terminology

3.1 Definitions:

3.1.1 *combination mode, n*—for the purposes of this test method, combination mode is defined as moist heat at 350°F (177°C) with the humidity and fan set to operate at their maximum settings, hereafter referred to as combi mode.

3.1.2 *combination oven, n*—device that combines the function of hot air convection (oven mode), ~~saturated and superheated steam heating (steam mode), and combination convection/steam mode for moist heating,~~ a combination of both to perform steaming, which includes low or high temperature steaming, baking, roasting, rethermalizing, and proofing of various food products. In general, the term combination oven is used to describe this type of equipment, which is self contained. ~~The combination oven is also referred to as a combination oven/steamer, combi or combo.~~

3.1.3 *condensate, n*—mixture of condensed steam and cooling water, exiting the combination oven and directed to a drain.

3.1.4 *convection mode, n*—for the purposes of this test method, convection mode is defined as dry heat only at 350°F (177°C) with the fan set to operate at the maximum setting.

3.1.5 *cooking-energy efficiency, n*—quantity of energy imparted to the specified food product, expressed as a percentage of energy consumed by the combination oven during the cooking event.

3.1.6 *cooking energy rate, n*—average rate of energy consumption (Btu/h (kJ/h) or kW) during the cooking-energy efficiency tests.

3.1.7 *energy input rate, n*—peak rate at which a combination oven consumes energy (Btu/h (kJ/h) or kW).

3.1.8 *idle energy rate, n*—combination oven’s rate of energy consumption (Btu/h (kJ/h) or kW), when empty, required to maintain its cavity temperature at the specified thermostat set point.

3.1.9 *oven cavity, n*—that portion of the combination oven in which food products are heated or cooked.

3.1.10 *pilot energy rate, n*—rate of energy consumption (Btu/h (kJ/h)) by a combination oven’s continuous pilot (if applicable).

3.1.11 *preheat energy, n*—amount of energy consumed (Btu (kJ) or kWh), by the combination oven while preheating its cavity from ambient temperature to the specified thermostat set point.

3.1.12 *preheat time, n*—time (in min) required for the combination oven cavity to preheat from ambient temperature to the specified thermostat set point.

3.1.13 *production capacity, n*—maximum rate (lb/h (kg/h)) at which a combination oven can bring the specified food product to a specified “cooked” condition. May also be referred to as throughput.

3.1.14 *production rate, n*—rate (lb/h (kg/h)) at which a combination oven brings the specified food product to a specified “cooked” condition. Does not necessarily refer to maximum rate. Production rate varies with the amount of food being cooked.

3.1.15 *rack trolley, n*—as used in this test method, refers to a cart with integrated frame for holding pans that is designed for ease of loading and unloading product in a floor model (Specification **F1495** Type 3) combination oven.

3.1.16 *steam generator, n*—as used in this test method, refers to one of three distinct methods which all conform to Grade A classification in **F1217**, 0 to 2.9 psig maximum compartment pressure:

3.1.16.1 *Discussion*—

Injection refers to direct placement of water onto a hot surface in the cavity for moisture production (Specification **F1495** Classification Style Injection).

3.1.16.2 *Discussion*—

Boiler refers to a compartment outside the oven cavity through which water is heated for moisture production (Specification **F1495** Classification Style Boiler).

3.1.16.3 *Discussion*—

Water bath refers to a compartment inside the oven cavity through which water is heated for moisture production (Specification **F1495** Classification Style Water Bath).

3.1.17 *steam mode, n*—for the purposes of this test method, steam mode is defined as the maximum humidity setting at ~~212°F~~ a nominal 212°F (100°C).

3.1.18 *uncertainty, n*—measure of systematic and precision errors in specified instrumentation or measure of repeatability of a reported test result.

4. Summary of Test Method

4.1 Accuracy of the combination oven thermostat is checked at a setting of 350°F (177°C). This is accomplished by comparing the oven's temperature control setting with the temperature at the center of the oven's cavity. If necessary, the control is adjusted so that the maximum difference between its reading and the temperature at the center of the cavity is no more than $\pm 5^\circ\text{F}$ ($\pm 2.8^\circ\text{C}$).

4.2 Energy input rate is determined to confirm that the combination oven is operating within 5 % of the nameplate energy input rate. For gas combination ovens, the pilot energy rate and the fan and control energy rates are also determined.

4.3 The time and energy required to preheat the oven from room temperature ($75 \pm 5^\circ\text{F}$ ($24 \pm 3^\circ\text{C}$)) to a ready-to-cook state (350°F (177°C)), maximum humidity, if adjustable) is determined.

4.4 Idle energy rate is determined with the combination oven set to maintain a ready-to-cook state without cooking in three operating modes—combi mode ($350 \pm 5^\circ\text{F}$ ($177 \pm 2.8^\circ\text{C}$)), ($177 \pm 2.8^\circ\text{C}$), maximum humidity, if adjustable), convection mode ($350 \pm 5^\circ\text{F}$ ($177 \pm 2.8^\circ\text{C}$)), and steam mode ($212 \pm 2^\circ\text{F}$, (nominal 212°F (100°C), maximum humidity, if adjustable).

4.5 Cooking-energy efficiency, cooking energy rate and production rate are determined in steam mode and convection mode while cooking potatoes.

4.6 Water consumption (gal/h (L/h)) is monitored during idle conditions in steam mode, combi mode and convection mode and while cooking potatoes in steam mode and convection mode to characterize the rate of water usage.

4.7 Condensate temperature is monitored to characterize the combination oven's average and maximum drain temperature.

4.8 The uniformity of heating within the combi's combination oven's compartment is determined and reported based on the average temperature on each pan during ice load cooking tests (pans of ice simulating pans of frozen food).

5. Significance and Use

5.1 The energy input rate test and thermostat calibration are used to confirm that the combination oven is operating properly prior to further testing and to ensure that all test results are determined at the same temperature.

5.2 Preheat energy and time can be useful to food service operators to manage power demands and to know how quickly the combination oven can be ready for operation.

5.3 Idle energy rate and pilot energy rate can be used to estimate energy consumption during non-cooking periods.

5.4 Cooking-energy efficiency is a precise indicator of combination oven energy performance under various operating conditions. This information enables the food service operator to consider energy performance when selecting a combination oven.

5.5 Production capacity can be used by food service operators to choose a combination oven that matches their food output requirements.

5.6 Water consumption characterization is useful for estimating water and sewage costs associated with combination oven operation.

5.7 Condensate temperature measurement is useful to verify that the condensate temperature does not violate applicable building codes.

5.8 Cooking uniformity provides information regarding the combi's combination oven's ability to cook food at the same rate throughout the combi's oven compartment.

6. Apparatus

6.1 *Analytical Balance Scale*, for measuring weights up to 20 lb (9.0 kg), with a resolution of 0.01 lb (0.005 kg) and an uncertainty of 0.01 lb (0.005 kg).

6.2 *Barometer*, for measuring absolute atmospheric pressure, to be used for adjustment of measured natural gas volume to standard conditions, having a resolution of 0.2 in. Hg (670 Pa) and an uncertainty of 0.2 in. Hg (670 Pa).

6.3 *Canopy Exhaust Hood*, 4-ft (1.2-m) in depth, wall-mounted with the lower edge of the hood 72 in. (2.0 m) from the floor and with the capacity to operate at a nominal exhaust ventilation rate of 300 cfm per linear foot (360 L/s per linear meter) of active hood length. This hood shall extend a minimum of 6 in. (150 mm) past both sides and the front of the cooking appliance and shall not incorporate side curtains or partitions.

6.4 *Flowmeter*, for measuring total water consumption of the appliance, having a resolution of 0.01 gal (40 mL) and an uncertainty of 0.01 gal (40 mL) at a flow rate as low as 0.2 gpm (13 mL/s).

6.5 *Gas Meter*, for measuring the gas consumption of a combination oven, shall be a positive displacement type with a resolution of at least 0.01 ft^3 (0.0003 m^3) and a maximum uncertainty no greater than 1 % of the measured value for any demand greater than $2.2 \text{ ft}^3/\text{h}$ ($0.06 \text{ m}^3/\text{h}$). If the meter is used for measuring the gas consumed by the pilot lights, it shall have a resolution of at least 0.01 ft^3 (0.0003 m^3) and a maximum uncertainty no greater than 2 % of the measured value.

6.6 *Pressure Gage*, for monitoring natural gas pressure, having a range from 0 to 15 in. H₂O (0 to 3.7 kPa), a resolution of 0.5 in. H₂O (125 Pa), and a maximum uncertainty of 1 % of the measured value.

6.7 *Stopwatch*, with a 1-s resolution.

6.8 *Temperature Sensor*, for measuring natural gas temperature in the range from 50 to 100°F (10 to 40°C), with an uncertainty of ±1°F (0.3°C).

6.9 *Calibrated Exposed Junction Thermocouple Probes*, with a range from –20 to 400°F (–30 to 200°C), with a resolution of 0.2°F (0.1°C), and an uncertainty of 0.5°F (0.3 °C), for measuring oven cavity and food product temperatures. Calibrated Type K thermocouples (24 GA wire) are a good choice.

6.10 *Thermocouple Probes*, with a range from 0 to 450°F (250°F (–18 to 232°C); 121°C), with a resolution of 0.2°F (0.1°C), and an uncertainty of 0.5°F (0.3°C), for measuring temperature of the ~~combination oven cavity, food product, water entering the combination oven and condensate water entering the drain.~~

6.11 *Watt-hour Meter*, for measuring the electrical energy consumption of a combination oven, having a resolution of at least 10 Wh and a maximum uncertainty no greater than 1.5 % of the measured value for any demand greater than 100 W. For any demand less than 100 W, the meter shall have a resolution of at least 10 Wh and a maximum uncertainty no greater than 10 %.

6.12 *Hotel Pans*, for ice loads, solid 12 by 20 by 2½-in. (300 by 500 by 65-mm) stainless steel, weighing 2.8 ± 0.2 lb (1.3 ± 0.1 kg), with a temperature sensor located in the center of each pan 5/8 in. (16 mm) from the bottom. A convenient method is to have Type T thermocouple probes with a stainless-steel protective sheath fabricated in the shape shown in Fig. 1. The sensing point is exposed and isolated thermally from the stainless-steel sheath. The probe is strapped to the pan using steel shim stock welded to the pan using a strain gage welder. The thermocouple lead TFE-fluorocarbon sheath is minimum thickness (TFE-fluorocarbon wrap rather than extruded TFE-fluorocarbon) to minimize the escape of steam where the thermocouple exits the cooking compartment. The lead is long enough to allow connection to the monitoring device while the ice loads are in the freezer, while they are being weighed, and while they are in the oven.

6.13 *2/3 Hotel Pans*, for ice loads, 13.875 by 12.750 by 2.5 in. (352 by 323 by 64 mm) stainless steel, weighing 1.8 ± 0.2 lb (0.8 ± 0.1 kg), with a temperature sensor located in the center of each pan 5/8 in. (16 mm) from the bottom (Fig. 1).

7. Reagents and Materials

7.1 *Water*, incoming water to the appliance shall have a maximum hardness of three grains per gallon and shall be within 70 ± 5°F (21 ± 3°C). If the tester's water supply does not meet the specification, a water softener or tempering kit or both may be required.

7.2 *Red Potatoes*, for the steam mode efficiency tests shall be fresh, whole, US No. 1, Size B, red potatoes. The average weight of the potatoes shall be 0.16 ± 0.02 lb (73 ± 9 g).

NOTE 1—Red potatoes are sold in three sizes: A, B, and C. This test uses Size B.

7.3 *Russet Potatoes*, for the convection mode efficiency tests shall be fresh, whole, prewashed, U.S. No. 1 Russets. Size shall be 100 count. The average weight of the potatoes shall be 0.48 ± 0.02 lb (218 ± 91 g).

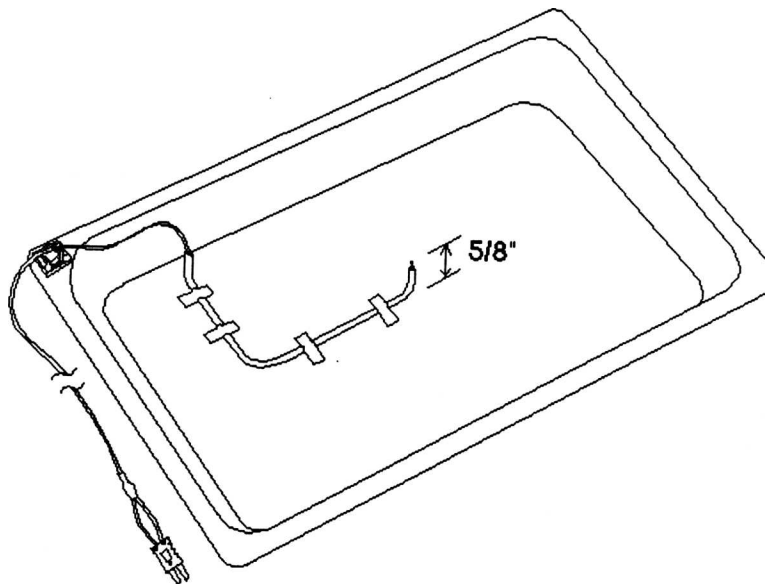


FIG. 1 Hotel Pan with Thermocouple Probe for Ice Loads

7.4 Steam Pans, for the steam performance tests on half and full size combination ovens (Specification **F1495**, Classification Capacity A and B), shall be perforated 12 by 20 by 2½ in. (325(323 by 530508 by 6564 mm) stainless steel weighing 2.5 ± 0.5 lb (1.1 ± 0.2 kg).

7.5 Shallow Steam Pans, for the convection performance tests on half and full size combination ovens (Specification **F1495**, Classification Capacity A and B), shall be perforated 12 by 20 by 1¼ in. (325(323 by 530508 by 2532 mm) stainless steel weighing 2.1 ± 0.5 lb (0.95 ± 0.2 kg).

7.6 Two-Thirds Size Pans, for testing 2/3-size combination ovens (Specification **F1495**, Classification Capacity C), shall be 13.875 by 12.750 by 2½ in. (352 by 323 by 64 mm) stainless steel weighing 1.6 ± 0.5 lb (0.7 ± 0.2 kg).

8. Sampling and Test Units

8.1 *Combination Oven*—Select a representative production model for performance testing.

9. Preparation of Apparatus

9.1 Install the appliance according to the manufacturer's instructions under a canopy exhaust hood. Position the combination oven so that a minimum of 6 in. is maintained between the edge of the hood and the vertical plane of the front and sides of the appliance. In addition, both sides of the combination oven shall be a minimum of 3 ft (1.1 m) from any side wall, side partition, or other operating appliance. The exhaust ventilation rate shall be 300 cfm per linear foot (360 L/s per linear meter) of hood length. The associated heating or cooling system shall be capable of maintaining an ambient temperature of 75 ± 5°F (24 ± 3°C) within the testing environment when the exhaust ventilation system is operating.

9.2 Connect the combination oven to a calibrated energy test meter. For gas installations, install a pressure regulator downstream from the meter to maintain a constant pressure of gas for all tests. Install instrumentation to record both the pressure and temperature of the gas supplied to the combination oven and the barometric pressure during each test so that the measured gas flow can be corrected to standard conditions. For electric installations, a voltage regulator may be required during tests if the voltage supply is not within ±2.5 % of the manufacturer's nameplate voltage.

9.3 For an electric combination oven, confirm (while the combination oven elements are energized) that the supply voltage is within ±2.5 % of the operating voltage specified by the manufacturer. Record the test voltage for each test.

NOTE 2—If an electric combination oven is rated for dual voltage (for example, 208/240 V), the voltage selected by the manufacturer or tester, or both, shall be reported. If an oven is designed to operate at two voltages without a change in the resistance of the heating elements, the performance of the oven (for example, preheat time) may differ at the two voltages.

9.4 For a gas combination oven, adjust (during maximum energy input) the gas supply pressure downstream from the appliance's pressure regulator to within ±2.5 % of the operating manifold pressure specified by the manufacturer. Make adjustments to the appliance following the manufacturer's recommendations for optimizing combustion.

9.5 Install a flowmeter to the combination oven water inlet such that total water flow to the appliance is measured. 14

9.6 Install temperature sensors at the point where the drain water exits the combination oven and in the drain line such that the sensor is immersed in the condensate water path just as it enters the drain.

9.7 Tape a temperature sensor firmly to the surface of a section of the metal tubing through which city water enters the combination oven.

9.8 Install a water regulator on incoming water lines. Adjust the dynamic water pressure to 45 psi (3.1 bar).

9.9 Determine the test capacity of the combination oven. For half-size (Capacity A) and full-size (Capacity B) combination ovens, the test capacity is equivalent to the manufacturer's stated capacity of standard 12 by 20 by 2½ in. (323 by 508 by 64 mm) hotel pans. For two-third size combination ovens (Capacity C), the test capacity is the manufacturer's stated capacity of 13.875 by 12.750 by 2½ in. (352 by 323 by 64 mm) hotel pans. This will be the test capacity for all cooking tests (10.6, 10.7, 10.8).

9.10 For countertop (Specification **F1495** Type 1) and stand mounted (Specification **F1495** Type 2) combination ovens, the pan rack shall remain inside the oven for all tests. For floor model (Specification **F1495** Type 3) combination ovens designed for operation with a removable rack trolley, the manufacturer may provide removable bridge or a second rack trolley to close any remaining gap in the door when the rack is outside the oven during the stabilization period prior to conducting the cooking tests (10.6, 10.7, and 10.8).

10. Procedure

NOTE 3—Prior to starting these tests, the tester should read the operating manual and fully understand the operation of the appliance.

10.1 General:

10.1.1 For gas appliances, record the following for each test run:

10.1.1.1 Higher heating value,

10.1.1.2 Standard gas pressure and temperature used to correct measured gas volume to standard conditions,

10.1.1.3 Measured gas temperature,

10.1.1.4 Measured gas pressure,

10.1.1.5 Barometric pressure, and

10.1.1.6 Energy input rate during or immediately prior to test (for example, during the preheat for that ~~days~~^{day's} testing).

NOTE 4—Using a calorimeter or gas chromatograph in accordance with accepted laboratory procedures is the preferred method for determining the higher heating value of gas supplied to the combination oven under test. It is recommended that all testing be performed with gas having a higher heating value of 1000 to 1075 Btu/ft³.

10.1.2 For gas combination ovens, add electric energy consumption to gas energy for all tests, with the exception of the energy input rate test (see 10.3).

10.1.3 For electric combination ovens, record the following for each test run:

10.1.3.1 Voltage while elements are energized, and

10.1.3.2 Energy input rate during or immediately prior to test (for example, during the preheat for that days' testing).

10.1.4 For each test run, confirm that the peak input rate is within $\pm 5\%$ of the rated nameplate input. If the difference is greater than $\pm 5\%$, terminate testing and contact the manufacturer. The manufacturer may make appropriate changes or adjustments to the combination oven.

10.1.5 For all tests, measure and record the ambient temperature, oven cavity temperature, incoming water temperature and condensate drain temperature.

10.2 Energy Input Rate and Thermostat Calibration:

10.2.1 Install a thermocouple at the geometric center (top to bottom, side to side, and front to back) of the combination oven cooking cavity. For floor mounted (Type 3) combination ovens with a removable rack trolley, place the rack trolley inside the oven.

10.2.2 Set the temperature control to 350°F (177°C); set the controls to operate in the ~~combination~~combi mode at maximum humidity; and turn the combination oven on. Record the time and energy consumption from the time when the unit is turned on until the time when any of the burners or elements (combination oven) first cycle off.

10.2.3 Calculate and record the combination oven's energy input rate and compare the result to the rated nameplate input. For gas combination ovens, only the burner energy consumption is used to compare the calculated energy input rate with the rated gas input; any electrical energy use shall be calculated and recorded separately as the fan/control energy rate.

10.2.4 Allow the combination oven to idle for 60 min after the burners or elements commence cycling at the thermostat set point.

10.2.5 After the 60-min idle period, start monitoring the combination oven cavity temperature, and record the average temperature over a 15-min period. If this recorded temperature is $350 \pm 5^\circ\text{F}$ ($177 \pm 3^\circ\text{C}$), then the combination oven's thermostat is calibrated.

10.2.6 If the average temperature is not $350 \pm 5^\circ\text{F}$ ($177 \pm 3^\circ\text{C}$), adjust the combination oven's temperature control following the manufacturer's operator instructions and repeat 10.2.5 until it is within this range. Record the corrections made to the controls during calibration.

10.2.7 In accordance with 11.4, calculate and report the combination oven energy input rate, fan/control energy rate where applicable, and rated nameplate input.

10.3 Preheat Energy Consumption and Time:

10.3.1 The preheat test shall be run as the first test of the day after allowing the oven to cool down for a minimum of 12 ~~hours~~^h.

NOTE 5—It is the intent of the preheat test to determine the amount of time for the ~~combi~~combination oven to reach a ready-to-cook state in each mode after it has been off for an extended period (e.g., (for example, overnight). The preheat tests for each mode should be conducted as the first appliance operation on the day of tests for each operating mode (e.g., (for example, combi, convection, steam).

10.3.2 For floor mounted (Type 3) combination ovens with a removable rack trolley, place the rack trolley inside the oven.

10.3.3 Fill the boiler or reservoir (~~combi~~with boilers)-(boiler or water-bath style combination ovens). Record the time required to fill it. Monitor the average temperature of the water as it enters the boiler or reservoir. If the average temperature was not $70 \pm 5^\circ\text{F}$ ($21 \pm 3^\circ\text{C}$), then allow the filled boiler or reservoir to sit until the temperature is within that range. Temperature of the water in the boiler can be estimated by measuring the boiler surface temperature using a surface temperature probe.

NOTE 6—In some units the filling and heating phases cannot be individually controlled. Heating may start as soon as the water level reaches the minimum while still filling the entire unit.

10.3.4 Verify that the combination oven cavity temperature is $75 \pm 5^\circ\text{F}$ ($24 \pm 3^\circ\text{F}$). Set the calibrated temperature control to 350°F; set the controls to operate in the ~~combination~~combi mode at maximum humidity and the fan set to operate in the maximum speed; and turn the combination oven on.

10.3.5 Record the time, temperature, and energy consumption required to preheat the combination oven, from the time when the unit is turned on until the time when the combination oven cavity reaches a temperature of $350 \pm 2^\circ\text{F}$ ($177 \pm 1^\circ\text{C}$).

10.3.6 In accordance with 11.5, calculate and report the preheat energy consumption and time, and generate a preheat temperature versus time graph.

10.3.7 After allowing the oven to cool for a minimum of 12 ~~hours, h,~~ determine the preheat energy consumption and time for the oven operating in convection mode. Repeat ~~10.3.1 through 10.3.4~~10.3.6 with the oven set to operate in convection (dry heat) mode, with the fan set to operate at its maximum speed and the oven cavity vent in the closed position.

10.3.8 After allowing the oven to cool for a minimum of 12 ~~hours, h,~~ determine the preheat energy consumption and time for the oven operating in steam mode. Set the oven to steam mode (maximum humidity, maximum fan speed) at $212 \pm 2^\circ\text{F}$ ($100 \pm 1^\circ\text{C}$). ~~Repeat a nominal temperature setting of 212°F 10.3.1 through~~(100°C), based 10.3.4 on the manufacturer controls.

10.3.9 Start the preheat and monitor energy consumption and time as soon as the unit is turned on. For a gas combination oven, the recorded preheat time shall include any delay between the time the unit is turned on and when the burners actually ignite. Preheat is judged complete when the primary burners, elements, or steam coil cycles off or when the steamer compartment reaches 205°F. Record preheat energy consumption, duration, and final temperature.

10.3.10 In accordance with 11.5, calculate and report the preheat energy consumption and time, and generate a preheat temperature versus time graph.

10.4 *Idle Energy Rate:*

NOTE 7—It is the intent of the idle test to determine the average energy and water use under each operating mode (combination, convection and steam), while not cooking food.

10.4.1 For floor mounted (Type 3) combination ovens with a removable rack trolley, place the rack trolley inside the oven.

10.4.2 Determine the idle energy rate in ~~combination~~combi mode. Set the temperature controls to maintain the average cavity air temperature at $350 \pm 5^\circ\text{F}$ ($177 \pm 2.8^\circ\text{C}$) and the oven set to operate in full ~~combination~~combi mode (maximum humidity, maximum fan speed), then turn the combination oven on.

10.4.3 Allow the combination oven to stabilize at these settings for 60 min after the burners or elements commence cycling in that mode.

10.4.4 At the end of 60 min stabilization period, begin recording the elapsed time, oven cavity temperature, and combination oven energy and water consumption for a minimum of 3 h.

10.4.5 At the end of the ~~3-hour~~3-h test, stop saving data, turn off the oven and open the door to cool and vent the cavity. Leave the door open for a minimum of 10 min to allow the cavity to fully vent before running additional idle tests.

10.4.6 Determine the idle energy rate in convection mode. Set the oven to operate in convection (dry heat) mode, with the fan set to operate at its maximum speed and the oven cavity vent in the closed position. Turn the oven on and repeat ~~10.4.2~~10.4.3 through ~~10.4.4~~10.4.5.

10.4.7 Determine the idle energy rate in steam mode. Set the oven to ~~operated~~operate in steam mode (maximum humidity, maximum fan speed) at $212 \pm 2^\circ\text{F}$ ($100 \pm 1^\circ\text{C}$). ~~a nominal 212°F (100°C).~~ Turn the oven on and repeat ~~10.4.2~~10.4.3 through ~~10.4.4~~10.4.5.

10.4.8 In accordance with 11.6, calculate and report the combination oven's idle energy rate and water consumption rate in each operating mode.

10.5 *Pilot Energy Rate (if applicable, for standing pilots):*

10.5.1 For a gas combination oven with a standing pilot, set the gas valve at the "pilot" position, and set the combination oven's temperature control to the "off" position.

10.5.2 Light and adjust the pilot according to the manufacturer's instructions.

10.5.3 Monitor gas consumption for a minimum of 8 h of pilot operation.

10.5.4 In accordance with 11.7, calculate and report the pilot energy rate.

10.6 *Steam Mode Cooking Energy Efficiency:*

10.6.1 The steam mode cooking energy efficiency test shall be repeated a minimum of three times. Additional test runs may be necessary to obtain the required precision for the reported test results (**Annex A1**). The reported values of cooking energy efficiency, production capacity, cooking energy rate, condensate temperature, and water consumption shall be the average of the replications (runs).

10.6.2 Determine the number of pans to For half-size (Capacity A) and full-size (Capacity B) combination ovens, the steam pans as specified in 7.4 shall be used for the steam mode cooking-energy efficiency test. The load is equivalent to the manufacturer's stated capacity of standard 12 by 20 by 2 tests. For two-thirds size (Capacity C) combination ovens the steam $\frac{1}{2}$ -in. (325 by 530 by 65 mm) hotel pans. Steam pans as ~~pans~~ specified in ~~7.4~~7.6 shall be used for the steam mode cooking-energy efficiency tests.

10.6.3 Number each steam pan and record the weight of each (empty) steam pan.

10.6.4 Prepare a minimum number of loads for three test runs. Load For half-size (Capacity A) and full-size (Capacity B) combination ovens, load each steam pan with 8.0 ± 0.2 lb (3.6 ± 0.1 kg) of red potatoes (7.2). Each pan shall contain between 48 and 52 red potatoes (see Fig. 2). For two-thirds size (Capacity C) combination ovens, load each steam pan with 5.3 ± 0.2 lb (2.4 ± 0.1 kg) of red potatoes (7.2). Each pan shall contain between 32 and 36 red potatoes. Record the actual weight and count of the potato load in each pan.

NOTE 8—If the weight of the potatoes on a pan is outside the 8.0 ± 0.2 lb (3.6 ± 0.1 kg) weight range specified above, substitute smaller or larger potatoes, as necessary, until the weight of the potatoes on each pan is within the required weight range while maintaining a count of 50 ± 2 potatoes per pan.

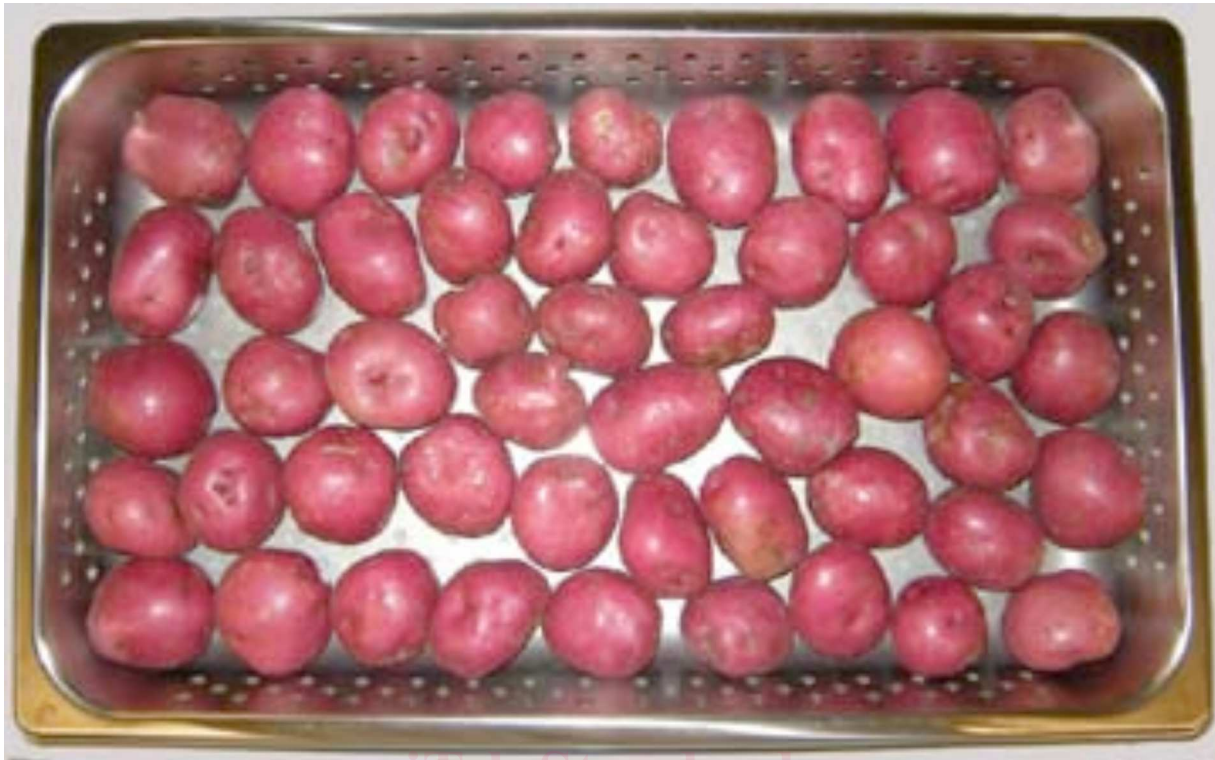


FIG. 2 Red Potato Load

10.6.5 Choose a cooking time either based on the manufacturer's recommendation. If the combination oven has a removable rack trolley, the rack trolley shall remain outside the oven until loading takes place (10.6.10 or by experience). A manufacturer-supplied bridge or supplemental rack trolley may be required. Refer to the oven operator's manual.

10.6.6 Randomly For half-size (Capacity A) and full-size (Capacity B) combi ovens, randomly select 20 potatoes from the potato load for temperature monitoring, such that the monitored potatoes are located on each level of the combination oven, from top to bottom. For 2/3-size (Capacity C) combi ovens, select 10 potatoes from the potato load for temperature monitoring.

NOTE 9—For a given pan, monitor potatoes at different combinations of locations for each test run. For example, if for Run No. 1, potatoes on Pan No. 5 are monitored at Location Nos. 5, 17, and 29, potatoes on this pan are not to be monitored at this same combination of locations during subsequent test runs.

10.6.7 Shortly before each test run, place a thermocouple into the center of the randomly-selected potatoes. The thermocouple shall be inserted from the long end of oblong-shaped potatoes, into the potato's center. Secure each thermocouple lead wire in such a manner that its junction will remain at the center of the potato throughout the cooking period. The temperature of the potatoes at the start of each test shall be $75 \pm 5^\circ\text{F}$ ($24 \pm 3^\circ\text{C}$). If the Type 3 combination oven has a removable rack, load the pans of potatoes onto the rack. The temperature of the rack, pan and potatoes at the start of each test shall be $75 \pm 5^\circ\text{F}$ ($24 \pm 3^\circ\text{C}$).

10.6.8 Allow the combination oven to stabilize in a ready-to-cook (212°F (100°C)), maximum humidity, maximum fan speed) state for a minimum of 1 h.

NOTE 10—The combination oven shall be stabilized in the same operating mode that will be used for the cooking test. If the combination oven is to be tested in a reduced-input mode, then the oven shall be stabilized in the same mode for at least 1 h prior to loading with food product.

10.6.9 After the stabilization period, wait for the burners, or elements to cycle on and then off again. This assures a consistent starting point for replicate test runs.

10.6.10 When the oven ready light or heat on light goes off, begin recording the oven energy consumption. Open the oven door immediately, and allow it to remain open for the entire loading period, as indicated in 10.6.11. Do not close the door, even if the pan loading is completed in less than the allotted time. At the end of the load period, close the oven door and record the initial average potato temperature to the nearest 0.1°F (0.06°C). Record the time as the beginning of the cooking period.

10.6.11 The total loading time (the time from opening the first compartment to closing and starting the last compartment) shall be the total of 5 s per pan for each load used (for example, the total loading time for a test of a six-pan capacity, full-size combination oven would be: $5 \text{ s/pan} \times 12 \text{ pans} = 60 \text{ s}$). For Type 3 combination ovens with a removable rack trolley, the maximum load time shall be 60 s.

10.6.12 Monitor the average potato temperature during cooking. When the average potato temperature reaches $195 \pm 2^\circ\text{F}$ ($91 \pm 1^\circ\text{C}$) shut the oven off immediately, and record the amount of water and energy consumed and the elapsed cook time to the nearest 0.1 min. (Cook time is the time from when the oven door is closed until the oven is shut off.)

NOTE 11—For gas combination ovens, the “electric energy rate” during the heavy load test will be reported separately from the gas “cooking energy rate.” The two values are reported separately so that the respective fuel prices may be applied to estimate energy costs.

10.6.13 Confirm the cooked potato temperature by measuring and recording the temperature of five randomly selected potatoes for each pan. Ensure that each quadrant in each pan is represented. Temperature shall be measured immediately after cooking is terminated. The last temperature taken shall be no more than 3 min after cooking is terminated. The average temperature (including monitored and spot-checked potatoes) must be $195 \pm 2^\circ\text{F}$ ($91 \pm 1^\circ\text{C}$). If the temperature does not fall in this range, the test must be repeated with an adjusted cook time.

10.6.14 Remove the thermocouples from the potatoes, and quickly remove all of the pans from the oven prior to weighing them. Record the final weight of each pan of potatoes within the maximum allowed time as measured from the time at which the oven was shut off. Calculate and record the final weight of the potatoes in each pan. Record all weights to the nearest 0.01 lb (0.005 kg). Once the pans have been removed from the oven, close the door and restart the oven.

10.6.15 Remove the potato loads, and unless this was the final run (Run No. 3), start timing the 10-min stabilization period before the next run. Return to step 10.6.7.

10.6.16 In accordance with 11.8, calculate and report cooking energy efficiency, cooking energy rate, production rate, water consumption, and average condensate temperature. After performing the necessary test replicates, report results as the average of the replications.

10.7 Convection Mode Cooking Energy Efficiency and Production Capacity:

10.7.1 The convection mode cooking energy efficiency test shall be repeated a minimum of three times. Additional test runs may be necessary to obtain the required precision for the reported test results (Annex A1). The reported values of cooking energy efficiency, production capacity, and cooking energy rate shall be the average of the replications (runs).

10.7.2 Determine the number of pans to be used for the convection mode cooking-energy efficiency test. For half-size (Capacity A) and full-size (Capacity B) combination ovens, shallow steam pans as specified in 7.5 shall be used for the convection mode cooking-energy efficiency test. The heavy load is equivalent to the manufacturer’s stated capacity of standard 12 by 20 by 2 tests. For two-thirds size (Capacity C) combination ovens, the ½-in. (325 by 530 by 65 mm) hotel pans. Shallow steam pans as steam pans specified in 7.57.6 shall be used for the convection mode cooking-energy efficiency tests.

10.7.3 Number each shallow steam pan and record the weight of each (empty) shallow steam pan.

10.7.4 Prepare a minimum number of loads for three test runs. Place 15 russet potatoes (7.3) (three rows of five potatoes per row) on each pan (Fig. 3). The weight of the potatoes on these pans shall be 7.25 ± 0.30 lb (3.3 ± 0.14 kg). For two-thirds size (Capacity C) combination ovens, load each



FIG. 3 Russet Potato Load

steam pan with 10 russet potatoes. The weight of these potatoes shall be 4.8 ± 0.2 lb (2.2 ± 0.1 kg). Record the weight of the potatoes on each pan. For each test run, record the total weight of all of the potatoes as the initial potato weight. Record all weights to the nearest 0.01 lb (0.005 kg).

NOTE 12—If the weight of the potatoes on a pan is outside the 7.25 ± 0.30 -lb (3.3 ± 0.14 -kg) weight range specified above, substitute smaller or larger potatoes, as necessary, until the weight of the potatoes on each pan is within one of the appropriate required weight ranges.

10.7.5 Once the pans of potatoes have been prepared, mark selected potatoes to be monitored for temperature. Randomly select 20 potatoes from the potato load for temperature monitoring, such that the monitored potatoes are located on each level of the combi-combination oven, from top to bottom.

NOTE 13—For a given pan, monitor potatoes at different combinations of locations for each test run. For example, if for Run No. 1, potatoes on Pan No. 5 are monitored at Location Nos. 5, 17, and 29, potatoes on this pan are not to be monitored at this same combination of locations during subsequent test runs.

10.7.6 If the Type 3 combination oven has a removable rack trolley, the rack trolley shall remain outside the oven until loading takes place (10.7.10). A manufacturer-supplied bridge or supplemental rack trolley may be required. Refer to the combination oven operator's manual.

10.7.7 Shortly before each test run, place the bead of a bare junction thermocouple into the center of the marked potatoes being cooked. The thermocouple shall be inserted from the long end of the oblong-shaped potato, into the potato's center. Secure each thermocouple lead wire in such a manner that its junction will remain at the center of the potato throughout the cooking period. Ensure that the temperature readout device displays the average temperature of all of the monitored potatoes. The temperature of the potatoes at the start of each test shall be $75 \pm 5^\circ\text{F}$ ($21 \pm 2.8^\circ\text{C}$).

10.7.8 Set the oven to operate in convection ~~more mode~~ at 350°F (177°C) (dry heat only, fan at maximum speed) and preheat the oven to 350°F (177°C). Allow the oven to idle at 350°F (177°C) for 1 h prior to the start of the first test run. Once this time period has elapsed, wait for the oven elements or burners to cycle one additional time before starting the test run to ensure that the oven cavity air temperature is at 350°F (177°C).

10.7.9 When the oven ready light or heat on light goes off, begin recording the oven energy consumption. Open the oven door immediately, and allow it to remain open for the entire loading period, as indicated in ~~10.7.9~~ 10.7.10. Do not close the door, even if the pan loading is completed in less than the allotted time. At the end of the load period, close the oven door and record the initial average potato temperature to the nearest 0.1°F (0.06°C). Commence monitoring oven energy and water consumption, elapsed time and potato temperature. Record the time as the beginning of the cooking period.

10.7.10 The total loading time (the time from opening the first compartment to closing and starting the last compartment) shall be the total of 5 s per pan for each load used (for example, the total loading time for a heavy load test of a six-pan capacity, full-size combi-combination oven would be: 5 s/pan \times 12 pans = 60 s). For Type 3 combination ovens with a removable rack trolley, the maximum load time shall be 60 s.

10.7.11 Monitor the average potato temperature during cooking. When it reaches 205°F (96°C), shut the oven off immediately, and record the amount of energy consumed and elapsed cook time to the nearest 0.1 min. (Cook time is the time from when the oven door is closed until the oven is shut off.) Remove the thermocouples from the potatoes, and quickly remove all of the pans from the oven prior to weighing them. Record the final weight of each pan of potatoes within the maximum allowed time (5 min) as measured from the time at which the oven was shut off. Calculate and record the final weight of the potatoes in each pan. Record the sum of these five weights as the final potato weight. Record all weights to the nearest 0.01 lb (0.005 kg). Calculate the oven's cooking energy efficiency, production rate, and cooking energy rate (see 11.9). Once the pans have been removed from the oven, close the door and restart the oven. ~~Start timing the 10-minute stabilization period before the next test run.~~

10.7.12 Perform Run Nos. 2 and 3 by repeating the steps given in 10.7.4 – ~~10.7.10~~ 10.7.11. Follow the procedure in Annex A1 to determine whether more than three test runs are required. Report the results for the cooking energy efficiency, production rate, cooking energy rate, and cook time as described in Annex A1.

10.8 Combi Mode Cooking Uniformity:

NOTE 14—The intent of this procedure is to demonstrate potential pan-to-pan temperature variability in the cooking compartment using ice as a simulated food product. Ice loads are representative of food loads, while allowing for more consistent temperature measurement. ~~To evaluate the cooking performance of a combination oven in combi mode, see Test Method F1639.~~

10.8.1 The cooking uniformity test must be repeated three times. The reported final pan temperatures shall be the average of the replications (runs).

10.8.2 ~~The number of ice loads required depends on the combi capacity. The ice load is the manufacturer's stated capacity of 12 by 20 by 2½-in. (325 by 530 by 65-mm) hotel pans.~~ Prepare enough ice loads for three runs.

10.8.3 ~~The~~ For half-size (Capacity A) and full-size (Capacity B) combination ovens, the solid hotel pans shall be as specified in ~~6.11~~ 6.12. For two-thirds size (Capacity C) combination ovens, the solid hotel pans shall be as specified in 6.13.

10.8.4 Number each pan and record the weight of each of the (dry) pans.

10.8.5 ~~Fill the pans with enough water such that there will be~~ For half-size (Capacity A) and full-size (Capacity B) combination ovens, fill the pans with 8.0 ± 0.2 lb (3.6 ± 0.1 kg) of ice after freezing (some water will evaporate during freezing, especially if hotel pan lids are not used). Accurate measurement of the weight of the pans plus the water prior to freezing is not required since