



Designation: ~~D6973 – 08~~^{ε1} D6973 – 14

Standard Test Method for Indicating Wear Characteristics of Petroleum Hydraulic Fluids in a High Pressure Constant Volume Vane Pump¹

This standard is issued under the fixed designation D6973; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

^{ε1} NOTE—Changes were made to Fig. 1 and Note 4, and Note 7 was added editorially in May 2008.

1. Scope-~~Scope~~*

1.1 This test method covers a constant volume high-pressure vane pump test procedure for indicating the wear characteristics of petroleum hydraulic fluids. See **Annex A1** for recommended testing conditions for water-based synthetic fluids.

1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards*:²

E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

2.2 *ISO Standards*:³

ISO 4021 Hydraulic Fluid Power—Particulate Contamination Analysis—Extraction of Fluid Samples from Lines of an Operating System

ISO 4406 Hydraulic Fluid Power—Fluids—Method for Coding the Level of Contamination by Solids Particles

ISO 7745 Hydraulic Fluid Power—Fire-Resistant (FR) Fluids—Guidelines for Use

ISO 11171 Hydraulic Fluid Power—Calibration of Automatic Particle Counters for Liquids

ISO 11500 Hydraulic Fluid Power—Determination of Particulate Contamination by Automatic Counting Using the Light Extinction Principle

2.3 *Other Documents*:

SAE 100R13–20 Hydraulic Hose Specification⁴

ANSI(NFPA) T2.13.1 R3-1998 Recommended Practice—Hydraulic Fluid Power—Use of Fire-Resistant Fluids in Industrial Systems⁵

3. Terminology

3.1 *Definitions of Terms Specific to This Standard*:

3.1.1 *flushing, v*—the process of cleaning the test system before testing to prevent cross-contamination.

4. Summary of Test Method

4.1 Hydraulic fluid in the amount of ~~190 ± 4 L (50 ± 1 gal)~~ **190 L ± 4 L (50 gal ± 1 gal)** is circulated through a rotary vane pump system for ~~50 h~~ **50 h** at a pump speed of ~~2400~~ **2400 r/min** ± 20 r/min and a pump outlet pressure of ~~20.7 ± 0.2 MPa (3000~~

¹ This test method is under the jurisdiction of ASTM Committee **D02** on Petroleum Products—~~Products, Liquid Fuels,~~ and Lubricants and is the direct responsibility of Subcommittee **D02.N0.07** on Lubricating Properties.

Current edition approved Feb. 1, 2008 July 1, 2014. Published March 2008 August 2014. Originally approved in 2003. Last previous edition approved in 2005 2008 as ~~D6973D6973 – 08~~^{ε1}–05. DOI: ~~10.1520/D6973-08E01~~ 10.1520/D6973-14.


² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036.

⁴ Available from Society of Automotive Engineers (SAE), 400 Commonwealth Dr., Warrendale, PA 15096-0001.

⁵ Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036.

*A Summary of Changes section appears at the end of this standard

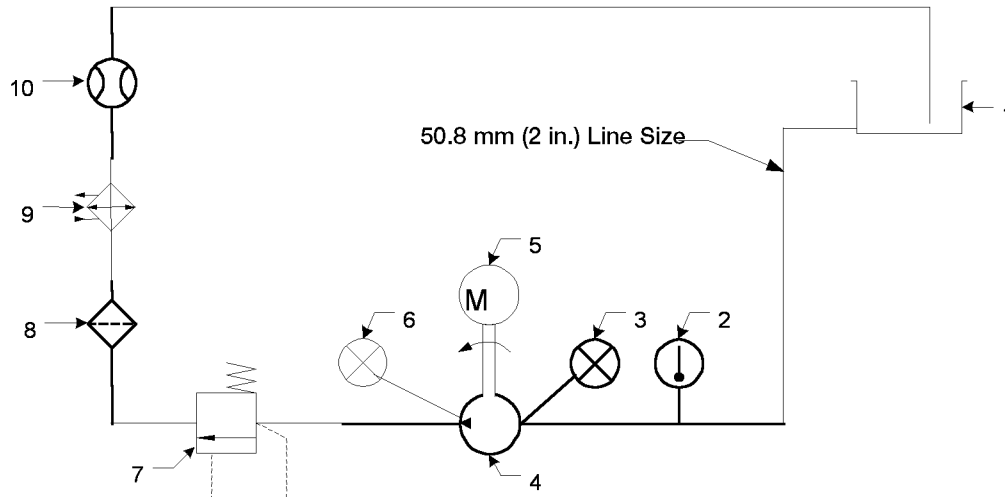

Description of Components:

- 1 Reservoir, 190 L (50 gal) of oil; elevated above pump centerline to provide gravity feed
- 2 Temperature gage or thermocouple
- 3 Inlet pressure gage
- 4 Pump: 35VQ25A-11*20 (Cartridge kit P/N 4998040-002)
- 5 Electric motor, 93 kW (125 hp)
- 6 Outlet pressure gage
- 7 Pressure relief valve
- 8 Filter
- 9 Cooler
- 10 Flowmeter

NOTE 1—See Eaton Overhaul Manual I-3144-S (Appendix B) (available from any Eaton distributor).

FIG. 1 System Schematic

± 20 psig) $20.7 \text{ MPa} \pm 0.2 \text{ MPa}$ (3000 psig ± 20 psig). Fluid temperature at the pump inlet is $95 \pm 5 \text{ }^\circ\text{C}$ ($203 \pm 5 \text{ }^\circ\text{F}$). An ISO Grade 32 or 10W viscosity is required.

4.2 The mass of the cam ring and all ten vanes should be individually weighed before and after the test. The weight loss of the cam ring should be reported with the combined weight loss of all ten vanes. The intra-vanes (inserts) are not part of the required weight loss measurements and should be separately measured if desired. Other reported values are fluid cleanliness before and after the test, initial flow rate, and final flow rate.

4.3 Prior to installing the hydraulic test fluid into the rig, a stand flush is required to remove any contaminants. A minimum quantity of $190 \pm 4 \text{ L}$ ($50 \pm 1 \text{ gal}$) of fluid (see Note 1) made of the same chemical formulation as the test fluid, is required for the stand flush. Therefore the total quantity of oil required for the test is 380 L (100 gal).

5. Significance and Use

5.1 This test method is an indicator of the wear characteristics of petroleum hydraulic fluids operating in a constant volume vane pump. Excessive wear in vane pumps could lead to malfunction of hydraulic systems in critical industrial or mobile hydraulic applications.

6. Apparatus

6.1 The basic system consists of the following (see Fig. 1):

6.1.1 *Electric Motor*, or other suitable drive, capable of a rotational speed of 2400 rpm with 93 kW (125 hp) as suggested minimum power requirement (see Fig. 1, Item 5).

6.1.2 *Test Stand Base*, with appropriate, rigid mounting for the motor, pump, reservoir, and other components.

6.1.3 *Rotary Intra-Vane Pump*, replaceable cartridge type,^{6,7} Vickers 35VQ25A-11*20 (Cartridge Kit P/N 4998040-002)⁸ rated at 81 cm³/rev (4.98 in.³/rev) flow at 1200 ~~rev/min~~r/min. A protective shield around the pump is recommended.

6.1.3.1 There are to be no modifications to the pump housing.

6.1.4 *Reservoir*, equipped with a baffle and lid, all of stainless steel construction.

6.1.4.1 Additional fluid ports may be added to the reservoir as required by the user to assist in measuring fluid level, reservoir temperature, and so forth.

6.1.4.2 If the reservoir is positioned so that the contents cannot be visually checked for air entrainment by removing the lid, a fluid-sight glass viewing port may be located in the side of the reservoir.

6.1.5 *Pump Outlet Pressure Control Valve*, with either manual or remote control (see Fig. 1, Item 7).

6.1.6 *Temperature-control Device*, suitable for controlling coolant flow to the heat exchanger to maintain test fluid at the specified temperature (see Fig. 1, Item 9).

6.1.7 *Temperature Indicator*, (see Fig. 1, Item 2) shall have a minimum accuracy of $\pm 1^{\circ}\text{C} \pm 1^{\circ}\text{C}$ and shall have an appropriate sensor to monitor pump inlet temperature.

6.1.7.1 To prevent a flow disturbance near the pump inlet port, the temperature probe shall have a diameter of not more than 6 mm (0.25 in.) and positioned not less than 30 cm (12 in.) from the pump inlet port.

6.1.7.2 The test fluid temperature probe shall be positioned greater than 30 cm (12 in.) from the pump inlet cover (see Fig. 2). The fluid temperature probe shall be inserted into the midpoint of flow.

6.1.8 *Heat-Exchanger*, (see Fig. 1, Item 9). The heat exchanger should be of adequate size and design to remove the excess heat from the test system when utilizing the available coolant supply.

6.1.9 *Outlet Pressure Indicator*, (see Fig. 1, Item 6), to measure pump discharge pressure, and shall have an accuracy of at least ~~$\pm 1 \text{ bar} \pm 100 \text{ kPa}$~~ ($\pm 15 \text{ psi}$).

6.1.10 *Inlet Pressure Indicator*, (see Fig. 1, Item 3), to measure pump inlet pressure, and shall have an accuracy of at least $\pm 7 \text{ kPa}$ ($\pm 1 \text{ psi}$).

6.1.11 *Filter Unit*, (see Fig. 1, Item 8), to limit system debris from causing wear to the test pump. The filter performance should be $\beta_3 \geq 100$.

6.1.11.1 The filter housing shall be installed with dual pressure gages (see Fig. 1, Item 13) or a differential pressure transducer to monitor pressure across the filter to warn of impending collapse of the element.

6.1.11.2 If dual pressure gages are used to monitor filter pressure, the rated collapse pressure of the filter element should be known.

6.1.12 *Flow-Measuring Device*, (see Fig. 1, Item 12), with an accuracy of at least $\pm 1 \text{ L/min}$ ($\pm 0.25 \text{ gpm}$).

6.1.12.1 It is suggested that the test circuit be equipped with some automated shutdown capabilities for safety reasons. Safety relays could be any of the following: low-level, high pressure, high temperature, and low flow safety switches incorporated into the system.

6.1.12.2 A check should be made to ensure that the flush and test fluid are compatible with seals or any other materials in the system.

6.1.13 *Flexible Motor Coupling*, to connect the motor drive and the pump.

6.1.14 *Fluid Sampling Port*, in accordance with ISO 4021.

6.2 The various components of the test system shall be placed in the system as indicated in Fig. 1.

6.2.1 The test system shall be arranged and provided with necessary drain valves so that complete draining is possible with no fluid trap areas.

6.2.2 Good hydraulics piping practices should be used when constructing the test system to avoid air entrainment points and flow restrictions.

6.2.3 The pump should be mounted so that its internal surfaces can easily be inspected and cleaned, alignment can be checked, and the operator has comfortable access when torquing the head.

6.2.4 A pressure transducer, to measure inlet pressure, shall be placed within 30.5 cm (12 in.) of the opening of the pump cover.

6.2.5 The inlet pressure of the pump shall be ~~$13.8 \pm 7 \text{ kPa}$~~ (~~$2 \text{ psig} \pm 1 \text{ psig}$~~) ($2 \text{ psig} \pm 1 \text{ psig}$) once the break-in procedure is complete and test conditions have been met (see 12.2).

NOTE 1—See Annex A1 for recommended testing conditions for water-based synthetic fluids.


6.2.6 The reservoir should be mounted so that it can be cleaned and filled with ease and the contents may be readily inspected by removal of the reservoir lid or inspection cover.

⁶ The replaceable cartridge consists of the inlet support plate, outlet support plate, flex side plates, seal pack, rotor, cam ring, intra-vane, and vanes.

⁷ The individual cartridge parts can be purchased separately, if desired. The Eaton part numbers for these items are cartridge screws: P/N 410609, alignment pins: P/N 418108, inlet support plate: P/N 430806, outlet support plate: P/N 412003, flex side plate kit: P/N 923953, seal pack: P/N 433766, rotor: P/N 262154, cam ring: P/N 4999594-001, vane kit (includes ten intra-vanes and ten vanes): 922700.

⁸ Available from any Eaton distributor.

The sole source of supply of the apparatus known to the committee at this time is Eaton, 14615 Lone Oak Rd., Eden Prairie, MN 55344, <http://www.eaton.com>. If you are aware of alternative suppliers, please provide this information to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee,¹ which you may attend.

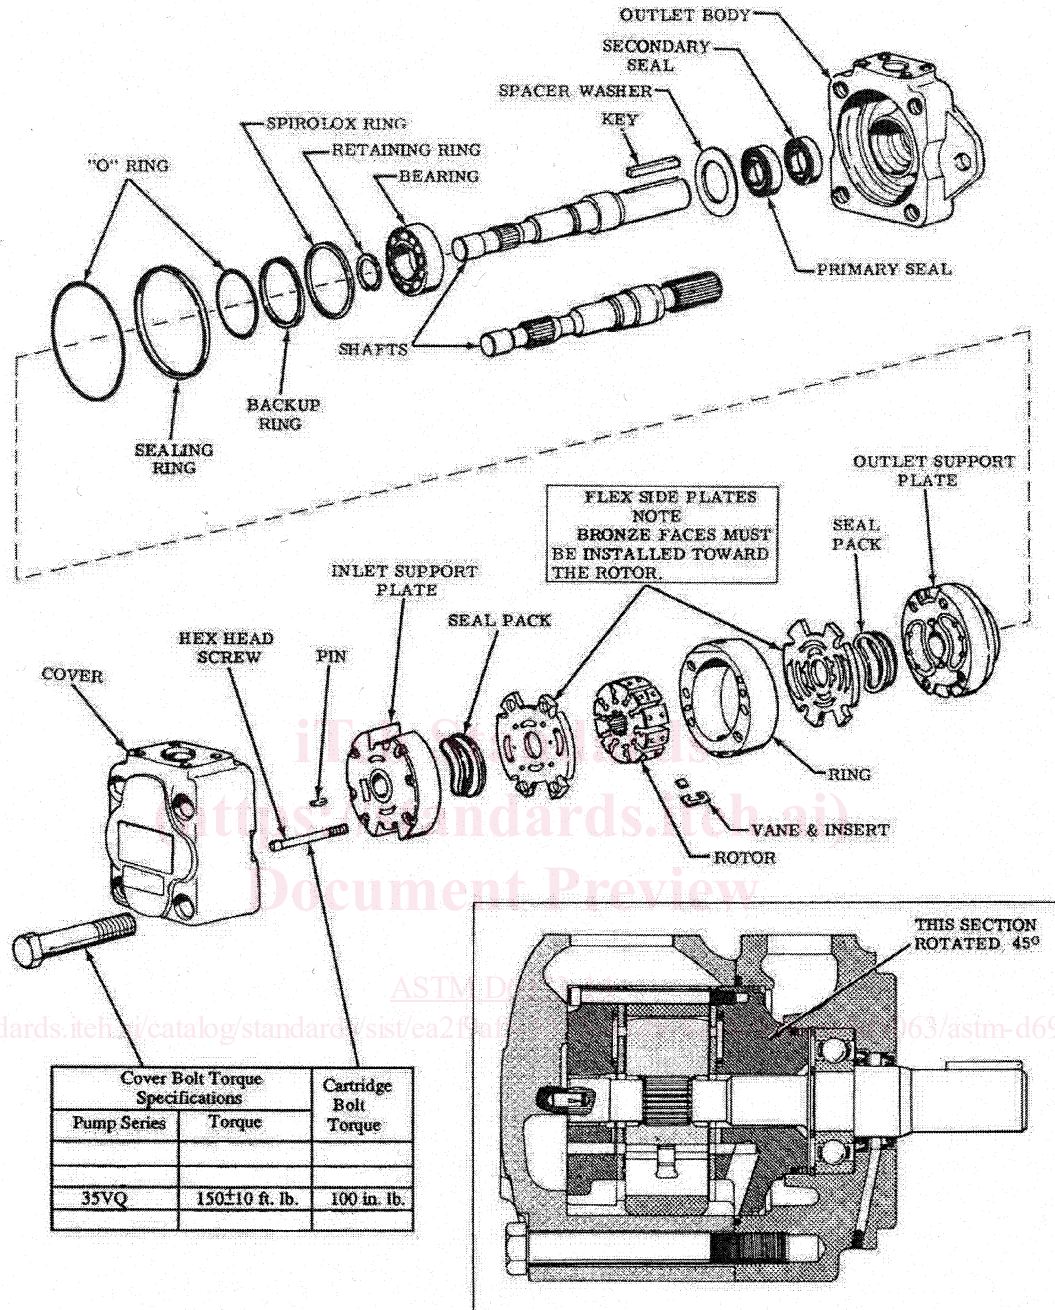

NOTE 1—See Eaton Overhaul Manual I-3144-S (Appendix C) (available from any Eaton distributor).

FIG. 2 Pump Components

6.2.7 The inlet line (from the reservoir to the pump intake) shall have an internal diameter of at least 5.08 cm (2 in.) and shall have a straight run of at least 61 cm (24 in.) to the pump inlet port.

NOTE 2—Some users prefer to use a radius bend at the reservoir outlet instead of an elbow. If used, the straight run described in 6.2.7, shall still be measured between the end of the bend and the pump inlet port.

6.2.8 The high pressure discharge line (from the pump to the pressure control valve) shall have a minimum inside diameter of ± 31.75 mm ($1\frac{1}{4}$ in.) with a maximum allowable working pressure rating greater than 207 Bar (20.7 MPa) (3000 psi). A seamless steel pipe size and schedule with a 60 mm outside diameter and 11.1 mm wall thickness (2 in. double extra strong pipe-XXS) or equivalent high-pressure hose (SAE 100R13-20) are recommended for the discharge line.

6.2.9 The fluid return line and fittings (from the pressure control valve to the filter, flowmeter, heat exchanger, and reservoir) should have a minimum inside diameter of 2.54 cm (1 in.). A seamless steel pipe size of with 33 mm outside diameter and 3.4 mm wall thickness (1 in. Schedule 40) is recommended for the fluid return line.