



## Standard Specification for Welded Joints for Shipboard Piping Systems<sup>1</sup>

This standard is issued under the fixed designation F722; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This specification covers typical details of welded joints commonly used in shipboard piping systems. These joints and other joints may be used provided the welding procedures used have been qualified in accordance with the applicable regulatory rules and regulations.

1.2 The values stated in inch-pound units are to be regarded as ~~the standard~~ standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

### 2. Referenced Documents

#### 2.1 Federal Standards:

Code of Federal Regulations Title ~~46,46~~ Shipping, Parts 30 to 40<sup>2</sup>

Code of Federal Regulations Title ~~46,46~~ Shipping, Parts 41 to 69<sup>2</sup>

Code of Federal Regulations Title ~~46,46~~ Shipping, Parts 140 to 149<sup>2</sup>

Rules for Building and Classing Steel Vessels<sup>3</sup>

### 3. Application, Service, Limitations, and List of Weld Joint Details

3.1 Details of welded joints, including application, service, and limitation notes, are provided in the appropriate figures, as follows:

#### 3.1.1 *Butt-Welded Joints for Pipes, Valves, Fittings, and Flanges:*

Fig. 1 Butt Joint, Square

Fig. 2 Butt Joint, V-Grooved

Fig. 3 Butt Joint, V-Grooved, Welded Both Sides

Fig. 4 Butt Joint, Double V-Grooved, Welded Both Sides

Fig. 5 Butt Joint, Compound Bevel V-Grooved, Welded Both Sides

Fig. 6 Butt Joint, V-Grooved, Miter Type

Fig. 7 Butt Joint, V-Grooved, Welded with Bevel End-Type Backing Ring

Fig. 8 Butt Joint, Compound Bevel V-Grooved, Welded with Bevel End-Type Backing Ring

Fig. 9 Butt Joint, V-Grooved Welded with Bevel End Lug-Type Backing Ring

Fig. 10 Butt Joint, V-Grooved, Welded with Square End-Type Backing Ring

Fig. 11 Butt Joint, V-Grooved, Welded with Consumable Insert Ring

Fig. 12 Butt Joint, Compound Bevel V-Grooved, Welded with Consumable Insert Ring

Fig. 13 Butt Joint, U-Grooved, Welded with Consumable Insert Ring

Fig. 14 Butt Joint, V-Grooved, Welded with Consumable Insert Ring

Fig. 15 Butt Joint, Socket Weld to Socket Weld Valve, Fitting or Flange Welded on Pipe Nipple

Fig. 16 Butt Joint, Transition between Unequal Inside and Outside Diameter Components

#### 3.1.2 *Fillet Welded Joints for Valves, Fittings, and Flanges:*

Fig. 17 Fillet Welded Sleeve-Type Pipe Coupling


Fig. 18 Fillet Welded Socket Weld Fitting or Valve

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.11 on Machinery and Piping Systems.

Current edition approved Nov. 1, 2008; Nov. 1, 2014. Published December 2008; November 2014. Originally approved in 1981. Last previous edition approved in 2004 (2008) as F722 – 82 (2004) (2008). DOI: 10.1520/F0722-82R08; 10.1520/F0722-82R14.


<sup>2</sup> Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401-20401, <http://www.access.gpo.gov>.

<sup>3</sup> Available from American Bureau of Shipping (ABS), ABS Plaza, 16855 Northchase Dr., Houston, TX 77060-77060, <http://www.eagle.org>.

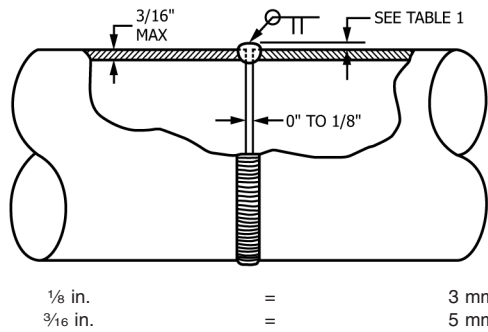


Application—Class II piping  
 Systems or Service—For services such as gravity drains (including plumbing), vents, and overflows.  
 Remarks—1. Root of weld need not be ground.

FIG. 1 Butt Joint, Square

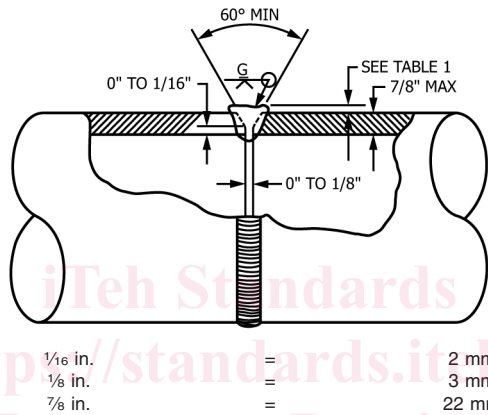

Application—Class II piping  
 System or Service—All provided root of weld is visually inspected where possible to ensure complete weld penetration.  
 Remarks—1. For services such as vents, overflows, and gravity drains (including plumbing) the root of the weld need not be ground.


FIG. 2 Butt Joint, V-Grooved

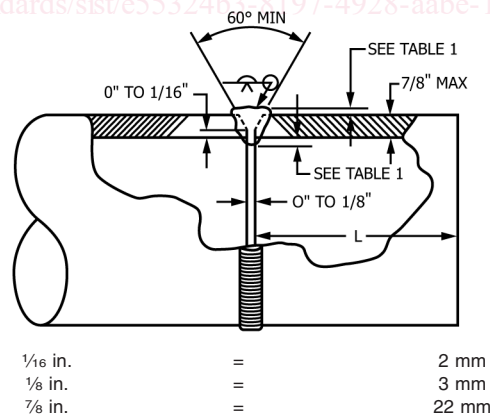

Application—Class I and II piping above 2-in. NPS  
 System or Service—All  
 Remarks—1. Internal weld shall be made first and ground, chipped, or cleaned by some other means to assure sound welds.  
 2. The "L" dimension should be held to a minimum to facilitate welding and inspection on the inside surface of the pipe.

FIG. 3 Butt Joint, V-Grooved, Welded Both Sides


- Fig. 19 Fillet Welded Socket Weld-Flange
- Fig. 20 Double Fillet Welded Slip-On Flange (Forged)
- Fig. 21 Double Fillet Welded Slip-On Flange (Plate Type)
- Fig. 22 Fillet Welded Slip-On Flange (Plate Type), Single Bevel

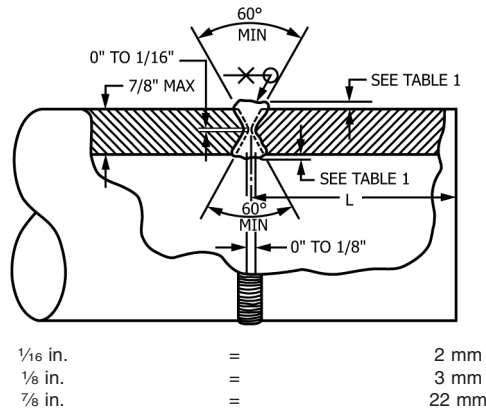

Application—Class I and II piping above 2-in. NPS  
System or Service—All

Remarks—1. Internal weld shall be made first and ground, chipped, or cleaned by some other means to assure sound welds.  
2. The “L” dimension should be held to a minimum to facilitate welding and inspection on the inside surface of the pipe.

**FIG. 4 Butt Joint, Double V-Grooved, Welded Both Sides**

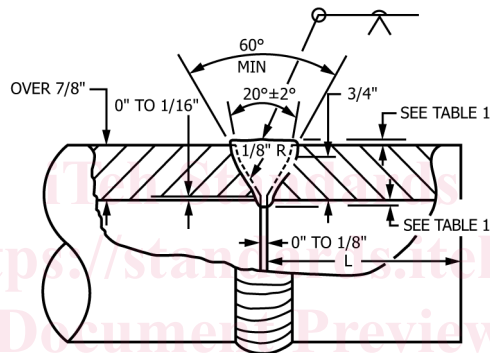

Application—Class I and II piping above 2-in. NPS  
Systems or Service—All

Remarks—1. Internal weld shall be made first and ground, chipped, or cleaned by some other means to assure sound welds.  
2. The “L” dimension should be held to a minimum to facilitate welding and inspection on the inside surface of the pipe.

**FIG. 5 Butt Joint, Compound Bevel V-Grooved, Welded Both Sides**

3.1.3 Fabricated Joints:


- Fig. 23 Fillet Welded Internal Root Connection
- Fig. 24 Fillet Welded External Root Connection
- Fig. 25 Fillet Reinforced External Root Connection Single Bevel
- Fig. 26 Fillet Reinforced External Root Connection, Single Bevel, Welded Both Sides
- Fig. 27 Fillet Reinforced External Root Connection, Single Bevel, Welded with Square End Backing Ring
- Fig. 28 Fillet Reinforced Internal Root Connection, Single Bevel, Welded with Square End Backing Ring

3.1.4 Outlet and Boss Connections:

- Fig. 29 Fillet Reinforced Boss Connection Without Pilot, Single Bevel
- Fig. 30 Fillet Reinforced Boss Connection with Pilot, Single Bevel
- Fig. 31 Fillet Reinforced Boss Connection (Couplet) with Integral Backing Ring
- Fig. 32 Fillet Reinforced External Root Connection, Single Bevel with Integrally Reinforced Outlet
- Fig. 33 Fillet Reinforced External Root Connection Welded Both Sides, Single Bevel with Integrally Reinforced Outlet

**4. Piping Classifications and Butt Weld Reinforcements**


4.1 Piping classifications in accordance with Subpart 56.04 of USCG Regulations apply to this specification. For definitions of ABS Group I and II Pipe Connections, see ABS Rules, Section 30, Paragraph 30.13.

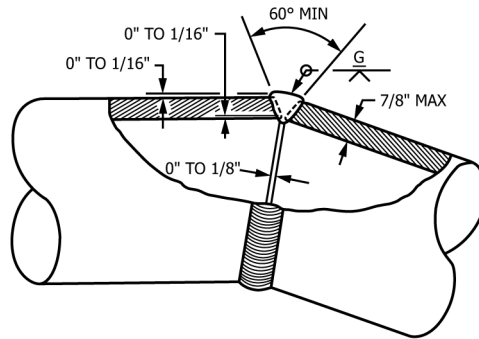

1/16 in.	=	2 mm
1/8 in.	=	3 mm
7/8 in.	=	22 mm

Application—Class II piping where use will not cause objectionable pressure drop or turbulence.  
 System or Service—All provided root of weld is visually inspected where possible to ensure complete weld penetration.  
 Remarks—1. For services such as vents, overflows, and gravity drains (including plumbing), the root of the weld need not be ground.  
 2. Miter segments shall be designed in accordance with ANSI B31.1, paragraph 104.33, and 46 CFR 56.07-10(f).

FIG. 6 Butt Joint, V-Grooved, Miter Type

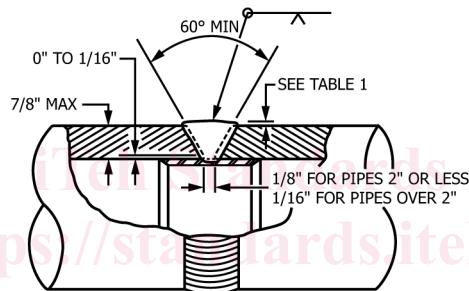

in.	1/16	1/8	3/16	7/8
mm	2	3	5	22


Application—Class I and II piping  
 System or Service—All, except as noted in remarks  
 Remarks—1. Backing ring may be tack-welded in place to facilitate fabrication.  
 2. When used in the following services, backing rings shall be removed.  
 (A) Lube oil service discharge piping from the lube oil pumps to the reduction gears, HP and LP turbines, and lube oil gravity tank.  
 (B) Superheated steam outlet piping from the main boilers to the HP and LP turbines and turbo generators and desuperheated steam from the main boilers to turbine driven main feed pumps.  
 (C) Central hydraulic systems.

FIG. 7 Butt Joint, V-Grooved, Welded with Bevel End-Type Backing Ring

4.2 Maximum thickness of butt weld reinforcements in accordance with Subpart 56.70, Table 56.70-15, of USCG Regulations are listed in Table 1.

5. Keywords


5.1 backing ring pipe welds; boss connections; flange welds; miter joint weld; pipe welds; root connections; sleeve pipe welds; socket welds; welded joints

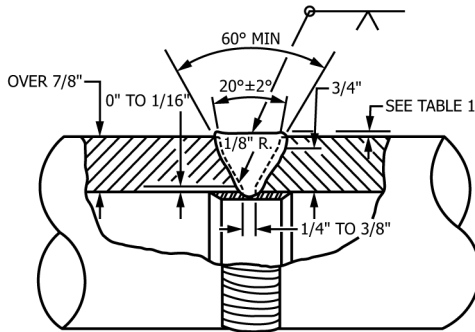

in.	1/16	1/8	1/4	3/8	1/2	3/4	7/8
mm	2	3	6	10	13	19	22

Application—Class I and II piping  
 System or Service—All, except as noted in remarks  
 Remarks—1. Backing ring may be tack-welded in place to facilitate fabrication.  
 2. When used in the following services, backing rings shall be removed.  
 (A) Lube oil service discharge piping from the lube oil pumps to the reduction gears, HP and LP turbines, and lube oil gravity tank.  
 (B) Superheated steam outlet piping from the main boilers to the HP and LP turbines and turbo generators and desuperheated steam from the main boilers to turbine driven main feed pumps.  
 (C) Central hydraulic systems.


**FIG. 8 Butt Joint, Compound Bevel V-Grooved, Welded with Bevel End-Type Backing Ring**

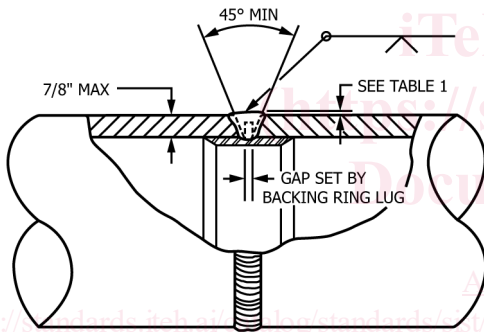

7/8 in. = 22 mm

Application—Class I and II piping  
 System or Service—All, except as noted in remarks  
 Remarks—1. Backing ring may be tack-welded in place to facilitate fabrication.  
 2. When used in the following services, backing rings shall be removed.  
 (A) Lube oil service discharge piping from the lube oil pumps to the reduction gears, HP and LP turbines, and lube oil gravity tank.  
 (B) Superheated steam outlet piping from the main boilers to the HP and LP turbines and turbo generators and desuperheated steam from the main boilers to turbine driven main feed pumps.  
 (C) Central hydraulic systems.


**FIG. 9 Butt Joint, V-Grooved Welded with Bevel End Lug-Type Backing Ring**

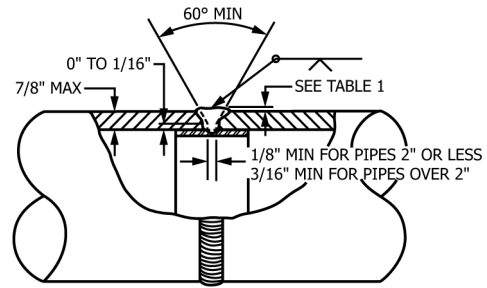

in.	1/16	1/8	3/16	1/4
mm	2	3	5	7

Application—Class I and II piping  
 Systems or Service—All  
 Remarks—1. After welding, backing ring shall be machined flush with inside diameter of pipe or fitting.


**FIG. 10 Butt Joint, V-Grooved, Welded with Square End-Type Backing Ring**

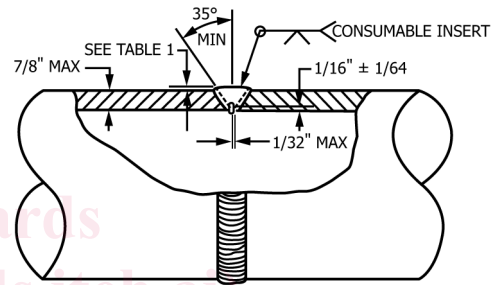

in.	1/64	1/32	1/16	7/8
mm	0.4	1	2	22

Application—Class I and II piping  
 System or Service—All  
 Remarks—1. Internal misalignment of pipes shall not exceed 1/16 in. (2 mm).  
 2. Consumable insert ring shall be centered before welding.


**FIG. 11 Butt Joint, V-Grooved, Welded with Consumable Insert Ring**

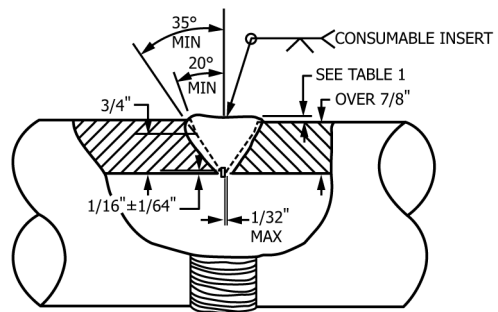

in.	1/64	1/32	1/16	3/4	7/8
mm	0.4	1	2	19	22

Application—Class I and II piping  
 System or Service—All  
 Remarks—1. Internal misalignment of pipes shall not exceed 1/16 in. (2 mm).  
 2. Consumable insert ring shall be centered before welding.


**FIG. 12 Butt Joint, Compound Bevel V-Grooved, Welded with Consumable Insert Ring**

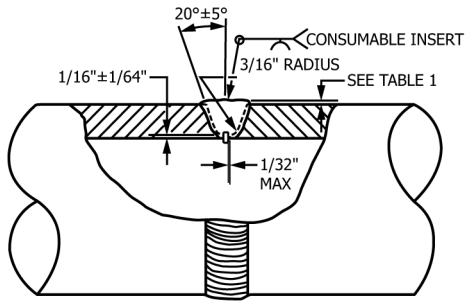

in.	1/64	1/32	1/16	3/16
mm	0.4	1	2	5

Application—Class I and II Piping  
 System or Service—All  
 Remarks—1. Internal misalignment of pipes shall not exceed 1/16 in. (2 mm).  
 2. Consumable insert ring shall be centered before welding.


**FIG. 13 Butt Joint, U-Grooved, Welded with Consumable Insert Ring**

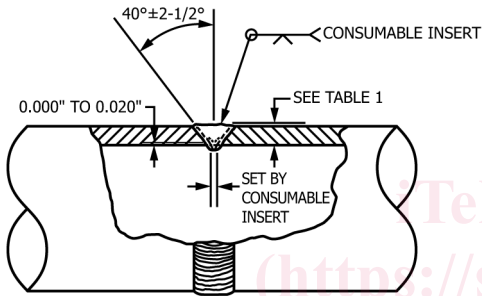

0.020 in. = 0.51 mm.

Application—Class I and II piping  
 System or Service—All  
 Remarks—1. Internal misalignment of pipes shall not exceed 1/32 in. (1 mm).  
 2. Consumable insert ring shall be centered before welding.




**FIG. 14 Butt Joint, V-Grooved, Welded with Consumable Insert Ring**

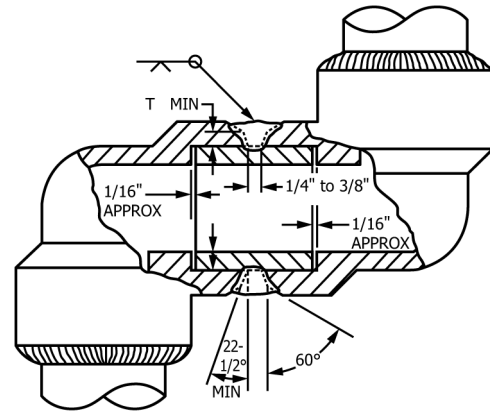

1/16 in.	=	2 mm
1/4 in.	=	6 mm
3/8 in.	=	10 mm

Application—Fittings: See Fig. 18. Flanges: See Fig. 19.  
 System or Service—See Fig. 18 and Fig. 19.  
 Remarks—1. Size of weld shall be equal to or greater than "T."  
 2. For Class I piping, depth of insertion of the pipe nipple into the fitting shall not be less than 3/8 in. (10 mm).  
 3. Weld to be deposited in a minimum of two passes unless specifically approved otherwise in a special procedure qualification.

**FIG. 15 Butt Joint, Socket Weld to Socket Weld Valve, Fitting or Flange Welded on Pipe Nipple**

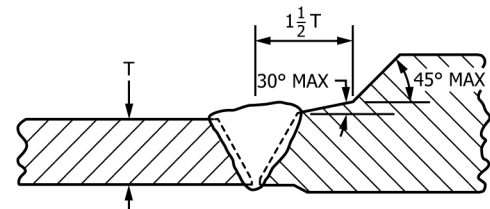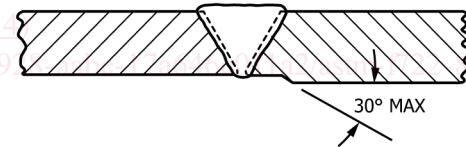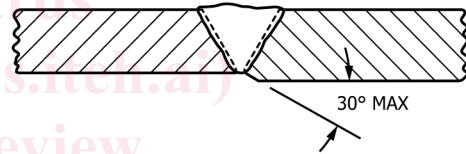

**FIG. 16 Butt Joint, Transition Between Unequal Inside and Outside Diameter Components**