



ISO/IEC 14763-3

Edition 3.0 2024-05

INTERNATIONAL STANDARD



Information technology – Implementation and operation of customer premises
cabling –
Part 3: Testing of optical fibre cabling

Document Preview

ISO/IEC 14763-3:2024

<https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024>





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2024 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

ITeH Standards
standards.iteh.ai
Document Preview

[ISO/IEC 14763-3:2024](https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024)

<https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024>

INTERNATIONAL STANDARD



Information technology – Implementation and operation of customer premises
cabling –
Part 3: Testing of optical fibre cabling

Document Preview

[ISO/IEC 14763-3:2024](https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024)

<https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-8857-3

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	7
INTRODUCTION.....	9
1 Scope.....	10
2 Normative references	10
3 Terms, definitions, abbreviated terms and symbols.....	11
3.1 Terms and definitions.....	11
3.2 Abbreviated terms.....	15
3.3 Symbols.....	16
4 Conformance.....	16
5 Test equipment.....	17
5.1 General requirements	17
5.2 Documentation.....	17
5.3 Apparatus	17
5.4 Light source and power meter	17
5.4.1 Light source.....	17
5.4.2 Power meter	19
5.5 OTDR	19
5.5.1 General	19
5.5.2 OTDR requirements.....	20
5.6 Test cord connectors	21
5.6.1 Connecting hardware at test interfaces.....	21
5.6.2 Connecting hardware attenuation requirements	21
5.6.3 Mechanical requirements for reference connectors	22
5.6.4 Reference adaptors at test interfaces	24
5.7 Test cord characteristics	24
5.7.1 General	24
5.7.2 LSPM launch test cord.....	24
5.7.3 LSPM tail test cord	25
5.7.4 LSPM substitution test cord	25
5.7.5 OTDR launch test cord	25
5.7.6 OTDR tail test cord	26
5.8 Visual inspection equipment.....	26
6 Testing	27
6.1 General.....	27
6.2 Reference planes.....	27
6.3 Wavelength of measurement.....	30
6.4 Direction of measurement	30
6.5 Protection of transmission and terminal equipment	30
6.6 Use of test equipment.....	30
6.7 Relevance of measurement.....	30
6.8 Visual inspection for cleanliness and cleaning of cabling interfaces	30
6.9 Testing of installed cabling.....	31
6.9.1 General	31
6.9.2 Attenuation of single fibre connector cabling – LSPM	31
6.9.3 Attenuation of multi-fibre connector cabling – LSPM	43
6.9.4 Attenuation of link and channel by means of OTDR testing.....	53

- 6.9.5 Propagation delay..... 57
- 6.9.6 Length 57
- 6.9.7 Optical fibre continuity 59
- 6.9.8 Cabling polarity 59
- 6.9.9 Optical fibre core size 59
- 7 Performance assessment of installed cabling components using OTDR..... 59
 - 7.1 General..... 59
 - 7.2 OTDR basis 59
 - 7.3 Fundamental parameters that define the operational capability of an OTDR..... 60
 - 7.3.1 Dynamic range 60
 - 7.3.2 Dynamic margin..... 61
 - 7.3.3 Pulse width 61
 - 7.3.4 Averaging time 61
 - 7.3.5 Dead zone 61
 - 7.3.6 Group index..... 61
 - 7.3.7 Measurement range 62
 - 7.3.8 Distance sampling 62
 - 7.3.9 Event threshold 62
 - 7.4 Bi-directional measurement..... 62
 - 7.5 Attenuation of optical fibre cable 63
 - 7.5.1 Test method 63
 - 7.5.2 Treatment of results..... 64
 - 7.6 Attenuation of local and remote test interfaces..... 64
 - 7.6.1 Test method 64
 - 7.6.2 Test system measurement uncertainties 65
 - 7.6.3 Treatment of results..... 65
 - 7.7 Attenuation of connecting hardware 66
 - 7.7.1 Test method 66
 - 7.7.2 Test system measurement uncertainties 67
 - 7.7.3 Treatment of results..... 67
 - 7.8 Return loss of connecting hardware 68
 - 7.8.1 General 68
 - 7.8.2 Test method 68
 - 7.8.3 Test system measurement uncertainties 69
 - 7.8.4 Treatment of results..... 69
 - 7.9 Optical fibre length..... 70
 - 7.9.1 Test method 70
 - 7.9.2 Measurement uncertainties 72
 - 7.9.3 Treatment of results..... 72
- 8 Test result documentation 73
- Annex A (normative) Test cord attenuation verification 74
 - A.1 General requirements 74
 - A.2 Attenuation (test and substitution test cord reference connections)..... 74
- Annex B (informative) Quality planning 76
 - B.1 General..... 76
 - B.2 Specification of cabling components 77
 - B.3 Treatment of non-compliant results 77

iteh Standards
 (https://standards.iteh.ai)
 Document Preview
 https://standards.iteh.ai/standards/iso-iec-14763-3-2024

Annex C (informative) Examples of calculations of channel and permanent link limits	78
C.1 Channel measurement	78
C.2 Permanent link measurement.....	79
Annex D (informative) Optional inspection of polished end face of test connectors.....	80
Annex E (normative) Cleaning of connectors.....	82
E.1 General.....	82
E.2 Cleaning procedure for LC multimode cabling interface.....	82
E.3 Cleaning procedure for the LC single-mode cabling interfaces	83
E.4 Cleaning procedure for the LC/APC single-mode cabling interfaces	84
E.5 Cleaning procedure for single-mode (SM) MPO APC cabling interface	85
Annex F (normative) MPO to MPO link or permanent link – enhanced-three-test-cord method LSPM	86
F.1 General.....	86
F.2 Requirements for the test system.....	86
F.3 Test method.....	86
F.4 Measurement uncertainties	88
F.5 Treatment of results	88
Bibliography.....	89
Figure 1 – Relationship of related International Standards	9
Figure 2 – OTDR characterization using a launch test cord and a tail test cord	21
Figure 3 – An example of test cord labelling and identification	24
Figure 4 – OTDR launch test cord and tail test cord schematic	25
Figure 5 – Normal illumination (left) and illumination with floodlight (right)	27
Figure 6 – Representative reference planes for channels, links, permanent links, E2E links, MPTL.....	28
Figure 7 – Test reference planes	29
Figure 8 – Fibre end face cleaning cycle	31
Figure 9 – Connection of LS to LTC to PM for reference setting	33
Figure 10 – Connection of LTC to TTC to verify attenuation of reference connectors	33
Figure 11 – Connections to link or permanent link for attenuation measurement	34
Figure 12 – Connection of LS to LTC to PM for reference setting	36
Figure 13 – Connection of LTC to TTC to verify attenuation of reference connectors	36
Figure 14 – Connections to E2E link for attenuation measurement.....	37
Figure 15 – Connection of LS to LTC to near end EQP cord to PM for reference setting	39
Figure 16 – Connections to channel test for attenuation measurement.....	39
Figure 17 – Connection of LS to LTC to PM for reference setting	41
Figure 18 – Connection of LTC to TTC to verify attenuation of reference connectors	41
Figure 19 – Connections to MPTL for attenuation measurement	42
Figure 20 – Connection of LS to LTC to PM for reference setting	44
Figure 21 – Connection of LTC to TTC for test-cord verification	44
Figure 22 – Connections to link or permanent link attenuation	45
Figure 23 – Connection of LS to LTC to PM for reference setting	47
Figure 24 – Connection of LTC to PCTC to TTC to verify the attenuation of reference connectors	47

Figure 25 – Connections to E2E link for attenuation measurement.....	48
Figure 26 – Connection of LS to LTC to PM for reference setting.....	50
Figure 27 – Connection of LTC to TTC for test-cord verification.....	50
Figure 28 – Connection of LTC to PCTC to TTC for enhanced-three-test-cord verification.....	50
Figure 29 – MPO to single fibre link attenuation testing where no pin conversion is required on launch test cord.....	51
Figure 30 – MPO to single fibre link attenuation testing where pin conversion is required on LTC.....	51
Figure 31 – OTDR measurement of installed cabling (permanent link) – linear regression measurement method.....	54
Figure 32 – OTDR measurement of installed cabling (channel): two-point attenuation measurement method.....	56
Figure 33 – OTDR measurement of optical fibre attenuation.....	64
Figure 34 – OTDR measurement of connection attenuation.....	66
Figure 35 – OTDR measurement of joint attenuation.....	67
Figure 36 – OTDR measurement of return loss.....	69
Figure 37 – Determination of length using an OTDR.....	71
Figure 38 – OTDR characterization of a SMF permanent link containing a break.....	71
Figure 39 – OTDR characterization of a permanent link containing a macrobend.....	72
Figure A.1 – Measurement of launch test cord, tail test cord and substitution test cord interface attenuation.....	74
Figure E.1 – Example of multimode LC channel interface.....	82
Figure E.2 – Example of multimode LC link interface.....	82
Figure E.3 – Example of MPO channel interface.....	83
Figure E.4 – Example of MPO link interface.....	83
Figure E.5 – Example of MPO ferrule with normal illumination (left) and side illumination (right).....	83
Figure E.6 – Example of single-mode LC channel interface.....	84
Figure E.7 – Example of single-mode LC link interface.....	84
Figure E.8 – Example of single-mode LC/APC channel interface.....	84
Figure E.9 – Example of single-mode LC/APC link interface.....	84
Figure E.10 – Example of SM MPO APC channel interface.....	85
Figure E.11 – Example of SM MPO/APC link interface.....	85
Figure F.1 – Connection of LS to LTC to PM for reference setting.....	87
Figure F.2 – Connection of LTC to STC to TTC for enhanced-three-test-cord verification.....	87
Figure F.3 – Connections to link or permanent link for attenuation measurement where no pin conversion is required on test cords.....	87
Table 1 – MMF spectral requirements.....	19
Table 2 – SMF spectral requirements.....	19
Table 3 – Connector identification and attenuation test limits.....	22
Table 4 – Single fibre MM reference connector requirements.....	22
Table 5 – Single fibre single-mode reference connector requirements.....	23
Table 6 – Multi-fibre MM reference connector requirements.....	23

Table 7 – Multi-fibre single-mode reference connector requirements	23
Table 8 – Default group index values	62
Table 9 – Default backscattering coefficient values	70
Table D.1 – Cladding zone requirements of reference connectors	80
Table D.2 – Core zone requirements of reference connectors	81

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/IEC 14763-3:2024](https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024)

<https://standards.iteh.ai/catalog/standards/iso/4e8d3ff1-829c-4807-ac69-b73cb488d295/iso-iec-14763-3-2024>

INFORMATION TECHNOLOGY – IMPLEMENTATION AND OPERATION OF CUSTOMER PREMISES CABLING –

Part 3: Testing of optical fibre cabling

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
- 3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this document.
- 7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
- 8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
- 9) IEC and ISO draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC and ISO take no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC and ISO had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch> and www.iso.org/patents. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 14763-3 has been prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology. It is an International Standard.

This third edition cancels and replaces the second edition published in 2014 and Amendment 1:2018. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) removal of plastic fibre testing;
- b) addition of testing of MPO cabling;
- c) restructuring of the content;
- d) addition of end-to-end link LSPM testing;
- e) addition of MPTL LSPM testing;
- f) addition of measurement uncertainty for all measurement methods;

- g) introduction of normative inspection for cleanliness to align with the ISO/IEC 11801 series;
- h) testing will support SM ranges up to 10 km;
- i) introduction of new test limits for connector attenuation against reference connector;
- j) introduction of description of reference connectors;
- k) introduction of recommended cleaning methods.

The text of this International Standard is based on the following documents:

Draft	Report on voting
JTC1-SC25/3214/FDIS	JTC1-SC25/3239/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the ISO/IEC 14763 series, published under the general title *Information technology – Implementation and operation of customer premises cabling*, can be found on the IEC website.


This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, available at www.iec.ch/members_experts/refdocs and www.iso.org/directives.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This document has been prepared in support of the International Standard series ISO/IEC 11801.

Figure 1 shows the inter-relationship between the ISO/IEC 11801 series and other International Standards and for cabling systems with related standards.

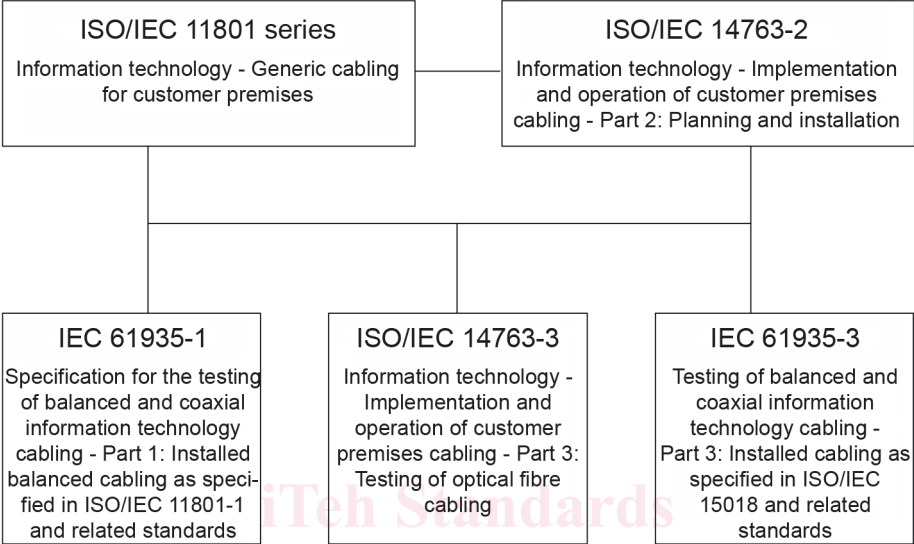

IEC

Figure 1 – Relationship of related International Standards

This document details the inspection and test procedures for optical fibre cabling designed in accordance with premises cabling standards including the ISO/IEC 11801 series and installed in accordance with the requirements and recommendations of ISO/IEC 14763-2.

Users of this document should be familiar with relevant premises cabling standards and ISO/IEC 14763-2.

The quality plan for each installation will define the acceptance tests and sampling levels selected for that installation. Requirements and recommendations for the development of a quality plan are given in ISO/IEC 14763-2.

INFORMATION TECHNOLOGY – IMPLEMENTATION AND OPERATION OF CUSTOMER PREMISES CABLING –

Part 3: Testing of optical fibre cabling

1 Scope

This part of ISO/IEC 14763 specifies systems and methods for the inspection and testing of installed optical fibre cabling designed in accordance with premises cabling standards including the ISO/IEC 11801 series. The test methods refer to existing standards-based procedures where they exist.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11801-1, *Information technology – Generic cabling for customer premises – Part 1: General requirements* (<https://standards.iteh.ai>)

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

IEC 60050-731, *International Electrotechnical Vocabulary – Part 731: Optical fibre communication* (available at <http://www.electropedia.org/>)

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCSs)*

IEC 61280-1-3, *Fibre optic communication subsystem test procedures – Part 1-3: General communication subsystems – Measurement of central wavelength, spectral width and additional spectral characteristics*

IEC 61280-1-4, *Fibre optic communication subsystem test procedures – Part 1-4: General communication subsystems – Light source encircled flux measurement method*

IEC 61280-4-1, *Fibre-optic communication subsystem test procedures – Part 4-1: Installed cabling plant – Multimode attenuation measurement*

IEC 61280-4-5, *Fibre-optic communication subsystem test procedures – Part 4-5: Installed cabling plant – Attenuation measurement of MPO terminated fibre optic cabling plant using test equipment with MPO interfaces*

IEC 61300-3-35, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-35: Examinations and measurements – Visual inspection of fibre optic connectors and fibre-stub transceivers*

IEC 61300-3-42, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-42: Examinations and measurements – Attenuation of single mode alignment sleeves and or adaptors with resilient alignment sleeves*

IEC 61315, *Calibration of fibre-optic power meters*

IEC 61746-1, *Calibration of optical time-domain reflectometers (OTDR) – Part 1: OTDR for single mode fibres*

IEC 61746-2, *Calibration of optical time-domain reflectometers (OTDR) – Part 2: OTDR for multimode fibres*

IEC 61755-2-4, *Fibre optic interconnecting devices and passive components – Connector optical interfaces – Part 2-4: Connection parameters of non-dispersion shifted single-mode physically contacting fibres – Non-angled for reference connection applications*

IEC 61755-2-5, *Fibre optic interconnecting devices and passive components – Connector optical interfaces – Part 2-5: Connection parameters of non-dispersion shifted single-mode physically contacting fibres – Angled for reference connection applications*

IEC 61755-3-1, *Fibre optic connector optical interfaces – Part 3-1: Optical interface, 2,5 mm and 1,25 mm diameter cylindrical full zirconia PC ferrule, single mode fibre*

IEC 61755-3-2, *Fibre optic connector optical interfaces – Part 3-2: Optical interface, 2,5 mm and 1,25 mm diameter cylindrical full zirconia ferrules for 8 degrees angled-PC single mode fibres*

IEC 61755-3-31, *Fibre optic interconnecting devices and passive components – Connector optical interfaces – Part 3-31: Connector parameters of non-dispersion shifted single mode physically contacting fibres – Angled polyphenylene sulphide rectangular ferrules*

IEC 62614-1, *Fibre optics – Multimode launch conditions – Part 1: Launch condition requirements for measuring multimode attenuation*

IEC PAS 63267-3-31, *Fibre optic interconnecting devices and passive components – Fibre optic connector optical interfaces – Part 3-31: End face geometry – Flat PC PPS rectangular ferrule multimode fibres*

3 Terms, definitions, abbreviated terms and symbols

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11801-1, IEC 60050-731 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

adaptor

device that enables interconnection between terminated optical fibre cables

3.1.2 attenuation

A

reduction in optical power induced by transmission through a medium such as optical fibre, given as $A = -10 \log (P_{\text{out}}/P_{\text{in}})$, where P_{in} and P_{out} are the power, typically measured in mW, into and out of the cabling

Note 1 to entry: The values of *A* are in decibel (dB)

3.1.3 attenuation dead zone

<reflective or non-reflective event> region on an OTDR after the event where the displaced trace deviates from the undisturbed backscatter trace by more than a given vertical distance ΔF

Note 1 to entry: ΔF is commonly accepted to be a value of 0,5 dB

[SOURCE: IEC 61746-1:2009, and IEC 61746-2:2010, 3.3, modified – The note has been changed and Figure 1 has not been included.]

3.1.4 bi-directional measurement

technique consisting of two measurements of the same optical fibre, made by launching light into opposite ends of that fibre

3.1.5 cable sheath

covering over the optical fibre or conductor assembly that can include one or more metallic members, strength members or jackets

Note 1 to entry: Sometimes simply referred to as "sheath".

3.1.6 connection

mated device including terminations connecting two cables or cable elements

3.1.7 encircled flux

fraction of cumulative near-field power to the total output power as a function of radial distance from the optical centre of the core

3.1.8 fail result

measured value which fails to meet the specified requirement and where the absolute value of the difference between the measured value and the specified requirement is greater than the stated measurement uncertainty

3.1.9 launch test cord

cable assembly used to connect from a light source to the cabling under test or as part of a test reference measurement

3.1.10 light source and power meter

test system consisting of a light source (LS), power meter (PM) and associated test cords used to measure the attenuation of installed cable plant