



Designation: F2306/F2306M – 14

Standard Specification for 12 to 60 in. [300 to 1500 mm] Annular Corrugated Profile- Wall Polyethylene (PE) Pipe and Fittings for Gravity-Flow Storm Sewer and Subsurface Drainage Applications¹

This standard is issued under the fixed designation F2306/F2306M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope*

1.1 This specification covers requirements and test methods for annular, corrugated profile wall polyethylene pipe and fittings with an interior liner. The nominal inside diameters covered are 12 to 60 in. [300 to 1500 mm].

1.2 The requirements of this specification are intended to provide pipe and fittings suitable for underground use for gravity-flow storm sewer and subsurface drainage systems.

NOTE 1—Pipe and fittings produced in accordance with this specification shall be installed in compliance with Practice D2321.

1.3 This specification covers pipe and fittings with an interior liner using a corrugated exterior profile (Fig. 1).

1.4 *Units*—The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.5 The following precautionary caveat pertains only to the test method portion, Section 7, of this specification. *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D618 Practice for Conditioning Plastics for Testing

D1600 Terminology for Abbreviated Terms Relating to Plastics

D2122 Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings

D2321 Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2412 Test Method for Determination of External Loading Characteristics of Plastic Pipe by Parallel-Plate Loading

D2444 Test Method for Determination of the Impact Resistance of Thermoplastic Pipe and Fittings by Means of a Tup (Falling Weight)

D3212 Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals

D3350 Specification for Polyethylene Plastics Pipe and Fittings Materials

F412 Terminology Relating to Plastic Piping Systems

F477 Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F2136 Test Method for Notched, Constant Ligament-Stress (NCLS) Test to Determine Slow-Crack-Growth Resistance of HDPE Resins or HDPE Corrugated Pipe

2.2 AASHTO Standard:³

AASHTO LRFD Bridge Design Specifications LRFD, Section 12 Bridge Design Specifications Section 12 – Buried Structures and Tunnel Liners

AASHTO M 145 : Classification of Soils and Aggregate Mixtures

2.3 Department of Agriculture Standard:
Standard 606 Soil Conservation Service Engineering⁴

2.4 Federal Standard:
Fed. Std. No. 123 Marking for Shipment (Civil Agencies)⁵

2.5 Military Standard:
MIL-STD-129 Marking for Shipment and Storage⁵

¹ This specification is under the jurisdiction of ASTM Committee F17 on Plastic Piping Systems and is the direct responsibility of Subcommittee F17.62 on Sewer. Current edition approved Nov. 1, 2014. Published December 2014. Originally approved in 2005. Last previous edition approved in 2013 as F2306/F2306M-13. DOI: 10.1520/F2306_F2306M-14.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from American Association of State Highway and Transportation Officials (AASHTO), 444 N. Capitol St., NW, Suite 249, Washington, DC 20001, <http://www.transportation.org>.

⁴ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401. <http://www.gpo.gov/about/bookstore.htm>

⁵ DLA Document Services Building 4/D 700 Robbins Avenue Philadelphia, PA 19111-5094 <http://quicksearch.dla.mil/>

*A Summary of Changes section appears at the end of this standard

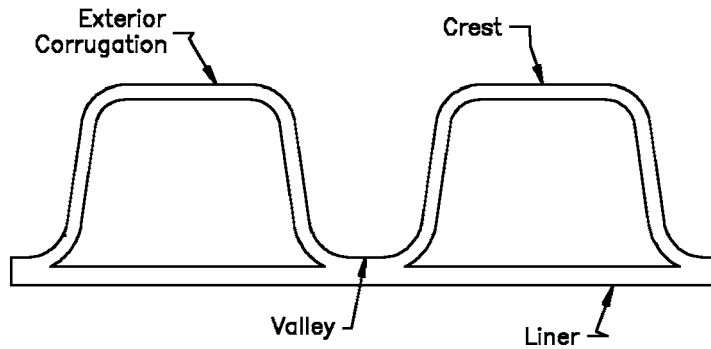


FIG. 1 Typical Annular Corrugated Pipe Profile

2.6 NCHRP (National Cooperative Highway Research Program) Report:⁶

NCHRP Report 631 Updated Test and Design Methods for Thermoplastic Drainage Pipe

3. Terminology

3.1 *Definitions*—Definitions are in accordance with Terminology F412 and abbreviations are in accordance with Terminology D1600, unless otherwise specified. The abbreviation for polyethylene is PE.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *design diameter, n*—the manufacturer’s stated inside diameter.

3.2.2 *mold line, n*—a line formed on the product as a result of the mold blocks coming together during manufacturing.

3.2.3 *profile wall, n*—a pipe wall construction that presents an interior liner in the waterway but includes ribs, corrugations, or other shapes, which can be either solid or hollow, that helps brace the pipe against diametrical deformation.

4. Ordering Information

4.1 Orders for product made to this specification shall include the following information to adequately describe the desired product:

4.1.1 This ASTM designation and year of issue,

4.1.2 Perforations:

4.1.2.1 With perforations,

4.1.2.2 Without perforations,

4.1.3 Diameters,

4.1.4 Total footage of each pipe diameter involved,

4.1.5 Pipe laying length,

4.1.6 Fitting type(s):

4.1.6.1 Size and type of fittings, including mainline and branch diameters, and

4.1.6.2 Number of fittings per diameter.

5. Materials and Manufacture

5.1 *Basic Materials:*

⁶ Transportation Research Board, The National Academies 500 Fifth Street, NW Washington, DC 20001. <http://www.TRB.org>

5.1.1 *Pipe and Blow-Molded Fittings*—The pipe and fittings shall be made of virgin PE plastic compound meeting the requirements of Specification D3350 cell classification 435400C or 435400E, except that carbon black content shall not exceed 4 %. Compounds that have a higher cell classification in one or more properties shall be permitted provided the density of the base resin shall not exceed 0.955 g/cm³ and all other product requirements are met. For slow crack-growth resistance, resins shall be evaluated using the notched constant ligament stress (NCLS) test according to the procedure described in 7.8. The average failure time of the five test specimens shall exceed 24 h with no single test specimen’s failure time less than 17 h.

5.1.2 *Rotationally Molded Fittings and Couplings*—Compounds used in the manufacture of rotationally molded fittings and couplings shall be virgin PE meeting the requirements of Specification D3350 and cell classification 213320C or 213320E, except that the carbon black content shall not exceed 4 %. Compounds that have a higher cell classification in one or more properties shall be permitted provided the density of the base resin shall not exceed 0.940 g/cm³ and all other product requirements are met.

5.1.3 *Injection-Molded Fittings and Couplings*—Compounds used in the manufacture of injection molded fittings and couplings shall be made of virgin PE meeting the requirements of Specification D3350 and cell classification 414420C or 414420E, except that the carbon black content shall not exceed 4 %. Compounds that have a higher cell classification in one or more properties shall be permitted provided all other product requirements are met.

5.2 *Rework Material*—Clean rework material generated from the manufacturer’s own pipe and fittings production shall be permitted to be used by the same manufacturer, provided that the material meets the requirements of 5.1.1 or 5.1.2 as applicable for the intended part and pipe or fittings produced meet all the requirements of this specification.

6. General Requirements

6.1 *Workmanship*—The pipe and fittings shall be homogeneous throughout and be as uniform as commercially practical in color, opacity, and density. The pipe walls shall be free of cracks, holes, blisters, voids, foreign inclusions, or other defects that are visible to the naked eye and that may affect the

wall integrity. The ends shall be cut cleanly and squarely. Holes intentionally placed in perforated pipe are acceptable.

6.1.1 Visible defects, cracks, creases, splits, obstruction to flow in perforations, or in pipe are not permissible.

6.2 Dimensions and Tolerance:

6.2.1 *Nominal Size*—The nominal size for the pipe and fittings shall be the inside diameter shown in **Table 1**.

6.2.2 *Inside Diameter*—The average inside diameter for pipe and fittings shall not vary more than $\pm 1\%$ from the design diameter when measured in accordance with **7.4.1**.

NOTE 2—The outside diameters and the corrugation pitch of products manufactured to this specification are not specified; therefore, compatibility between pipe and fittings from different manufacturers or the same manufacturer shall be verified.

6.2.3 *Length*—The pipe shall be supplied in any length agreeable to both the owner and the manufacturer. Length shall not be less than 99% of stated quantity when measured in accordance with **7.4.2**.

6.2.4 *Minimum Inner-Liner Thickness*—The minimum inner-liner thickness of the pipe shall meet the requirements given in **Table 1** when measured in accordance with **7.4.3**.

6.2.5 *Perforations*—Perforations shall be cleanly cut, placed in the valley of the corrugation rib, and uniformly spaced along the length and circumference of the pipe. Dimensions of the perforations and the minimum perforation inlet area shall be as listed in **Table 2**. Other perforation dimensions and configurations shall be permitted, where required to meet the needs of the specifier. All measurements shall be made in accordance with **7.4.4**. Pipe connected by bell and spigot joints shall not be perforated in the area of the bells and spigots.

NOTE 3—For perforated pipe applications, the size of the embedment zone and permeability of the embedment material provide the desired level of infiltration or exfiltration. The pipe or embedment zone shall be wrapped with a geotextile designed to prevent migration of fine soils into the pipe or embedment zone. Where a geotextile is not used, the gradation of the embedment material shall be compatible with the perforation size to avoid backfill migration into the pipe.

6.3 *Pipe Stiffness*—Minimum pipe stiffness at 5% deflection shall meet the requirements given in **Table 1** when tested in accordance with **7.5**.

NOTE 4—The 5% deflection criterion, which was selected for testing convenience, is not a limitation with respect to in-use deflection. The engineer is responsible for establishing the acceptable deflection limit.

TABLE 1 Pipe Stiffness and Pipe Dimensions

Pipe Inside Diameter		Minimum Pipe Stiffness at 5% Deflection		Minimum Inner Liner Thickness	
in.	[mm]	lb/in./in.	[kPa]	in.	[mm]
12	[300]	50	[345]	0.035	[0.9]
15	[375]	42	[290]	0.040	[1.0]
18	[450]	40	[275]	0.051	[1.3]
21	[525]	38	[260]	0.060	[1.5]
24	[600]	34	[235]	0.060	[1.5]
27	[675]	30	[205]	0.060	[1.5]
30	[750]	28	[195]	0.060	[1.5]
36	[900]	22	[150]	0.067	[1.7]
42	[1050]	20	[140]	0.071	[1.8]
48	[1200]	18	[125]	0.071	[1.8]
54	[1350]	16	[10]	0.079	[2.0]
60	[1500]	14	[95]	0.079	[2.0]

TABLE 2 Perforation Dimensions

Pipe Inside Diameter	Type of Perforation				
	Circular				
	Maximum Diameter		Minimum Inlet Area		
in.	[mm]	in.	[mm]	in. ² /ft	[cm ² /m]
12	[300]	$\frac{3}{8}$	[10]	1.5	[30]
15	[375]	$\frac{3}{8}$	[10]	1.5	[30]
18	[450]	$\frac{3}{8}$	[10]	1.5	[30]
21	[525]	$\frac{3}{8}$	[10]	2.0	[40]
24	[600]	$\frac{3}{8}$	[10]	2.0	[40]
27	[675]	$\frac{3}{8}$	[10]	2.0	[40]
30	[750]	$\frac{3}{8}$	[10]	2.0	[40]
36	[900]	$\frac{3}{8}$	[10]	2.0	[40]
42	[1050]	$\frac{3}{8}$	[10]	2.0	[40]
48	[1200]	$\frac{3}{8}$	[10]	2.0	[40]
54	[1350]	$\frac{3}{8}$	[10]	2.0	[40]
60	[1500]	$\frac{3}{8}$	[10]	2.0	[40]

6.4 *Pipe Flattening*—There shall be no evidence of splitting, cracking, breaking, separation of seams, separation of the outer and inner wall, or combinations thereof, when tested in accordance with **7.6**. Additionally, at or below the deflection limit defined in **Eq 1**, the specimen shall be considered as failing this test when the load does not increase continuously with increasing deflection.

Buckling Deflection Limit:

$$\Delta b = \frac{6.15\% \cdot 0.5 \cdot D}{D_f \cdot 0.6 \cdot h_p} \quad (1)$$

where:

Δb = minimum buckling deflection limit (%)

D = mean diameter (centroid) of pipe (in [mm])

D_f = shape factor (dimensionless fixed value of 4.27 for parallel plate test)

h_p = corrugation height (in [mm])

NOTE 5—Field deflection limits are typically taken at 5% (see **Annex A1**). **Eq 1** is based on the results from NCHRP Report 631 and is defined as being derived from the standard parallel plate test equation. The constant value 6.15% (0.0615) in **Eq 1** is the factored combined strain limit for HDPE pipe per AASHTO LRFD Section 12. The constant value 0.6 in this equation is an estimated centroidal distance for typical profiles produced per this specification.

6.5 *Pipe Impact Strength*—There shall be no evidence of splitting, cracking, breaking, separation of seams, separation of the outer and inner wall, or combinations thereof, when tested in accordance with **7.7**.

6.6 Fittings and Joining Systems:

6.6.1 Only fittings supplied or recommended by the pipe manufacturer should be used. Fittings shall be installed in accordance with the manufacturer's recommendations.

6.6.2 The joining system(s) shall be of a design that preserves alignment during construction and prevents separation at the joints. Bell and spigot, external snap or split couplers are examples of typical designs.

6.6.3 Fittings shall be supplied with joints compatible with the overall system. All joints for gravity-flow Sewer systems shall meet the requirements of **6.6.3.3**. All other joints shall meet the requirements of a soil-tight joint unless otherwise specified by the owner/designer.