



FINAL DRAFT International Standard

ISO/FDIS 18487-1

Aerospace series — Titanium tube for 35 MPa operating pressure —

Part 1: Inch series

*Série aérospatiale — Tubes en titane — Pression de service : 35
MPa —*

Partie 1: Série en inches

ISO/TC 20/SC 10

Secretariat: DIN

Voting begins on:

Voting terminates on:

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO/FDIS 18487-1

<https://standards.iteh.ai/catalog/standards/iso/c2370f7e-e74d-46b4-ae53-a3df90e3f105/iso-fdis-18487-1>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

ISO/FDIS 18487-1

<https://standards.itih.ai/catalog/standards/iso/c2370f7e-e74d-46b4-ae53-a3df90e3f105/iso-fdis-18487-1>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Dimensions	2
5 Tolerances	2
6 Technical requirements	3
6.1 General	3
6.2 Composition	3
6.3 Melting practice	3
6.4 Heat treatment and delivery condition	3
6.5 Tensile properties	3
6.6 Microstructure	4
6.6.1 General	4
6.6.2 Grain size	4
6.6.3 Contractile strain ratio (CSR)	4
6.7 Surface condition and texture	4
6.7.1 Surface treatment	4
6.7.2 Surface condition	4
6.7.3 Surface texture, R_a	5
6.8 Ultrasonic inspection	5
6.9 Flarability	5
6.9.1 General	5
6.9.2 Surface contamination	5
6.10 Bending	7
6.11 Flattening	7
6.12 Deformation under pressure test	7
6.13 Impulse pressure fatigue test	8
6.13.1 General	8
6.13.2 Proof test	8
6.13.3 Pressure impulse test	8
6.13.4 Additional test	11
6.13.5 Ultimate (as per CS 25.1435) and burst test	11
7 Quality assurance	12
8 Preparation for delivery	12
8.1 Marking	12
8.2 Packing	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 10, *Aerospace fluid systems and components*.

This second edition cancels and replaces the first edition (ISO 18487-1:2017), of which it constitutes a minor revision.

The changes are as follows:

- the normative reference to ISO 4287, which is withdrawn, has been replaced by ISO 21920-2;
- the normative reference to ISO 8575:2016, which is withdrawn, has been replaced by ISO 8575:2024.

A list of all the parts in the ISO 18487 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is intended to harmonize the technical requirements for titanium tubes used in aerospace with design operating pressure of 35 MPa.

It is noted that, while ISO standards should normally refer only to SI units, large segments of the aerospace industry refer to other measurement systems as a matter of common working practice. The mention of “inch series” in the title of this document reflects this. It recognizes the fact that the nominal sizes referred to in the document, which are in common use in the aerospace industry, were originally defined in terms of fractional inches.

Although the tube sizes were originally defined, and are frequently referred to, in terms of non-SI units, all dimensions used in this document are in SI units with inch units given in addition for the convenience of those users more familiar with these.

It is further noted that the standard ISO decimal symbol “,” (comma) is not used as common working practice for inch dimensions. A decimal point is used in the inch dimensions in this document as in many other aerospace standards.

NOTE The use of non-SI units and the decimal point in this document does not constitute general acceptance of measurement systems other than SI within International Standards.

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/FDIS 18487-1](https://standards.iteh.ai/catalog/standards/iso/c2370f7e-e74d-46b4-ae53-a3df90e3f105/iso-fdis-18487-1)

<https://standards.iteh.ai/catalog/standards/iso/c2370f7e-e74d-46b4-ae53-a3df90e3f105/iso-fdis-18487-1>

Aerospace series — Titanium tube for 35 MPa operating pressure —

Part 1: Inch series

1 Scope

This document is applicable to seamless tubing of circular cross-section made from titanium alloy and intended for use primarily in systems with system operating pressure of 35 MPa (5 080 psi) (Pressure Class J), but usage is not limited to such applications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21920-2, *Geometrical product specifications (GPS) — Surface texture: Profile — Part 2: Terms, definitions and surface texture parameters*

ISO 6772, *Aerospace — Fluid systems — Impulse testing of hydraulic hose, tubing and fitting assemblies*

ISO 8492, *Metallic materials — Tube — Flattening test*

ISO 8575:2024, *Aerospace series — Fluid systems — Hydraulic system tubing*

ISO 10583, *Aerospace fluid systems — Test methods for tube/fitting assemblies*

ISO 12573, *Aircraft — Tubing tolerances — Inch series*

EN 2003-010, *Aerospace series — Titanium and titanium alloys — Test methods — Part 010: Sampling for determination of hydrogen content*

EN 3718, *Aerospace series — Test method for metallic materials — Ultrasonic inspection of tubes*

AS 4076, *Contractile strain ratio testing of titanium hydraulic tubing*

AMS 2634, *Ultrasonic inspection, thin wall metal tubing superseding*

ASTM E112, *Standard test methods for determining average grain size*

ASTM E1409, *Standard test method for determination of oxygen and nitrogen in titanium and titanium alloys by inert gas fusion*

ASTM E1941, *Standard test method for determination of carbon in refractory and reactive metals and their alloys by combustion analysis*

ASTM E1447, *Standard test method for determination of hydrogen in titanium and titanium alloys by the inert gas fusion thermal conductivity/infrared detection method*

ASTM E2371, *Standard test method for analysis of titanium and titanium alloys by direct current plasma and inductively coupled plasma atomic emission spectrometry (Performance-based test methodology)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.


ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

outside diameter

d_1
distance between any two points at 180° to each other around the outside of a single section across the tube

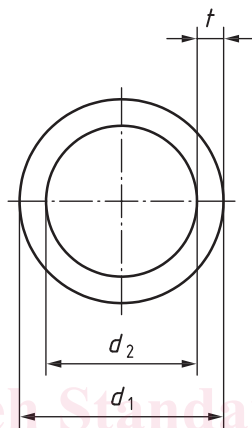

Key

- d_1 outside diameter
 d_2 inside diameter
 t wall thickness

Figure 1 — Outside diameter, inside diameter and wall thickness

3.2

inside diameter

d_2
distance between any two points at 180° to each other around the inside of a single section across the tube

3.3

wall thickness

t
thickness measured at a right angle across the tube wall

4 Dimensions

Unless otherwise specified by the purchaser, dimensions shall conform to ISO 8575:2024, Table 2 that is relevant to Pressure Class J.

5 Tolerances

Unless otherwise specified by the purchaser, dimensional tolerances shall conform to ISO 12573.

6 Technical requirements

6.1 General

Except as otherwise mentioned in 6.2 to 6.13, testing to establish conformity with all of the technical requirements in this clause shall be conducted on a single sample per batch of tubes.

6.2 Composition

Chemical composition shall conform to the mass fractions (in per cent) given in Table 1. Suitable methods of determination of composition are also given in Table 1. Other analytical methods may be used by agreement with the purchaser.

Table 1 — Chemical composition

Values in per cent

Element	Al	V	Fe	O ₂	N ₂	H ₂	C	Y	Others		Ti
									Each	Total	
Minimum	2,50	2,00									Remainder
Maximum	3,50	3,00	0,3	0,120	0,020	0,005 0	0,05	0,005 ^a	0,10 ^a	0,40 ^a	
Method of determination	ASTM E2371			ASTM E1409		ASTM E1447 or EN 2003–010	ASTM E1941	ASTM E2371			
a Determination not required for routine acceptance.											

6.3 Melting practice

Multiple melts are required. Inert gas flooding shall be used for all steps. Open air furnace melting is not permitted. Only vacuum arc remelting (VAR) is permissible for second and subsequent melts.

6.4 Heat treatment and delivery condition

Cold worked and stress relieved by heating in vacuum or inert atmosphere at a temperature of at least 370 °C and maintained for 30 min minimum.

Rotary straightening after final heat treatment is not permitted.

6.5 Tensile properties

Tensile properties at 15 °C for four samples per batch taken in the longitudinal direction shall meet the requirements set out in Table 2. Test method should be according to EN 2002-001 (or ASTM E8a). The method used shall be reported in the certificate. The length of the sample between the clamping jaws of the test equipment shall be at least 300 mm.

Table 2 — Tensile properties

Property		For tubing of diameter in mm (in)	
		$6,35 < d_1 \leq 38,1$ (0.250 < $d_1 \leq 1.500$)	$d_1 = 6,35$ ($d_1 = 0.250$)
Tensile strength MPa (ksi)	Maximum	1 030 (149)	920 (133)
	Minimum	870 (126)	690 (100)
0,2 % Proof stress MPa (ksi)	Minimum	730 (106)	655 (95)
Elongation % ^a	Minimum	16 ^b	14
a Measured over 50 mm or 50,8 mm (2 inches).			
b For tube diameters $\leq 9,53$ mm, 14 % elongation is permissible.			

6.6 Microstructure

6.6.1 General

Microstructure shall be determined by microscopic examination at a minimum of 400× magnification of both longitudinal and transverse sections. The microstructure shall consist of a stretched wrought structure with some areas of partially transformed beta. There shall be no oxygen rich layer such as alpha case or other surface contamination.

6.6.2 Grain size

The grain size shall be determined in accordance with ASTM E112 in the stress-relieved condition. If this is impossible due to excessive grain elongation caused by cold working, complete recrystallization heat treatment prior to grain size determination is permitted. Annealing temperature and holding time shall be stated in the certificate.

6.6.3 Contractile strain ratio (CSR)

When required by the purchaser, the CSR value shall be determined on the finished tube size by the method defined in AS 4076.

The CSR value shall be between 1.3 and 3.5.

When impulse pressure fatigue test (see 6.13) is carried out with samples according to configuration 1, testing to determine the CSR value may be waived by agreement with the purchaser.

6.7 Surface condition and texture

6.7.1 Surface treatment

OD surface shall be chemically milled to remove a minimum of 0,025 mm (0.001 inch) from the surface. Polishing prior to chemical milling is permissible, with traces of polishing operation remaining after the chemical milling.

ID surface shall be chemically milled to remove a minimum of 0,013 mm (0.0005 inch) from the surface. Abrasive grit blasting prior to chemical milling is permissible.

6.7.2 Surface condition

OD and ID surfaces shall be free of diffusion zones, cracks, seams, overlapping, lamination and organic surfaces films such as greases or lubricants.

Individual pits with rounded bottom are acceptable provided the maximum depths in Table 3 are not exceeded.