



Designation: **D6000 – 96 (Reapproved 2008) D6000 – 15**

Standard Guide for Presentation of Water-Level Information from Groundwater Sites¹

This standard is issued under the fixed designation D6000; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope—Scope*

1.1 This guide covers and summarizes methods for the presentation of water-level data from groundwater sites.

NOTE 1—As used in this guide, a site is meant to be a single point, not a geographic area or property, located by an X, Y, and Z coordinate position with respect to land surface or a fixed datum. A groundwater site is defined as any source, location, or sampling station capable of producing water or hydrologic data from a natural stratum from below the surface of the earth. A source or facility can include a well, spring or seep, and drain or tunnel (nearly horizontal in orientation). Other sources, such as excavations, driven devices, bore holes, ponds, lakes, and sinkholes, which can be shown to be hydraulically connected to the groundwater, are appropriate for the use intended.

1.2 The study of the water table in aquifers helps in the interpretation of the amount of water available for withdrawal, aquifer tests, movement of water through the aquifers, and the effects of natural and human-induced forces on the aquifers.

1.3 A single water level measured at a groundwater site gives the height of water at one vertical position in a well or borehole at a finite instant in time. This is information that can be used for preliminary planning in the construction of a well or other facilities, such as disposal pits.

NOTE 2—Hydraulic head measured within a short time from a series of sites at a common (single) horizontal location, for example, a specially constructed multi-level test well, indicate whether the vertical hydraulic gradient may be upward or downward within or between the aquifer (see 7.2.1). Hydraulic head can also be measured within a short time from a series of points, depths, or elevation at a common (single) horizontal location, for example, a specially constructed multi-level test well, indicates whether the vertical hydraulic gradient may be upward or downward within or between the aquifer.

NOTE 1—The phrases “short time period” and “finite instant in time” are used throughout this guide to describe the interval for measuring several project-related groundwater levels. Often the water levels of groundwater sites in an area of study do not change significantly in a short time, for example, a day or even a week. Unless continuous recorders are used to document water levels at every groundwater site of the project, the measurement at each site, for example, use of a steel tape, will be at a slightly different time (unless a large staff is available for a coordinated measurement). The judgment of what is a critical time period must be made by a project investigator who is familiar with the hydrology of the area.

1.4 Where hydraulic heads are measured in a short period of time, for example, a day, from each of several horizontal locations within a specified depth range, or hydrogeologic unit, or identified aquifer, a potentiometric surface can be drawn for that depth range, or unit, or aquifer. Water levels from different vertical sites at a single horizontal location may be averaged to a single value for the potentiometric surface when the vertical gradients are small compared to the horizontal gradients.

NOTE 4—The potentiometric surface assists in interpreting the gradient and horizontal direction of movement of water through the aquifer. Phenomena such as depressions or sinks caused by withdrawal of water from production areas and mounds caused by natural or artificial recharge are illustrated by these potentiometric maps. The potentiometric surface assists in interpreting the gradient and horizontal direction of movement of water through the aquifer. Phenomena such as depressions or sinks caused by withdrawal of water from production areas and mounds caused by natural or artificial recharge are illustrated by these potentiometric maps.

1.5 Essentially all water levels, whether in confined or unconfined aquifers, fluctuate over time in response to natural- and human-induced forces.

NOTE 5—The fluctuation of the water table at a groundwater site is caused by several phenomena. An example is recharge to the aquifer from precipitation. Changes in barometric pressure cause the water table to fluctuate because of the variation of air pressure on the groundwater surface, open bore hole, or confining sediment. Withdrawal of water from or artificial recharge to the aquifer should cause the water table to fluctuate in response. Events such as rising or falling levels of surface water bodies (nearby streams and lakes), evapotranspiration induced by phreatophytic consumption, ocean tides, moon tides, earthquakes, and explosions cause fluctuation. Heavy physical objects that compress the surrounding sediments, for example, a passing train

¹ This guide is under the jurisdiction of ASTM Committee D18 on Soil and Rock and is the direct responsibility of Subcommittee D18.21 on Groundwater and Vadose Zone Investigations.

Current edition approved Sept. 15, 2008/April 15, 2015. Published November 2008/May 2015. Originally approved in 1996. Last previous edition approved in 1996/2008 as D6000 – 96 (2008). (2002). DOI: 10.1520/D6000-96R08; 10.1520/D6000_D6000M-15.

*A Summary of Changes section appears at the end of this standard

or car or even the sudden load effect of the starting of a nearby pump, can cause a fluctuation of the water table (1).²The fluctuation of the water table at a groundwater site is caused by several phenomena. An example is recharge to the aquifer from precipitation. Changes in barometric pressure cause the water table to fluctuate because of the variation of air pressure on the groundwater surface, open bore hole, or confining sediment. Withdrawal of water from or artificial recharge to the aquifer should cause the water table to fluctuate in response. Events such as rising or falling levels of surface water bodies (nearby streams and lakes), evapotranspiration induced by phreatophytic consumption, ocean tides, moon tides, earthquakes, and explosions cause fluctuation. Heavy physical objects that compress the surrounding sediments, for example, a passing train or car or even the sudden load effect of the starting of a nearby pump, can cause a fluctuation of the water table (1).²

1.6 This guide covers several techniques developed to assist in interpreting the water table within aquifers. Tables and graphs are included.

1.7 This guide includes methods to represent the water table at a single groundwater site for a finite or short period of time, a single site over an extended period, multiple sites for a finite or short period in time, and multiple sites over an extended period.

1.8 This guide includes methods to represent the water table at a single groundwater site for a finite or short period of time, a single site over an extended period, multiple sites for a finite or short period in time, does not include methods of calculating or estimating water levels by using mathematical models or determining the aquifer characteristics from data collected during controlled aquifer tests. These methods are discussed in Guides [D4043](#), [D5447](#), and [D5490](#) multiple sites over, Test Methods [D4044](#)an, [D4050](#)extended, [D4104](#)period,.

NOTE 6—This guide does not include methods of calculating or estimating water levels by using mathematical models or determining the aquifer characteristics from data collected during controlled aquifer tests. These methods are discussed in Guides [D4043](#), [D5447](#), and [D5490](#), Test Methods [D4044](#), [D4050](#), [D4104](#), [D4105](#), [D4106](#), [D4630](#), [D4631](#), [D5269](#), [D5270](#), [D5472](#), and [D5473](#).[D4105](#), [D4106](#), [D4630](#), [D4631](#), [D5269](#), [D5270](#), [D5472](#), and [D5473](#).

1.9 Many of the diagrams illustrated in this guide include notations to help the reader in understanding how these diagrams were constructed. These notations would not be required on a diagram designed for inclusion in a project document.

NOTE 7—Use of trade names in this guide is for identification purposes only and does not constitute endorsement by ASTM.

1.10 This guide covers a series of options, but does not specify a course of action. It should not be used as the sole criterion or basis of comparison, and does not replace or relieve professional judgment.

1.11 The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.12 *This guide offers an organized collection of information or a series of options and does not recommend a specific course of action. This document cannot replace education or experience and should be used in conjunction with professional judgment. Not all aspects of this guide may be applicable in all circumstances. This ASTM standard is not intended to represent or replace the standard of care by which the adequacy of a given professional service must be judged, nor should this document be applied without consideration of a project's many unique aspects. The word "Standard" in the title of this document means only that the document has been approved through the ASTM consensus process.*

2. Referenced Documents

2.1 ASTM Standards:³

[D653](#) Terminology Relating to Soil, Rock, and Contained Fluids

[D4043](#) Guide for Selection of Aquifer Test Method in Determining Hydraulic Properties by Well Techniques

[D4044](#) Test Method for (Field Procedure) for Instantaneous Change in Head (Slug) Tests for Determining Hydraulic Properties of Aquifers

[D4050](#) Test Method for (Field Procedure) for Withdrawal and Injection Well Testing for Determining Hydraulic Properties of Aquifer Systems

[D4104](#) Test Method (Analytical Procedure) for Determining Transmissivity of Nonleaky Confined Aquifers by Overdamped Well Response to Instantaneous Change in Head (Slug Tests)

[D4105](#) Test Method for (Analytical Procedure) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Modified Theis Nonequilibrium Method

[D4106](#) Test Method for (Analytical Procedure) for Determining Transmissivity and Storage Coefficient of Nonleaky Confined Aquifers by the Theis Nonequilibrium Method

[D4630](#) Test Method for Determining Transmissivity and Storage Coefficient of Low-Permeability Rocks by In Situ Measurements Using the Constant Head Injection Test

² The boldface numbers in parentheses refer to a list of references at the end of this standard.

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

- ~~D4631 Test Method for Determining Transmissivity and Storativity of Low Permeability Rocks by In Situ Measurements Using Pressure Pulse Technique~~
- ~~D4750 Test Method for Determining Subsurface Liquid Levels in a Borehole or Monitoring Well (Observation Well) (Withdrawn 2010)⁴~~
- ~~D5092 Practice for Design and Installation of Groundwater Monitoring Wells~~
- D5254 Practice for Minimum Set of Data Elements to Identify a Ground-Water Site
- D5269 Test Method for Determining Transmissivity of Nonleaky Confined Aquifers by the Theis Recovery Method
- D5270 Test Method for Determining Transmissivity and Storage Coefficient of Bounded, Nonleaky, Confined Aquifers
- D5408 Guide for Set of Data Elements to Describe a Groundwater Site; Part One—Additional Identification Descriptors
- D5409 Guide for Set of Data Elements to Describe a Ground-Water Site; Part Two—Physical Descriptors
- D5410 Guide for Set of Data Elements to Describe a Ground-Water Site; Part Three—Usage Descriptors
- D5447 Guide for Application of a Groundwater Flow Model to a Site-Specific Problem
- D5472 Test Method for Determining Specific Capacity and Estimating Transmissivity at the Control Well
- D5473 Test Method for (Analytical Procedure for) Analyzing the Effects of Partial Penetration of Control Well and Determining the Horizontal and Vertical Hydraulic Conductivity in a Nonleaky Confined Aquifer
- D5474 Guide for Selection of Data Elements for Groundwater Investigations
- D5490 Guide for Comparing Groundwater Flow Model Simulations to Site-Specific Information
- D5609 Guide for Defining Boundary Conditions in Groundwater Flow Modeling

3. Terminology

- 3.1 All definitions appear in ~~For common definitions of terms in this standard, refer to Terminology~~ **D653**.
- ~~3.2 aquifer, n—a geologic formation, group of formations, or part of a formation that is saturated and is capable of providing a significant quantity of water. **D653, D5092**~~
- 3.2 Definitions of Terms Specific to This Standard:*
- ~~3.2.1 groundwater site—as used in this guide, a site is meant to be a single point, not a geographic area or property, located by an X,Y, and Z coordinate position with respect to land surface or a fixed datum. A groundwater site is defined as any source, location, or sampling station capable of producing water or hydrologic data from a natural stratum from below the surface of the earth. A source or facility can include a well, spring or seep, and drain or tunnel (nearly horizontal in orientation). Other sources, such as excavations, driven devices, bore holes, ponds, lakes, and sinkholes, which can be shown to be hydraulically connected to the groundwater, are appropriate for the use intended.~~
- ~~3.2.2 hydrograph, n—for groundwater, a graph showing the water level or head with respect to time (2).~~
- ~~3.2.3 water level, n—for groundwater, the level of the water table surrounding a borehole or well. The groundwater level can be represented as an elevation or as a depth below a physical marker on the well casing.~~
- ~~3.3 aquitard, n—a confining bed that retards but does not prevent the flow of water to or from an adjacent aquifer; a leaky confining bed. **D653**~~
- ~~3.4 confined or artesian aquifer, n—an aquifer bounded above and below by confining beds and in which the static head is above the top of the aquifer. **D4050, D4104, D4105, D4106, D5269, D5609**~~
- ~~3.5 hydrograph, n—for groundwater, a graph showing the water level or head with respect to time (2).~~
- ~~3.6 unconfined or water-table aquifer, n—an aquifer that has a water table (3). **D4050, D4105, D4106, D5609**~~
- ~~3.7 water level, n—for groundwater, the level of the water table surrounding a borehole or well. The groundwater level can be represented as an elevation or as a depth below the ground surface. **D4750**~~
- ~~3.8 water table (groundwater table), n—the surface of a groundwater body at which the water pressure equals atmospheric pressure. Earth material below the groundwater table is saturated with water. **D653, D4750**~~

4. Summary of Guide

- 4.1 The Significance and Use section presents the relevance of the tables and diagrams of the water table and related parameters.
- 4.2 A description is given of the selection process for data presentation along with a discussion on water level data preparation.
- 4.3 Tabular methods of presenting water-levels:
- 4.3.1 Tables with single water levels, and
- 4.3.2 Tables with multiple water levels **(43)**.
- 4.4 Graphical methods for presenting water levels:
- 4.4.1 Vertical gradient at a single site,
- 4.4.2 Hydrographs,
- 4.4.3 Temporal trends in hydraulic head,
- 4.4.4 Potentiometric maps,

- 4.4.5 Change maps,
- 4.4.6 Water-table cross sections, and
- 4.4.7 Statistical comparisons of water levels.

4.5 Sources for automated procedures (computer-aided graphics) for basic calculations and the construction of the water-level tables and diagrams are identified.

- 4.5 Keywords.
- 4.6 A list of references is given for additional information.

5. Significance and Use

5.1 Determining the potentiometric surface of an area is essential for the preliminary planning of any type of construction, land use, environmental investigations, or remediation projects that may influence an aquifer.

5.1.1 The potentiometric surface in the proposed impacted aquifer must be known to properly plan for the construction of a water withdrawal or recharge facility, for example, a well. The method of construction of structures, such as buildings, can be controlled by the depth of the groundwater near the project. Other projects built below land surface, such as mines and tunnels, are influenced by the hydraulic head.

5.2 Monitoring the trend of the groundwater table in an aquifer over a period of time, whether for days or decades, is essential for any permanently constructed facility that directly influences the aquifer, for example, a waste disposal site or a production well.

5.2.1 Long-term monitoring helps interpret the direction and rate of movement of water and other fluids from recharge wells and pits or waste disposal sites. Monitoring also assists in determining the effects of withdrawals on the stored quantity of water in the aquifer, the trend of the water table throughout the aquifer, and the amount of natural recharge to the aquifer.

5.3 This guide describes the basic tabular and graphic methods of presenting groundwater levels for a single groundwater site and several sites over the area of a project. These methods were developed by hydrologists to assist in the interpretation of hydraulic-head data.

5.3.1 The tabular methods help in the comparison of raw data and modified numbers.

5.3.2 The graphical methods visually display seasonal trends controlled by precipitation, trends related to artificial withdrawals from or recharge to the aquifer, interrelationship of withdrawal and recharge sites, rate and direction of water movement in the aquifer, and other events influencing the aquifer.

5.4 Presentation techniques resulting from extensive computational methods, specifically the mathematical models and the determination of aquifer characteristics, are contained in the ASTM standards listed in Section 2.

6. Selection and Preparation of Water-Level Data ASTM D6000-15

6.1 ~~Water~~ Measurement and recording of water levels should be subject to rigorous quality-control standards. Correct procedures must be followed and properly recorded in the field and the office in order for the water table to represent that in the aquifer.

6.1.1 ~~Field quality~~ Field quality controls include the use of an accurate and calibrated measuring device, a clearly marked and unchanging measuring point, an accurate determination of the altitude of the measuring point for relating this site to other sites or facilities in the project area, notation of climatic conditions at the time of measurement, such as barometric pressure or tide levels, a system of validating the water-level measurement, and a straightforward record keeping form or digital device.

6.1.2 ~~Digital recording~~ Recording devices must be checked regularly to ensure that a malfunction has not occurred. A properly operating device that transfers the data directly to a digital computer should alleviate any problems with the transposing of numbers occurred and that data is being accumulated and is in a usable form. Many permanently installed devices record water levels at fixed intervals, for example every 15 min. Unless the device is designed to be activated when sudden changes occur, events that cause an instantaneous and short term fluctuation in the water table may not be recorded, for example, earthquakes and explosions. Continuous recording analog devices are used to detect these types of events.

NOTE 8—Many permanently installed digital devices record water levels at fixed intervals, for example every 15 min. Unless the device is designed to be activated when sudden changes occur, events that cause an instantaneous and short term fluctuation in the water table may not be recorded, for example, earthquakes and explosions. Continuous recording analog devices are used to detect these types of events.

6.1.3 ~~Much of the problem in preparation of water-level measurements occurs in the office as the result of transposing numbers. This transposition can result when the numbers are manually transferred from a field form to an office data file, perhaps another form or a digital computer data bank. The accuracy of this transfer, and any succeeding transfers or computations, must be verified, preferably by a coworker, or an independent QA/QC (quality assurance/quality control) officer.~~

6.2 To interpret the significance of the raw water-level data, usually the information is prepared by adjusting to other values by using simple mathematics. For example, the water-level values in relationship to the measuring point are reduced to the altitude of the water table by subtracting the water level (+ or -) from the altitude of the measuring point. This procedure applied to all water levels from sites in the project area reduces these water levels to a common plane for comparison.

6.2.1 Preparation of water-level data for interpreting upward or downward trends over a period of time may require the use of simple regression or moving average/mean computations. A common analysis of the water-level data involves the selection of yearly highs and lows for use in computing high and low trends.

6.2.2 A technique of presenting water levels is to give the value as below or above land surface. This method requires that the numerical relationship of the measuring point and land surface be determined and the value of the measuring point be subtracted (+ or –) from the water-level measurement. This information gives the relationship of a single water level to the land surface at a finite instant in time. At a long-termed monitoring site the fluctuations and trends are shown. These water levels cannot be completely related to other sites in the area without additional computation (determining altitude of water level).

6.2.3 On occasion, the interpretations of human-induced water-table fluctuations at a site are masked by natural events, such as oscillations caused by barometric pressure or ocean tide. The magnitude and frequency of these fluctuations can be determined by monitoring the barometric pressure, ocean tide, and water levels in wells outside the radius of influence of the principal monitored site.

7. Presentation of Water-Level Information

7.1 *Tabular Methods of Presenting Water Levels*—Tables of groundwater levels in project reports vary from single measurements included in lists of related information, for example, well inventory data (Practice D5254, Guides D5408, D5409, D5410, and D5474), to tables that represent a long-term comprehensive record of the water levels at a site. The water levels can be presented as values in feet or metres as related to ~~land surface or the altitude as related to mean sea level~~ the altitude, elevation, NAVD88, or other common level-level reference. These values can be for a time-interval, for example, daily or weekly, giving the high, low, mean, or median water level for each period. Other methods include presenting water levels for a specific time, for example, noon or midnight (43).

NOTE 2—NAVD88 is the North American Vertical Datum of 1988 (NAVD88). It is the vertical control datum of orthometric height established for vertical control surveying in the United States of America based upon the General Adjustment of the North American Datum of 1988. NAVD88 was established in 1991 by the minimum-constraint adjustment of geodetic leveling observations in Canada, the United States, and Mexico. NAVD88 replaced the National Geodetic Vertical Datum of 1929 (NGVD29), previously known as the Sea Level Datum of 1929. Other Countries or jurisdictions may use other systems.

7.1.1 *Tables with Single Water Levels*—A single water level is normally included as one of the data items in a table entitled the “description of selected wells” or “groundwater site-inventory data” in many project reports. This table contains pertinent information from selected groundwater sites of the studied area. Table 1 is an abbreviated example of a “groundwater site-inventory data.” The data included with the water level varies depending upon the priorities of the project, however, the site identification is standard information in most tables.

NOTE 9—The data included with the water level varies depending upon the priorities of the project, however, the site identification is standard information in most tables. Computerized tabular procedures are normally designed to print any data item in any order from the groundwater site files.

7.1.2 *Tables of Multiple Water Levels from Single Sites*—The following are common types of tables used to present groundwater levels from single sites. The format usually depends upon the method and frequency of data collection. Each individual table commonly includes a heading of information that describes the groundwater site. This heading normally contains the site location, owner, aquifer, site or well characteristics, instrumentation, datum and measuring point, relevant remarks, period of record, and extremes for the period of record.

NOTE 10—Each individual table commonly includes a heading of information that describes the groundwater site. This heading normally contains the site location, owner, aquifer, site or well characteristics, instrumentation, datum and measuring point, relevant remarks, period of record, and extremes for the period of record.

7.1.2.1 *Tables of High and Low Water Levels for a Selected Period*—The water levels are retrieved from the continuous analog or digital recorders. The period for selecting the water levels can be of any length, for example, daily, weekly, monthly, seasonally, semiannually, yearly, and for the total period of record. For aquifer testing, for example, it can be for a background period and stress period separately. The table of water levels can be the high, low, or both values for the selected period of record (see Table 2).

TABLE 1 Example Table—Sites With A Single Water Level^Δ

Groundwater Site Inventory					
Site ID	Owner	Geologic Unit	Altitude (in feet above msl)	Date	Water Level (in feet below lsd)
404240116025001	CARLIN TOWN GOVT	110VLFL	5950.	03/31/81	11.37
402100116352001	BEOVAWE FARMS	110VLFL	5650.	03/23/81	77.89
412421117303301	SHELTON SCHOOL	110VLFL	4582.	03/18/81	6.11
404940117475001	J BALLARD	110VLFL	4317.	12/11/80	22.30
374638087054101	OWENSBORO, CITY	1120TSH	405.	10/12/82	53.23

^ΔTable adapted from Ref. (5).

TABLE 2 Example Table—Lowest Water Levels For A Site^A

382150078424001. Local number, 41Q1.
 LOCATION.—Lat 38°21'50", long 78°42'40", Hydrologic Unit 02070005, at Virginia Department of Highways and Transportation garage near McGaheysville.
 Owner: U.S. Geological Survey.
 AQUIFER.—Conococheague limestone of Late Cambrian age.
 WELL CHARACTERISTICS.—Drilled observation water well, diameter 6¼ in., depth 310 ft, cased to 131 ft, open hole 131 to 310 ft.
 INSTRUMENTATION.—Water-level recorder.
 DATUM.—Elevation of land-surface datum is 1105 ft above National Geodetic Vertical Datum of 1929, from topographic map. Measuring point: Top edge of recorder shelf, 3.50 ft above land-surface datum.
 PERIOD OF RECORD.—August 1970 to current year.
 EXTREMES FOR PERIOD OF RECORD.—Highest water level recorded, 60.38 ft below land-surface datum, Dec. 26, 1972; lowest recorded, 87.18 ft below land-surface datum, Oct. 26, 1977.

Water Level, in Feet Below Land-Surface Datum, Water Year October 1982 to September 1983 Lowest Values												
DAY	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
5	73.32	76.01	76.07	71.52	72.79	68.43	65.68	64.46	64.70	66.09	68.04	71.10
10	73.87	76.11	75.60	71.48	71.81	68.14	65.54	64.81	65.09	66.35	68.42	71.72
15	74.39	76.33	75.27	71.69	71.07	68.03	64.41	65.04	65.41	66.62	68.86	72.28
20	74.90	76.60	75.11	72.14	70.34	65.85	64.39	64.53	65.55	66.93	69.32	72.86
25	75.36	76.94	72.94	72.55	69.14	65.88	64.07	64.18	65.60	67.25	69.86	73.48
EOM	75.75	76.98	71.94	73.00	68.76	66.10	64.08	64.54	65.88	67.67	70.52	74.04
WTR YR 1983			HIGHEST 63.81 APR 27, 1983						LOWEST 76.98 NOV 28, 1982			

^ATable adapted from Ref (5).

7.1.2.2 *Mean Water Levels for a Selected Period*—The water levels are retrieved from digital recording media and the mean water levels determined for a specific period by computer procedures. The mean water level can be determined from the analog recorders by use of electronic scanners automatic data recorders or, with more difficulty, manually. The period for determining each water level may be daily, five-day, monthly, etc., and should be determined based on the objective of the project (see Table 3).

7.1.2.3 *Periodic Fixed-time Reading*—Periodic water levels can be selected from the records of analog or digital recorders. The interval between each selected water level may be daily, every fifth day and end of month, weekly, or monthly, with the selected time-of-day constant, for example, the noon reading (see Table 4).

7.1.2.4 *Intermittent Water-level Measurements*—Water levels are considered intermittent when determined manually by instruments such as a steel tape or an electronic water-detection device. These measurements are usually collected by field personnel on a periodic time schedule at groundwater sites where there is no continuous recorder (see Table 5).

7.1.3 *Tables of Water Levels from Multiple Sites*—Tables that include water levels from more than one groundwater site allow for comparison of data from related locations (see Table 6).

7.2 *Graphical Methods of Presenting Water Levels*—Methods to represent water levels include those at a single groundwater site for a finite or short period of time, a single site over an extended period of time, multiple sites for a finite or short period in time, and multiple sites over an extended period of time. Multiple sites where groundwater levels are measured by a continuous

TABLE 3 Example Table—Mean Water Levels For A Site^A

402208074145201. Local I.D., Marlboro 1 Obs. NJ-WRD Well Number, 25-0272.
 LOCATION.—Lat 40°22'08", long 74°14'52", Hydrologic Unit 02030104, on the west side of New Jersey Route 79, 0.9 ml south of Morganville, Monmouth County, New Jersey. Owner: Marlboro Township Municipal Utilities Authority.
 AQUIFER.—Farrington aquifer, Potomac-Raritan-Magothy aquifer system of Cretaceous age.
 WELL CHARACTERISTICS.—Drilled artesian observation well, diameter 6 in., depth 680 ft, screened 670 to 680 ft.
 INSTRUMENTATION.—Digital water-level recorder—60-minute punch.
 DATUM.—Land-surface datum is 116.73 ft above National Geodetic Vertical Datum of 1929. Measuring point: Top edge of recorder shelf, 2.50 ft above land-surface datum.
 REMARKS.—Water level affected by nearby pumping. Missing record from May 19 to July 4 was due to recorder malfunction.
 PERIOD OF RECORD.—March 1977 to current year. Records for 1973 to 1977 are unpublished and are available in files of New Jersey District Office.
 EXTREMES FOR PERIOD OF RECORD.—Highest water level, 144.06 ft below land-surface datum, Apr. 4, 1973; lowest, 190.49 ft below land-surface datum, July 29, 1983.

Water Level, in Feet Below Land Surface Datum, Water Year October 1983 to September 1984 Mean Values												
DAY	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
5	178.44	168.09	161.50	159.63	158.03	158.25	157.72	156.94	...	170.00	169.37	172.95
10	177.44	166.41	161.52	159.12	158.47	158.16	158.17	156.95	...	169.11	168.93	172.67
15	173.78	166.48	160.28	158.45	158.27	157.79	158.00	157.42	...	171.58	168.45	171.39
20	172.68	165.34	160.07	158.25	158.09	157.50	157.99	170.39	169.50	171.09
25	171.04	164.31	159.81	157.83	158.05	157.69	157.39	169.74	171.15	172.76
EOM	170.22	163.51	160.20	157.95	157.94	156.78	157.81	167.63	174.11	171.45
MEAN	174.70	166.15	160.77	158.63	158.27	157.75	157.88	169.50	169.99	172.60
WTR YR 1984		MEAN 164.15			HIGH 155.71 MAY 5					LOW 182.94 OCT 1		

^ATable adapted from Ref (5).

TABLE 4 Abbreviated Table—Noon Water Levels For A Site^A

374638087054101. Map number 1.
 LOCATION.—Lat 37°46'38", long 87°05'41", Hydrologic Unit 05140201, County Code 059, Owensboro East quadrangle, at Owensboro Municipal Utilities water treatment plant, 100 ft (30 m) south of south bank of Ohio River, 0.1 ml (0.2 km) northeast of Davies County High School. 0.3 ml (0.5 km) north of U.S. Highway 60, in Owensboro, Daviess County, Kentucky. Owner: Owensboro Municipal Utilities.
 AQUIFER.—Glacial sand and gravel of Quaternary age. Aquifer code: 112OTSH.
 WELL CHARACTERISTICS.—Drilled unused water-table well, diameter 12 in. (0.30 m), depth 104 ft (32 m), screened 74–104 ft (22.6–31.7 m).
 DATUM.—Altitude of land-surface datum (from topographic map) is about 405 ft (123 m). Measuring point: Floor of recorder shelter 4.33 ft (1.32 m) above land-surface datum.
 REMARKS.—Water level affected by pumping from nearby wells.
 PERIOD OF RECORD.—February 1951 to current year.
 EXTREMES FOR PERIOD OF RECORD.—Highest water level, 18.16 ft (5.54 m) below land-surface datum, May 5, 1983; lowest, 63.21 ft (19.27 m) below land-surface datum, Sept. 17, 1970.

Depth Below Land Surface (Water Level), (ft), Water Year October 1982 to September 1983 Instantaneous Observations at 1200												
DAY	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
1	54.51	48.09	44.14	45.05	55.92	46.52	49.32	30.32	39.39	49.56	50.40	52.97
2	49.52	48.78	44.89	42.32	55.71	47.08	46.04	37.11	43.03	48.96	49.74	52.09
3	49.65	49.20	42.17	48.59	50.84	50.39	46.03	30.69	43.46	43.70	47.87	50.16
4	50.29	47.12	41.20	...	54.38	48.90	50.79	23.20	40.92	43.12	50.86	49.67
5	51.37	47.45	40.22	51.32	49.47	49.12	49.06	18.16	39.86	43.78	49.27	49.56
6	51.73	45.38	45.11	51.86	47.42	44.92	49.22	28.90	44.66	46.53	46.02	51.96
7	50.62	46.26	46.60	54.53	49.47	50.32	48.96	28.47	45.58	46.70	45.89	52.22
Water Levels for Days 8th through 28th Deleted for This Illustration												
29	49.24	45.13	45.73	54.57	...	46.92	41.06	31.82	46.42	51.62	52.73	52.46
30	47.34	48.89	45.69	54.85	...	47.53	36.55	34.78	47.30	49.14	51.46	52.77
31	47.37	...	44.73	55.99	...	50.07	...	36.29	...	48.82	52.22	...
MAX	54.51	49.71	53.19	58.00	55.92	51.26	56.44	38.75	50.57	54.70	54.38	53.72
MIN	46.74	43.70	40.22	42.32	44.76	44.76	36.55	18.16	39.39	43.12	45.89	45.21
WTR YR 1983				HIGH 16.16 MAY 5				LOW 58.00 JAN 20				

^ATable adapted from Ref (5).

TABLE 5 Example Table—Intermittent Water Levels For A Site^A

424202087542301. Local Number, RA-03/22E/21-0005.
 LOCATION.—Lat 42°42'02", long 87°54'23", Hydrologic Unit 04040002. Owner: Chicago, Milwaukee, St. Paul, and Pacific Railroad Co., Racine County, Wisconsin.
 AQUIFER.—Sandstone.
 WELL CHARACTERISTICS.—Drilled unused artesian well, diameter 12 in. (0.30 m), depth 1,176 ft (358 m), cased to 586 ft (179 m), 10 in. (0.25 m) liner 976–1083 ft (297–330 m).
 DATUM.—Altitude of land-surface is 730 ft (225 m) National Geodetic Vertical Datum of 1929. Measuring point: top of casing, 1.00 ft (0.30 m) above land-surface datum.
 REMARKS.—Water level affected by regional pumping of wells.
 PERIOD OF RECORD.—July 1946 to current year.
 EXTREMES FOR PERIOD OF RECORD.—Highest water level measured, 109.00 ft (33.25 m) below land-surface datum, July 29, 1946; lowest water level measured, 264.70 ft (80.68 m) below land-surface datum, Mar. 3, 1981.

Water Level, in Feet Below Land-Surface Datum, Water Year October 1980 to September 1981											
DATE	WATER LEVEL	DATE	WATER LEVEL	DATE	WATER LEVEL	DATE	WATER LEVEL	DATE	WATER LEVEL	DATE	WATER LEVEL
FEB 12	257.00	MAR 17	256.63	MAY 1	262.50	JUN 1	263.30	JUN 29	262.70	SEP 15	263.30
MAR 3	264.70	APR 6	257.40								

^ATable adapted from Ref (5).

recorder or periodically by other methods are valuable for interpreting changes in aquifers caused by discharge and recharge events. These changes can be illustrated by maps and cross sections, and by the comparison of hydrographs.

NOTE 11—The simplest category of the presentation of a water level is from a single groundwater site for a finite instant or short period in time. Water levels measured at a single groundwater site over a period of time give climatic trends and the effects of human and natural stresses on water in the aquifer. Water levels can be measured continuously by analog recorders or digital recorders and intermittently by a steel tape or electronic devices.

7.2.1 The simplest category of the presentation of a water level is from a single groundwater site for a finite instant or short period in time. Water levels measured at a single groundwater site over a period of time give climatic trends and the effects of human and natural stresses on water in the aquifer. Water levels can be measured continuously by recorders and intermittently by a steel tape or electronic devices.

NOTE 12—To interpret hydraulic-head data over the area of a project or political entity, multiple groundwater sites need to be included in the analysis. These sites should be in the same aquifer, widely distributed, and the water levels measured during a short period.

7.2.2 To interpret hydraulic-head data over the area of a project or political entity, multiple groundwater sites may need to be included in the analysis. These sites should be in the same aquifer, widely distributed, and the water levels measured during a short period.

NOTE 13—Multiple sites where groundwater levels are measured by a continuous recorder or periodically by other methods are valuable for interpreting

TABLE 6 Abbreviated Table—Water Levels From Multiple Sites^A

LOCATION.—State of Nevada.
 WELL DEPTH.—Depths are referenced to Land-surface Datum (LSD).
 PERIOD OF RECORD.—Interval shown spans period from earliest measurement to latest measurement, and may include intervals with no record.
 WATER LEVELS.—Levels above LSD are listed as negative values.

Site ID	Well Depth (Ft)	Period of Record	Water Levels (Feet Below Land Surface)					
			Highest	Date	Lowest	Date	Current	Date
415800118370001	200.	1968-	45.58	03/20/68	56.80	05/01/69	51.55	03/17/81
413630119520001	70.	1968-	10.22	03/13/72	14.66	04/10/79	12.34	04/07/81
403200119490001	111.	1966-	37.91	09/15/66	54.97	04/17/79	54.41	03/24/81
402700119250001	109.	1966-	45.20	04/09/69	50.11	03/26/81	50.11	03/23/81
405211119202901	134.	1979-	29.53	04/17/79	31.25	03/23/81	31.25	03/23/81
405208119161501	15.	1967-	3.77	04/16/73	14.21	03/23/81	14.21	03/23/81
405208119161502	66.	1967-	-2.25	06/14/67	9.37	03/23/81	9.37	03/23/81
412954117495001	250.	1971-	50.96	04/30/73	78.11	04/29/71	58.24	03/17/81
413310117482002	95.	1948-	36.54	04/21/48	116.58	03/23/77	72.17	03/17/81
413320117482001	160.	1949-	16.55	01/20/50	123.19	03/23/77	91.85	03/17/81

^A Table adapted from Ref (5).


changes in aquifers caused by discharge and recharge events. These changes can be illustrated by maps and cross sections, and by the comparison of hydrographs.

7.2.3 Vertical Gradient at a Single Site—Multiple water levels can be measured within a short period of time from a series of vertical positions in different aquifers at a specially constructed groundwater site. The data gathered indicates the hydraulic gradient of the waterwater. (5,6)-Examples of the three gradient possibilities from tightly spaced piezometers in a single unit (74) are given in Fig. 1. An example of a downward gradient in eight aquifers (85) is given in Fig. 2. An example of a specially constructed well is a test hole where the water level is measured at progressively deeper positions in the aquifer or a series of aquifers. The well is open to the aquifer at progressively deeper depths and each opening is uniquely accessible for measurement of the water level by a pipe to the surface, or several piezometers or wells that are tightly spaced and each open at a different depth in the aquifer.

NOTE 14—In Fig. 2, water levels at 143 ft (43.58 m), 305 ft (92.96 m), and 460 ft (140.21 m) were measured in 1961, others in 1959. These data are from an area where little development had taken place at the time of the water-level measurements.


NOTE 15—An example of a specially constructed well is a test hole where the water level is measured at progressively deeper positions in the aquifer or a series of aquifers. The well is open to the aquifer at progressively deeper depths and each opening is uniquely accessible for measurement of the water level by a pipe to the surface, or several piezometers or wells that are tightly spaced and each open at a different depth in the aquifer.

7.2.4 Hydrographs—The hydrograph is used to illustrate the fluctuation of the hydraulic head over a period of time at a groundwater site. Interpolated lines (areas of missing or indeterminate record) on hydrographs should be clearly identified. The hydrograph is accompanied commonly with time-related phenomena to help in the interpretation of the fluctuations, for example, precipitation. Recession curves of surface-water hydrographs are used to determine groundwater baseflow in the streams. Some examples of the hydrographs and combined phenomena for a groundwater site follow.

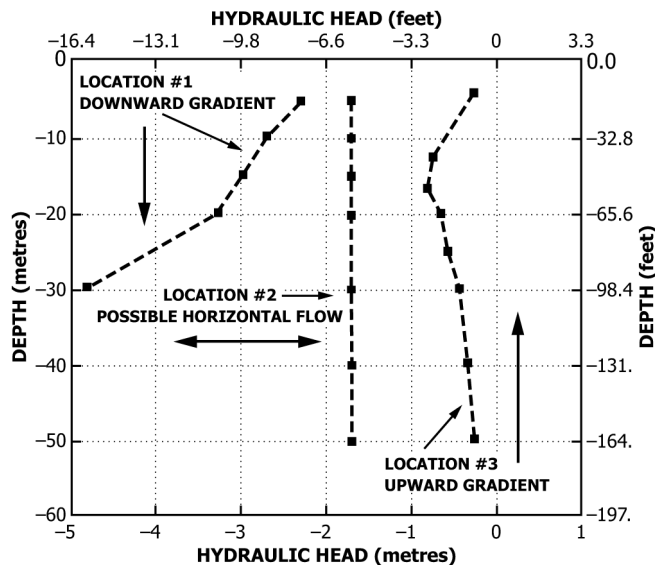

NOTE 1—Location No. 2 is fabricated to simulate horizontal flow.

FIG. 1 Hydraulic Gradient at Three Groundwater Locations (adapted from Ref (85))

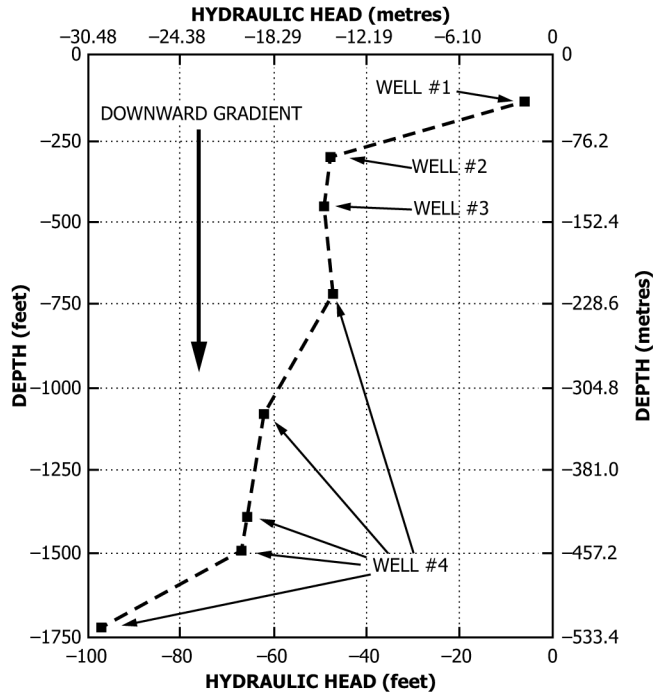


NOTE 1—In this figure, water levels at 143 ft (43.58 m), 305 ft (92.96 m), and 460 ft (140.21 m) were measured in 1961, others in 1959. These data are from an area where little development had taken place at the time of the water-level measurements.

FIG. 2 Hydraulic Gradient at a Groundwater Location (data from four wells) (adapted from Ref (96))

7.2.4.1 *Simple Hydrograph*—The basic hydrograph of the water table at a groundwater site displays the natural and human-induced fluctuations over a period of time. The example hydrograph shows fluctuations controlled by natural conditions from 1971 to 1976, those resulting from pumping withdrawals that began in 1976, and those caused by seasonal variations in pumping that are apparent from 1984 to 1988 (see Fig. 3) (96–10).

NOTE 16—The water level measurements in Fig. 3 average two values per year. These intermittent values are connected by interpolated lines to simulate a continuous hydrograph. Water levels determined by a nearly continuous digital recorder would result in a continuous hydrograph.

7.2.4.2 *Hydrograph Compared with Precipitation that Results in Natural Recharge*—Precipitation that results in recharge to an unconfined aquifer can be analyzed by comparison of the timing and amount of rainfall with the hydrographs of shallow wells in the area. A method of displaying this relationship is by combining a water-table graph and a precipitation line or bar plot onto a single illustration. The time scales for the two sets of data are equal, and the water-table and precipitation data are scaled to emphasize the relationship of the values (see Fig. 4) (1,12–13). Rapid response to recharge events is evident where the travel path from the land surface to the aquifer is short or unrestricted, for example, a shallow sand formation or a karst topography. Heavy

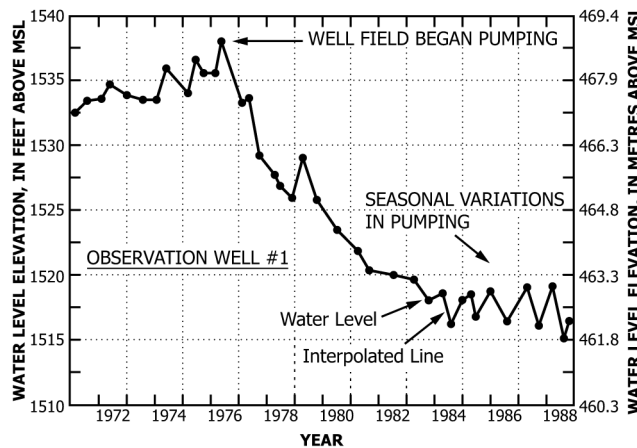

NOTE 1—The water level measurements in Fig. 3 average two values per year. These intermittent values are connected by interpolated lines to simulate a continuous hydrograph. Water levels determined by a nearly continuous digital recorder would result in a continuous hydrograph.

FIG. 3 Example of Simple Hydrograph (adapted from Ref (117))

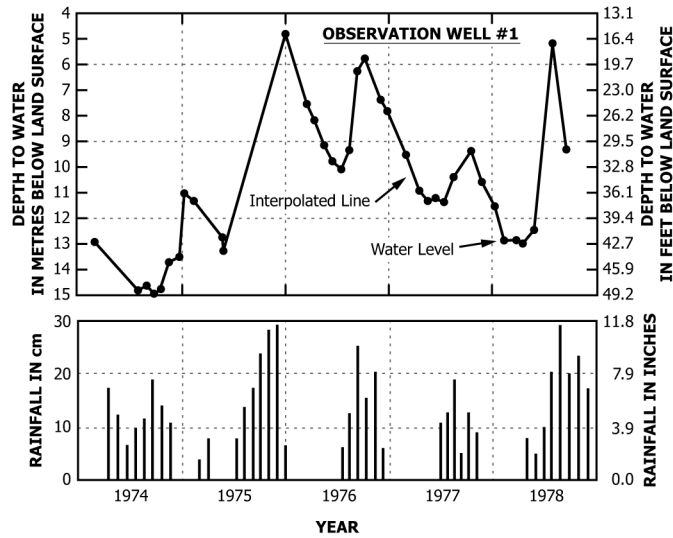


FIG. 4 Hydrograph and Precipitation Plot (adapted from Ref (148))

rainstorms can cause entrapment of air between the recharge water at the surface and a shallow water table. This recharge surge can increase the pressure of the trapped air creating a rapid decline in the water table and a resultant rise of water in open observation wells. The water table will rise when the entrapped air escapes by breaching the recharged water and continue to rise as the recharge water reaches the water table. In aquifers where restrictions occur, for example, intermediate clay layers or aquitards, the response can be dampened or delayed because of a much longer travel time.

NOTE 17—Rapid response to recharge events is evident where the travel path from the land surface to the aquifer is short or unrestricted, for example, a shallow sand formation or a karst topography. Heavy rainstorms can cause entrapment of air between the recharge water at the surface and a shallow water table. This recharge surge can increase the pressure of the trapped air creating a rapid decline in the water table and a resultant rise of water in open observation wells. The water table will rise when the entrapped air escapes by breaching the recharged water and continue to rise as the recharge water reaches the water table. In aquifers where restrictions occur, for example, intermediate clay layers or aquitards, the response can be dampened or delayed because of a much longer travel time.

7.2.4.3 Hydrograph Compared with Artificial Recharge to the Aquifer—Artificial recharge to aquifers can occur from methods that spread water on the land’s surface, for example, irrigation, or from techniques that direct the water below the land’s surface, for example, recharge wells and pits. This type of recharge can be monitored by wells in the area and illustrated by hydrographs (see Fig. 5) (15–16).

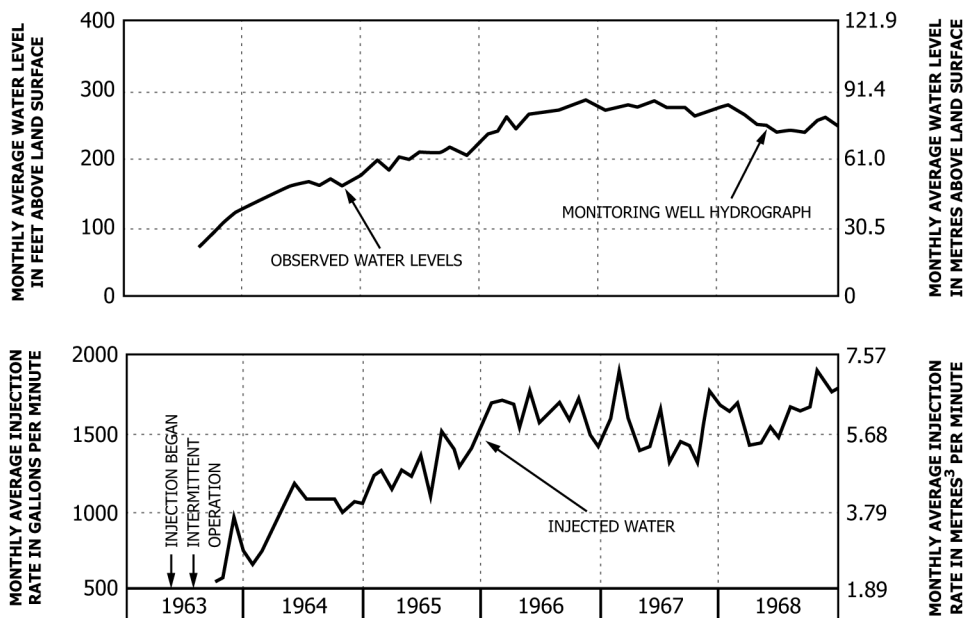


FIG. 5 Hydrograph Showing Effects of Artificial Recharge by Injection Well (adapted from Ref (179))