This document is not an ASTM standard and is intended only to provide the user of an ASTM standard an indication of what changes have been made to the previous version. Because it may not be technically possible to adequately depict all changes accurately, ASTM recommends that users consult prior editions as appropriate. In all cases only the current version of the standard as published by ASTM is to be considered the official document.



Designation: C1321 - 14 C1321 - 15

Standard Practice for Installation and Use of Interior Radiation Control Coating Systems (IRCCS) in Building Construction¹

This standard is issued under the fixed designation C1321; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ε) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This practice has been prepared for use by the designer, specifier, and applicator of IRCCS (Interior Interior Radiation Control Coating Systems) Systems (IRCCS) for use in building construction. The scope contains instructions related to the use and installation of IRCCS, including a surface(s) having a far-infrared emittance of 0.25 or less that is sprayed or painted. IRCCS that are sprayed, rolled, or brush Some examples applied. Examples that this practice is intended to address include: (1) low emittance surfaces in vented building surfaces intended to retard radiant transfer across the vented airspace; (2) low emittance surfaces at interior building surfaces intended to reduce radiant transfer to or from building inhabitants; and (3) low emittance surfaces at interior building surfaces intended to reduce radiant transfer to or from heating or cooling systems. See Fig. 1 and Fig. 2 for typical applications.

1.2 This practice covers the installation process from pre-installation inspection through post-installation. It does not cover the production of the Interior Radiation Control Coating Materials.

1.3 This practice is not intended to replace the manufacturer's installation instructions, but it shall be used in conjunction with such instructions. This practice is not intended to supersede local, state, or federal codes.

1.4 This practice assumes that the installer possesses a good working knowledge of the application codes and regulations, safety practices, tools, equipment, and methods necessary for the installation of Interior Coating Materials. It also assumes that the installer understands the fundamentals of building construction that affect the installation of an IRCCS.

1.5 When the installation or use of Interior Radiation Control Coating Materials, accessories, and systems pose safety or health problems, the manufacturer shall provide the user appropriate current information regarding any known problems associated with the intended use of the products and shall also provide direction on protective measures to be employed for safe utilization. The user shall establish appropriate safety and health practices and determine the applicability of regulatory requirements prior to use.

1.6 This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use. Specific precautionary statements are contained in Sections 5 and 7.

2. Referenced Documents

2.1 ASTM Standards:²

C168 Terminology Relating to Thermal Insulation

C1371 Test Method for Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers E84 Test Method for Surface Burning Characteristics of Building Materials E96/E96M Test Methods for Water Vapor Transmission of Materials

2.2 NFPA Standards:³

NFPA 54 National Fuel Gas Code


NFPA 211 Standard for Chimneys, Fireplaces and VentsFireplaces, Vents, and Solid Fuel-Burning Appliances

¹ This practice is under the jurisdiction of ASTM Committee C16 on Thermal Insulationand is the direct responsibility of Subcommittee C16.21 on Reflective Insulation. Current edition approved Feb. 1, 2014Nov. 15, 2015. Published March 2014December 2015. Originally approved 1996. Last previous edition approved in 20092014 as

C1321-09.-14. DOI: 10.1520/C1321-14.10.1520/C1321-15.


² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02169-7471, http://www.nfpa.org.

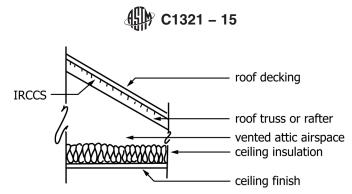

NOTE 1—Apply IRCCS to cover the exposed roof deck area. area including support structure directly connected to the roof deck (such as purlins, rafters, and top chord of the trusses). The low-emittance surface of the IRCCS must face the interior of the attic.

FIG. 1 Typical Residential Use

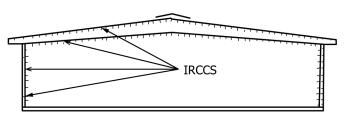

NOTE 1—Apply the IRCCS to cover the entire interior surface area. The low-emittance surface of the IRCCS must face the interior of the bldg.building. FIG. 2 Typical Industrial, Commercial, and Agricultural Use

2.3 Other Documents:

CPSC-Product Safety Fact Sheet No. 18 "The Home Electrical System" Guide to Home Wiring Hazards⁴

3. Terminology

3.1 *Definitions*—For definitions of terms used in this practice, refer to Terminology C168.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 applicator—the person or persons who apply interior reflective coating materials in buildings.

3.2.2 conditioned space—any space in a building that is served by a heating or cooling system.

3.2.3 Interior Radiation Control Coating Systems (IRCCS)—a building construction consisting of a low emittance (0.25 or less) surface bounded by an open air space. An IRCCS is used for the sole purpose of limiting heat transfer by radiation and is not specifically intended to reduce heat transfer by convection or conduction.

3.2.4 *open air space*—a vented building cavity (for example, a vented attic) or a large conditioned or unconditioned building space.

3.2.5 Discussion—A large building space is defined as one whose minimum dimension exceeds two feet.

3.2.6 *owner*—the person, partnership, corporation, agency, or other entity who owns the building in which the IRCCS is to be applied whether such ownership is by virtue of deed, contract, or any other instrument for acquiring legal title under the laws of the state in which the building is located.

4. Significance and Use

4.1 This practice recognizes that effectiveness, safety, and durability of an IRCCS depends not only on the quality of the materials, but also on the proper installation.

4.2 Improper installation of an IRCCS will reduce its thermal effectiveness, cause fire risks and other unsafe conditions, and promote deterioration of the structure in which it is installed. Improper installation has the potential to create specific hazards that include: heat buildup in recessed lighting fixtures, deterioration of failure of electrical wiring components, and deterioration of wood structures and paint failure due to moisture accumulation.

4.3 This practice provides directions for the installation of IRCCS materials in a safe and effective manner. Actual conditions in existing buildings will vary greatly.

4.4 Requirements that are presented in this practice are both general and specific in nature. They are not intended as specific instructions unless so indicated. The user shall consult the manufacturer for application and installation methods.

⁴ Available from Consumer Specialty Products Association (CSPA), 900 17th St., NW, Suite 300, Washington, DC 20006, http://www.espa.org.Product Safety Commission, https://www.epsc.gov.