



SLOVENSKI STANDARD SIST ETS 300 290 E1:2004

01-oktober-2004

Poslovne telekomunikacije (BTC) - Digitalni zakupljeni vodi za prenosno hitrost 64 kbit/s brez omejitev za prenašane signale in z ohranjanjem oktetov (D64U) - Vmesnik terminalske opreme

Business TeleCommunications (BTC); 64 kbit/s digital unrestricted leased line with octet integrity (D64U); Terminal equipment interface

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 290 E1:2004](https://standards.iteh.ai/catalog/standards/sist/03fef0a-6d44-4377-96b7-558899bd8595/sist-ets-300-290-e1-2004)

Ta slovenski standard je istoveten z: **ETS 300 290 Edition 1**

ICS:

33.040.50 Vodi, zveze in tokokrogi Lines, connections and circuits

SIST ETS 300 290 E1:2004 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 290 E1:2004

<https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 290

January 1994

Source: ETSI TC-BTC

Reference: DE/BTC-02026

ICS: 33.020, 33.040.40

Key words: ONP, leased line

**Business Telecommunications (BTC);
64 kbit/s digital unrestricted leased line with octet integrity
(D64U)**

Terminal equipment interface

SIST ETS 300 290 E1:2004
<https://standards.etsi.org/standards-home/35b899bd8395/sist-ets-300-290-e1-2004>

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1994. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 290 E1:2004](https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004>

Contents

Foreword	5
Introduction	5
1 Scope	7
2 Normative references	7
3 Definitions.....	7
4 Symbols and abbreviations.....	8
5 Requirements.....	8
5.1 Physical characteristics	9
5.2 Electrical characteristics	9
5.2.1 Output port	9
5.2.1.1 Signal coding.....	9
5.2.1.2 Waveform shape	10
5.2.1.3 Output timing.....	11
5.2.1.4 Output jitter	11
5.2.1.5 Output return loss.....	12
5.2.1.6 Impedance towards ground	12
5.2.1.7 Longitudinal conversion loss.....	12
5.2.2 Input port.....	13
5.2.2.1 Signal coding	13
5.2.2.2 Input clock tolerance	13
5.2.2.3 Input jitter tolerance	13
5.2.2.4 Input return loss.....	14
5.2.2.5 Input loss tolerance.....	14
5.2.2.6 Immunity against reflections.....	14
5.2.2.7 Impedance towards ground	15
5.2.2.8 Longitudinal conversion loss.....	15
5.3 Safety	15
5.3.1 General requirements	15
5.3.2 Touch current.....	15
5.4 Overvoltage protection	16
5.4.1 Surge simulation, common mode	16
5.4.2 Surge simulation, transverse mode between transmit and receive pairs.....	16
5.4.3 Mains simulation, common mode	16
5.4.4 Mains simulation, transverse mode	16
5.4.5 Impulse transfer from mains, common mode	16
5.4.6 Impulse transfer from mains, transverse mode	17
5.4.7 Conversion of common mode to transverse mode.....	17
5.5 Electro-magnetic compatibility	17
Annex A (normative): Test methods	18
A.1 General.....	18
A.1.1 Additional information to support the test.....	18
A.1.2 Equipment connection.....	18
A.2 Test methods.....	19
A.2.1 Signal coding at output port.....	19
A.2.2 Waveform shape at output port	19

A.2.3	Input coding, loss tolerance and immunity against reflections	20
A.2.4	Return loss at input port.....	21
A.2.5	Input and output jitter	21
A.2.6	Longitudinal conversion loss	23
A.2.7	Impedance towards ground.....	24
Annex B (normative):	Code conversion rules	25
Annex C (informative):	Bibliography.....	26
History		27

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 290 E1:2004](https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Business Telecommunications (BTC) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS results from a mandate from the Commission of the European Community (CEC) to provide harmonised standards for the support of the Directive on Open Network Provision (ONP) of leased lines (92/44/EEC).

There are two other standards directly related to this ETS:

ETS 300 288: "Business Telecommunications (BTC); 64 kbit/s digital unrestricted leased line with octet integrity (D64U), Network interface presentation";

ETS 300 289: "Business Telecommunications (BTC); 64 kbit/s digital unrestricted leased line with octet integrity (D64U), Connection characteristics".

This ETS is based on information from CCITT Recommendations and ETSI publications and the relevant documents are quoted where appropriate.

Introduction

The Council Directive on the application of Open Network Provision (ONP) to leased lines (92/44/EEC) concerns the harmonisation of conditions for open and efficient access to, and use of, the leased lines provided over public telecommunications networks and the availability throughout the Community (EEC) of a minimum set of leased lines with harmonised technical characteristics.

The consequence of the Directive is that Telecommunications Organisations within the EEC shall make available a set of leased lines between points in these countries with specified connection characteristics and specified interfaces.

[SIST ETS 300 290 E1:2004](https://standards.iteh.ai/catalog/standards/sist/03fef0a-6d44-4377-96b7-95899d89951c/sist-ets-300-290-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/03fef0a-6d44-4377-96b7-95899d89951c/sist-ets-300-290-e1-2004>

Two classes of standard will be used for the interfaces of terminal equipment designed for connection to the ONP leased lines. European Telecommunication Standards (ETSS), which are voluntary, give the full technical specifications for these interfaces, whereas Technical Basis for Regulations (TBRs) give the essential requirements under the Second Phase Directive (91/263/EEC) for attachment to the leased lines. This standard, which is an ETS, belongs to the first category. The TBR (TBR 14) is a subset of this corresponding ETS.

ETS 300 166 and CCITT Recommendation G.703 are used as the basis for the terminal interface.

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 290 E1:2004](https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004)

<https://standards.iteh.ai/catalog/standards/sist/0f3fef0a-6d44-4377-96b7-35b899bd8395/sist-ets-300-290-e1-2004>

1 Scope

This ETS specifies the full physical and electrical characteristics and corresponding test principles for a terminal equipment interface for connection to the network termination points of ONP 64 kbit/s digital unrestricted leased lines with octet integrity.

This ETS is not written for regulatory purposes. A separate TBR (TBR 14) covers the essential requirements for attachment under the Second Phase Directive (91/263/EEC).

This ETS is to ensure that the interface of the terminal equipment is compatible with the ONP 64 kbit/s digital unrestricted leased line with octet integrity. It is applicable to all interfaces designed for connection to the leased line, however in the cases of apparatus that carries a particular service, of complex apparatus and of apparatus in private networks, other ETSs may apply in addition to this ETS.

Customer premises wiring and installation between the terminal equipment and the Network Termination Point (NTP) are outside the scope of this ETS.

2 Normative references

This ETS incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] CCITT Recommendation G.703 (1991): "Physical/electrical characteristics of hierarchical digital interfaces".
- [2] CCITT Recommendation O.152 (1988): "Error performance measuring equipment for 64 kbit/s paths".
- [3] EN 60950 (1992): "Safety of information technology equipment including electrical business equipment".
- [4] ETS 300 046-2 (1992): "Integrated Services Digital Network (ISDN); Primary rate access - safety and protection, Part 2: Interface Ia - safety".
- [5] ETS 300 046-3 (1992): "Integrated Services Digital Network (ISDN); Primary rate access - safety and protection, Part 3: Interface Ia - protection".
- [6] ISO/IEC 10173 (1991): "Information technology - Integrated Services Digital Network (ISDN) primary access connector at reference points S and T".

NOTE: This ETS also contains a number of informative references which have been included to indicate the sources from which various material has been derived, hence they do not have an associated normative reference number. Details of these publications are given in Annex C. In some cases the same publication may have been referenced in both a normative and an informative manner.

3 Definitions

For the purposes of this ETS, the following definitions apply:

Leased lines: the telecommunications facilities provided by a public telecommunications network that provide defined transmission characteristics between network termination points and that do not include switching functions that the user can control, (e.g. on-demand switching).

Network Termination Point (NTP): all physical connections and their technical access specifications which form part of the public telecommunications network and are necessary for access to and efficient communication through that public network.

Safety Extra-Low Voltage (SELV) circuit: a secondary circuit which is so designed and protected that under normal and single fault conditions, the voltage between any two accessible parts and, for class 1 equipment, between any accessible part and the equipment protective earthing terminal does not exceed a safe value (subclause 1.2.8.5 of EN 60950 [3]).

Terminal Equipment (TE): equipment intended to be connected to the public telecommunications network, i.e.:

- a) to be connected directly to the termination of a public telecommunication network; or,
- b) to interwork with a public telecommunications network being connected directly or indirectly to the termination of a public telecommunications network,

in order to send, process, or receive information.

4 Symbols and abbreviations

For the purposes of this ETS, the following abbreviations apply:

D64U	64 kbit/s digital unrestricted ONP leased line with octet integrity
dc	direct current
EMC	Electro-Magnetic Compatibility
NTP	Network Termination Point
ONP	Open Network Provision
ppm	parts per million
PRBS(2 ¹¹ -1)	Pseudo Random Bit Sequence (as defined in § 2.1 of CCITT Recommendation O.152 [2])
rms	root mean square
RX	Receive (a signal input at either the leased line interface or the test equipment, see figure 1)
SELV	Safety Extra-Low Voltage
TE	Terminal Equipment
TX	Transmit (a signal output at either the leased line interface or the test equipment, see figure 1)
UI	Unit Interval

5 Requirements

The terminal equipment interface is for use with 64 kbit/s unrestricted leased lines with octet integrity, which provide bidirectional, point-to-point digital connections with a usable bit rate of 64 kbit/s where the leased line output timing is provided from the network. The interface timing arrangements are codirectional.

5.1 Physical characteristics

Requirement: The terminal equipment shall provide an 8-contact plug of the type specified in ISO/IEC 10173 [6] with contact assignments as specified in table 1. In addition, the terminal equipment may provide an alternative method of connection.

NOTE 1: The use of a shielded cord or cable may be necessary to meet radiation and immunity requirements defined in Electro-Magnetic Compatibility (EMC) standards. The common reference point does not necessarily need to be earth.

NOTE 2: The alternative connection method is primarily for the purpose of permitting hardwired presentations of the leased line using insulation displacement terminals and wire with solid conductors having diameters in the range from 0,4 to 0,6 mm.

Table 1: Contact assignment

Contact	Terminal interface
1 & 2	Receive pair
3	Shield reference point (if provided)
4 & 5	Transmit pair
6	Shield reference point (if provided)
7	Unused
8	Unused

NOTE 1: The transmit pair is the output from the terminal equipment interface. The receive pair is the input to the terminal equipment interface, as shown in figure 1. Where the terms "output" and "input" are used without qualification in this ETS, they refer to the terminal equipment interface.

NOTE 2: For connection of the shield, or shields, to the common reference point at the NTP contacts 3 and 6 shall be used.

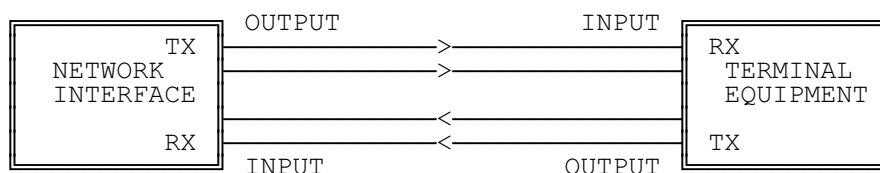


Figure 1

Test: There shall be a visual inspection that the plug is of the correct type. The contact assignments are tested indirectly through the tests in Annex A.

5.2 Electrical characteristics

5.2.1 Output port

5.2.1.1 Signal coding

Requirement: The signal transmitted at the output port shall comply with the encoding rules given in Annex B.

Test: The test shall be conducted according to Annex A, subclause A.2.1.