# INTERNATIONAL STANDARD

# IEC 60297-5-107

First edition 2001-01

Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series –

Part 5-107:
Subracks and associated plug-in units –
Rear-mounted plug-in units

Structures mécaniques pour équipement électronique – Dimensions des structures mécaniques de la série de 482,6 mm (19 in) –

Partie 5-107: Bacs et blocs enfichables associés – Blocs enfichables à montage arrière



### **Publication numbering**

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

#### Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

### Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- IEC Web Site (<u>www.iec.ch</u>)
- Catalogue of IEC publications

The on-line catalogue on the EC web site (www.iec.ch/catlg-e.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

IEC Just Rublished

This summary of recently issued publications (<a href="www.iec.ch/JP.htm">www.iec.ch/JP.htm</a>) is also available by email. Please contact the Customer Service Centre (see below) for further information.

Customer Service Centre

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: <u>custserv@iec.ch</u> Tel: +41 22 919 02 11 Fax: +41 22 919 03 00

## INTERNATIONAL STANDARD

## IEC 60297-5-107

First edition 2001-01

Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series –

Part 5-107:
Subracks and associated plug-in units –
Rear-mounted plug-in units

Structures mécaniques pour équipement électronique – Dimensions des structures mécaniques de la série de 482,6 mm (19 in) –

Partie 5-107: Partie 5-107: Bacs et blocs enfichables associés – Blocs enfichables à montage arrière

© IEC 2001 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission 3, rue de Varembé Geneva, Switzerland Telefax: +41 22 919 0300 e-mail: inmail@iec.ch IEC web site http://www.iec.ch



Commission Electrotechnique Internationale International Electrotechnical Commission Международная Электротехническая Комиссия

PRICE CODE

For price, see current catalogue

Р

### CONTENTS

	Page	Э				
FO	DREWORD	3				
	TRODUCTION					
Pag	ges					
1	1 Scope and object6					
2	Normative references					
3	B Definitions					
4	Extended feature added to IEC 60297-3 and IEC 60297-4 as described in IEC 60297-5-100					
5	General equipment arrangement	3				
6	Detail equipment arrangement	)				
7	Subrack rear mounted plug-in units	)				
	7.1 Rear mounted plug-in unit printed board dimensions	l				
	7.2 Subrack rear mounted plug-in units assembled with IEC 60603-2 and IEC 61076-4-113 connectors – Inspection dimensions					
	7.3 Subrack rear mounted plug-in units assembled with IEC 67076-4-101 connectors	3				
	7.4 Subrack dimensions for front/rear mounted plug-in units	4				
	7.5 Rear subrack mounted plug-in unit guide rail orientation	5				
Fig	gure 1 – General equipment arrangement – Typical 6U subrack with front and rear	R				
Fig	gure 2 – Typical design detail equipment arrangement – Sectional side view					
Fig	gure 3 – Design detail equipment arrangement – Sectional top view of a subrack sembled with plug-in units					
	gure 4 – Subrack front/rear mounted plug-in unit printed board dimensions					
Fig	gure 5 – Subrack rear mounted plug-in unit inspection dimensions for plug-in units sembled with IEC 60603-2 and IEC 61076-4-113 connectors					
Fig	gure 6 – Subrack tront/rear mounted plug-in unit inspection dimensions for plug-in its assembled with IEC 61076-4-101 connectors					
Fig	gure 7 – Subrack inspection dimensions for subrack rear mounted plug-in units sembled with IEC 60603-2, IEC 61076-4-113 and IEC 61076-4-101 connectors					
	gure 8 – Detail view of rear (converted) fixed connector					
_	gure 9 – Subrack rear mounted guide rail orientation16					
Tab	ble 1 – Additional rear mounted plug-in unit printed board dimensions11	I				
	Table 2 – Additional rear mounted plug-in unit inspection dimensions assembled with IEC 60603-2 and IEC 61076-4-113 connectors					
	ble 3 – Additional subrack front/rear mounted plug-in unit inspection dimensions sembled with IEC 61076-4-101 connectors	3				
	ble 4 – Subrack inspection dimensions for subrack rear mounted plug-in units (See	1				

### INTERNATIONAL ELECTROTECHNICAL COMMISSION

## MECHANICAL STRUCTURES FOR ELECTRONIC EQUIPMENT – DIMENSIONS OF MECHANICAL STRUCTURES OF THE 482,6 mm (19 in) SERIES –

### Part 5-107: Subracks and associated plug-in units – Rear mounted plug-in units

#### **FOREWORD**

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedule to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The Es shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60297-5-107 has been prepared by subcommittee 48D: Mechanical structures for electronic equipment of IEC technical committee 48: Electromechanical components and mechanical structures for electronic equipment.

The text of this standard is based on the following documents:

,	FDIS	Report on voting
	48D/244/FDIS	48D/253/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

IEC 60297-5 consists of the following parts under the general title: Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series:

Part 5-100, Subracks and associated plug-in units - Design overview

Part 5-101, Subracks and associated plug-in units – Injector/extractor handle

Part 5-102, Subracks and associated plug-in units – Electromagnetic shielding provision

Part 5-103, Subracks and associated plug-in units – Electrostatic discharge protection

Part 5-104, Subracks and associated plug-in units – Keying

Part 5-105, Subracks and associated plug-in units – Alignment and/or earth pin

Part 5-107, Subracks and associated plug-in units – Rear mounted plug-in units

The committee has decided that the contents of this publication will remain unchanged until 2004. At this date, the publication will be

- · reconfirmed;
- withdrawn;
- · replaced by a revised edition, or
- amended.



### INTRODUCTION

This part of IEC 60297 is based on IEC 60297-3 (1984), its Amendment 1 (1992), and IEC 60297-4 (1995). It contains detail dimensions which ensure dimensional interchangeability of subracks with front mounted plug-in units per IEC 60297-4 requiring additional rear mounted plug-in units as defined in this standard. Front and/or rear subrack mounted plug-in units are mechanically identical (not electrically), however, the rear subrack mounted plug-in unit is mounted in a mirror image position to the front subrack mounted plug-in unit. The component side 1 (printed board reference plane) of the front mounted plug-in unit and the component side 1 of the rear mounted plug-in unit (printed board reference plane) are thus "in line". The first front mounted plug-in unit refers to the first printed board position on the left side of the subrack, viewed from the front. The first rear mounted plug-in unit position on the right side of the subrack, viewed from the rear.

Like many of the IEC 60297-3 and IEC 60297-4 subracks and associated plug-in unit basic dimensions, this standard also refers to the IEC 60603-2 connector series for its basic dimensional relationship.

This standard applies only to the mechanical structures for electronic equipment practices according to the IEC 60297 series.



## MECHANICAL STRUCTURES FOR ELECTRONIC EQUIPMENT – DIMENSIONS OF MECHANICAL STRUCTURES OF THE 482,6 mm (19 in) SERIES –

### Part 5-107: Subracks and associated plug-in units – Rear mounted plug-in units

### 1 Scope and object

This part of IEC 60297 covers extended features of subrack rear mounted plug-in units added to (front mounted) plug-in units and subracks according to IEC 60297-3 and IEC 60297-4. By implementing this extended feature to the subrack and plug-in units, a new subrack and plug-in unit type (incompatible with IEC 60297-3 and IEC 60297-4) is created.

The purpose of this standard is to specify dimensions which will ensure dimensional interchangeability of subracks and associated plug-in units using the extended function of rear subrack mounted plug-in units added to IEC 60297-3 and IEC 60297-4.

For mechanical and climatic tests refer to IEC 61587-1.

For electromagnetic shielding performance tests refer to VE/C/TS 61587-3

### 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of IEC 60297. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of IEC 60297 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of IEC and ISO maintain registers of currently yall'd International Standards.

IEC 60297-3, Dimensions of mechanical structures of the 482,6 mm (19 in) series – Part 3: Subracks and associated plug-in units

IEC 60297-4 Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series – Part 4: Subracks and associated plug-in units – Additional dimensions 1

IEC 60297-5-100, Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series – Part 5-100: Subracks and associated plug-in units – Design overview

IEC 60297-5-101, Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series – Part 5-101: Subracks and associated plug-in units – Injector/extractor handle

IEC 60297-5-105, Mechanical structures for electronic equipment – Dimensions of mechanical structures of the 482,6 mm (19 in) series – Part 5-105: Subracks and associated plug-in units – Alignment and /or earth pin

IEC 60603-2, Connectors for frequencies below 3 MHz for use with printed boards – Part 2: Detail specification for two-part connectors with assessed quality, for printed boards, for basic grid of 2,54 mm (0,1 in) with common mounting features

<sup>&</sup>lt;sup>1</sup> There is a consolidated edition 1.1 (1999) that includes IEC 60297-4 (1995) and its amendment 1 (1999).

IEC 60917-1, Modular order for the development of mechanical structures for electronic equipment practices – Part 1: Generic standard

IEC 61076-2, Connectors for use in d.c., low-frequency analogue and digital high speed data applications – Part 2: Circular connectors with assessed quality – Sectional specification

IEC 61076-4-101, Connectors with assessed quality, for use in d.c. low-frequency analogue and in digital high speed data applications – Part 4: Printed board connectors – Section 101: Detail specification for two-part connector modules having a basic grid of 2,0 mm for printed boards and backplanes in accordance with IEC 917

IEC 61076-4-113, Detail specification for two-part connectors having 5 rows with a grid of 2,54 mm for printed boards and backplanes in bus applications<sup>2</sup>

IEC 61587-1, Mechanical structures for electronic equipment – Tests for IEC 60917 and IEC 60297 – Part 1: Climatic, mechanical tests and safety aspects for cabinets racks, subracks and chassis

IEC/TS 61587-3, Mechanical structures for electronic equipment – Vests for IEC 60917 and IEC 60297 – Part 3: Electromagnetic shielding performance tests for cabinets, racks and subracks

#### 3 Definitions

For the purpose of this part of IEC 60297, the definitions of IEC 60917-1 apply.

### 4 Extended feature added to IEC 60297-3 and IEC 60297-4 as described in IEC 60297-5-100

This standard gives dimensions only where they differ from or supplement those to be found in IEC 60297-3 and 60297-4. The dimensions used in this standard shall take precedence over those of IEC 60297-3 and 60297-4 when conformance to this standard is claimed. Dimensions shown in brackets are for reference only and are found in the stated standards.

The drawings in this standard are not intended to indicate product design.

Extended feature	Basic standards	Extended standards	Environmental standard(s)
Rear mounted plug-in units	IEC 60297-3 IEC 60297-4	IEC 60297-5-107	IEC 61587-1 IEC/TS 61587-3

<sup>&</sup>lt;sup>2</sup> To be published.

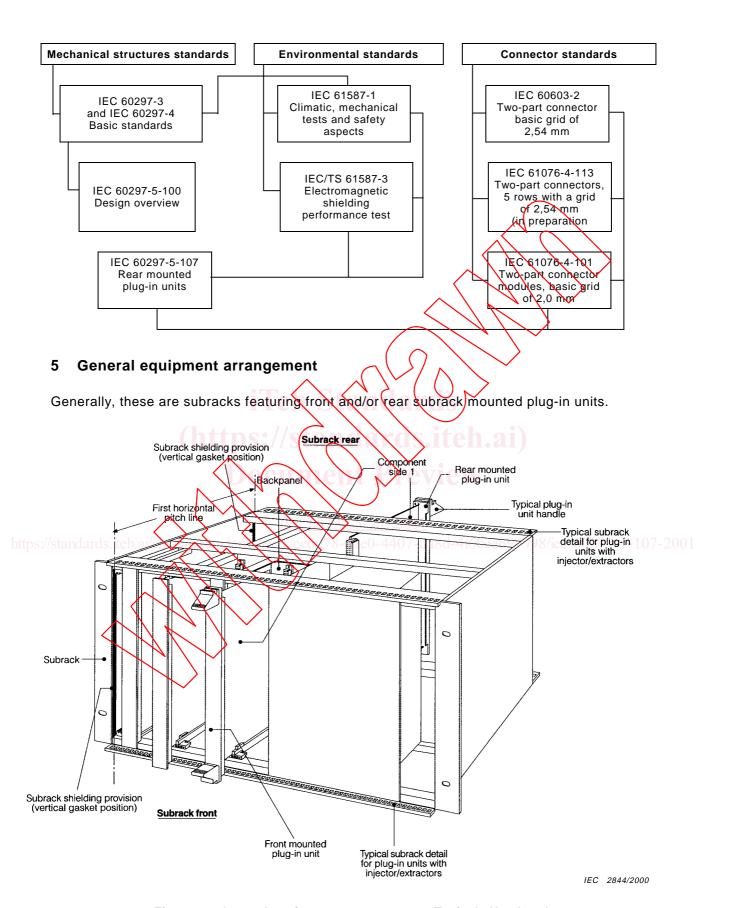


Figure 1 – General equipment arrangement – Typical 6U subrack with front and rear mounted plug-in units