



Designation: F3061/F3061M – 17

Standard Specification for Systems and Equipment in Small Aircraft¹

This standard is issued under the fixed designation F3061/F3061M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This specification covers international standards for the systems and equipment aspects of airworthiness and design for “small” aircraft.

1.2 The applicant for a design approval must seek the individual guidance of their respective CAA body concerning the use of this standard as part of a certification plan. For information on which CAA regulatory bodies have accepted this standard (in whole or in part) as a means of compliance to their Small Aircraft Airworthiness regulations (hereinafter referred to as “the Rules”), refer to ASTM F44 webpage (www.ASTM.org/COMMITTEE/F44.htm) which includes CAA website links.

1.3 The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system may not be exact equivalents; therefore, each system shall be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 Following is a list of external standards referenced throughout this specification; the earliest revision acceptable for use is indicated. In all cases later document revisions are acceptable if shown to be equivalent to the listed revision, or if otherwise formally accepted by the governing civil aviation authority; earlier revisions are not acceptable.

2.2 ASTM Standards:²

¹ This specification is under the jurisdiction of ASTM Committee F44 on General Aviation Aircraft and is the direct responsibility of Subcommittee F44.50 on Systems and Equipment.

Current edition approved Feb. 15, 2017. Published March 2017. Originally approved in 2015. Last previous edition approved in 2016 as F3061/F3061M – 16b. DOI: 10.1520/F3061_F3061M-17.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

[F3060 Terminology for Aircraft](#)

[F3082/F3082M Specification for Flight for General Aviation Aeroplanes](#)

[F3083/F3083M Specification for Emergency Conditions, Occupant Safety and Accommodations](#)

[F3116/F3116M Specification for Design Loads and Conditions](#)

[F3117 Specification for Crew Interface in Aircraft](#)

[F3227/F3227M Specification for Environmental Systems in Small Aircraft](#)

[F3228 Specification for Flight Data and Voice Recording in Small Aircraft](#)

[F3230 Practice for Safety Assessments of Systems and Equipment in Small Aircraft](#)

[F3231/F3231M Specification for Electrical Systems in Small Aircraft](#)

[F3232/F3232M Specification for Flight Controls in Small Aircraft](#)

[F3233/F3233M Specification for Instrumentation in Small Aircraft](#)

[F3234/F3234M Specification for Exterior Lighting in Small Aircraft](#)

[F3236 Specification for High Intensity Radiated Field \(HIRF\) Protection in Small Aircraft](#)

2.3 Other Standards:

[FAA-S-8081-14B, Change 5 Private Pilot Practical Test Standards for Airplane](#)

[RTCA/DO-178, Rev B Software Considerations in Airborne Systems and Equipment Certification](#)

[RTCA/DO-254 Design Assurance Guidance for Airborne Electronic Hardware](#)

2.4 SAE Standards:³

[SAE ARP4754, Rev A Guidelines for Development of Civil Aircraft Systems](#)

3. Terminology

3.1 Terminology specific to this standard is provided below. For general terminology, refer to Terminology [F3060](#).

3.2 Definitions of Terms Specific to This Standard:

³ Available from SAE International (SAE), 400 Commonwealth Dr., Warrendale, PA 15096, <http://www.sae.org>.

3.2.1 *aircraft type code, n*—an Aircraft Type Code (ATC) is defined by considering both the technical considerations regarding the design of the aircraft and the airworthiness level established based upon risk-based criteria. An ATC is expressed as an alphanumeric character string as illustrated in Fig. 1. An explanation of each character in the string is provided below.

3.2.1.1 *Discussion*—The first character in the Aircraft Type Code indicates the risk-based airworthiness level of the aircraft.

(1) A “1” indicates an airworthiness level corresponding to Level 1; this corresponds to seating for one or fewer passengers (excluding crew).

(2) A “2” indicates an airworthiness level corresponding to Level 2; this corresponds to seating for two or more passengers but no more than six (excluding crew).

(3) A “3” indicates an airworthiness level corresponding to Level 3; this corresponds to seating for seven or more passengers but no more than nine (excluding crew).

(4) A “4” indicates an airworthiness level corresponding to Level 4; this corresponds to seating for ten or more passengers but no more than nineteen (excluding crew).

3.2.1.2 *Discussion*—The second character in the Aircraft Type Code indicates the number of engines employed on the aircraft.

(1) An “S” indicates a single-engine aircraft.

(2) An “M” indicates a multiengine aircraft.

3.2.1.3 *Discussion*—The third character in the Aircraft Type Code indicates the type of engine(s) employed on the aircraft.

(1) An “R” indicates use of a reciprocating engine.

(2) A “T” indicates use of a turbine engine.

3.2.1.4 *Discussion*—The fourth character in the Aircraft Type Code indicates the stall speed of the aircraft.

(1) An “L” indicates a stall speed less than or equal to 83 km/h [45 knots].

(2) An “M” indicates a stall speed greater than 83 km/h [45 knots] but less than or equal to 113 km/h [61 knots].

(3) An “H” indicates a stall speed greater than 113 km/h [61 knots].

3.2.1.5 *Discussion*—The fifth character in the Aircraft Type Code indicates the cruise speed of the aircraft.

(1) An “L” indicates a cruise speed less than or equal to 463 km/h [250 knots] (or Mach ≤ 0.6).

(2) An “H” indicates a cruise speed greater than 463 km/h [250 knots] (or Mach > 0.6).

3.2.1.6 *Discussion*—The sixth character in the Aircraft Type Code indicates the allowed meteorological conditions of the aircraft.

(1) A “D” indicates an aircraft limited to Day VFR conditions only.

(2) An “N” indicates an aircraft limited to Day or Night VFR conditions only.

(3) A “I” indicates an aircraft certified for IFR operations.

3.2.1.7 *Discussion*—The seventh character in the Aircraft Type Code indicates the maximum operational altitude of the aircraft.

(1) An “L” indicates an aircraft with a maximum operational altitude equal to or less than 7620 m [25 000 ft].

(2) An “H” indicates an aircraft with a maximum operational altitude greater than 7620 m [25 000 ft].

3.2.1.8 *Discussion*—The eighth character in the Aircraft Type Code indicates the allowed flight maneuvers for the aircraft.

(1) An “N” indicates an aircraft that is limited to non-aerobatic maneuvers.

(2) An “A” indicates an aircraft that is certified for aerobatic maneuvers.

3.2.2 *continued safe flight and landing, n*—continued safe flight and landing is defined as the capability for continued controlled flight and landing, possibly using emergency procedures, but without requiring pilot skill beyond that needed to pass the Private Pilot Practical Test Standard for Airplane (refer to FAA-S-8081-14B), or requiring pilot forces beyond those defined in Specification F3082/F3082M. Landing may occur either at an airport or at an emergency landing location consistent with established emergency procedures. Some aircraft damage may be realized, either during flight or upon landing.

3.2.3 *development assurance level, n*—a development assurance level is an indication of the level of those planned and systematic actions used to substantiate, to an adequate level of

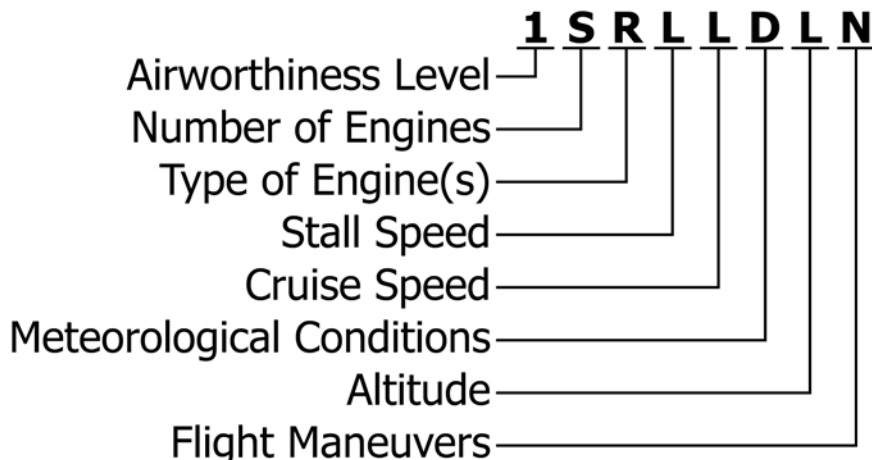


FIG. 1 Illustration of Aircraft Type Code

confidence, that errors in requirements, design, and implementation have been identified and corrected such that the system satisfies the applicable certification basis.

3.2.4 *primary function, n*—a primary function is a function that is installed to comply with applicable requirements for a required function and that provides the most pertinent controls or information instantly and directly to the pilot.

3.2.5 *primary system, n*—a primary system is a system that provides a primary function.

3.2.6 *secondary system, n*—a secondary system is a redundancy system that provides the same function as the primary system.

3.2.7 *unsafe system operating condition, n*—an unsafe system operating condition is any system operating condition which, if not detected and properly accommodated by crew action, would significantly contribute to or cause one or more serious injuries.

4. Basic Information

NOTE 1—Table 1 provides correlation between various Aircraft Type Codes and the individual requirements contained within this section; refer to 3.2.1. For each subsection, an indicator can be found under each ATC character field; three indicators are used:

An empty cell () in all applicable ATC character field columns indicates that an aircraft must meet the requirements of that subsection.

A white circle (○) in multiple columns indicates that the requirements of that subsection are not applicable to an aircraft *only* if all such ATC character fields are applicable.

A mark-out (x) in any of the applicable ATC character field columns indicates that the requirements of that subsection are not applicable to an aircraft if that ATC character field is applicable.

Example—An aircraft with an ATC of 1SRLLDLN is being considered. Since all applicable columns are empty for 4.1.1, that subsection is applicable to the aircraft. Since the “1” airworthiness level column, the “L” stall speed column, and the “D” meteorological column for 4.1.6 all contain white circles, then that subsection is not applicable; however, for an aircraft with an ATC of 1SRMLDLN, 4.1.6 would be applicable since

the “M” stall speed column does not contain a white circle. Subsection 4.2.1.1 would also not be applicable to the second aircraft, since it contains an x in the “M” stall speed column.

NOTE 2—The requirements of this chapter are applicable to all systems and equipment installed in the aircraft. These requirements are in addition to and do not supersede any additional system specific requirements identified elsewhere in these design standards or contained in the rules of the governing civil aviation authority.

4.1 Function and Installation:

4.1.1 Each item of installed equipment must be of a kind and design appropriate to its intended function.

4.1.2 Each item of installed equipment must be marked in a way that makes it clear to an installer the equipment’s identification, function, or operating limitations, or any applicable combination of these factors. It is acceptable to reference equipment installation manuals for function or limitation information.

4.1.3 Each item of installed equipment must be installed according to limitations specified for that equipment.

4.1.4 Each item of installed equipment must function properly when installed.

4.1.5 The aircraft systems and equipment required for type certification or by operating rules must be designed and installed so that they perform as intended under the aircraft operating and environmental conditions.

NOTE 3—The intent of this requirement is to provide assurance that the required systems and equipment will function as intended in the expected operating and environmental conditions. It is recognized that random failures will occur throughout the aircraft life and that the failed device may no longer “perform as intended”. The acceptability of such failures or combination of failures and their associated risks are addressed under the requirements of 4.2.

4.1.6 All aircraft systems and equipment must be designed and installed so that they do not adversely affect the safety of the aircraft or its occupants.

TABLE 1 ATC Compliance Matrix, Section 4

Section	Airworthiness Level				Number of Engines		Type of Engine(s)		Stall Speed			Cruise Speed		Meteorological Conditions			Altitude		Maneuvers	
	1	2	3	4	S	M	R	T	L	M	H	L	H	D	N	I	L	H	N	A
4																				
4.1																				
4.1.1																				
4.1.2																				
4.1.3																				
4.1.4																				
4.1.5																				
4.1.6	○								○					○						
4.1.7																				
4.1.8																				
4.1.8.1																				
4.1.8.2																				
4.2																				
4.2.1																				
4.2.1.1		x	x	x																
4.2.1.2	○								○	x	x			○	x	x				
4.2.1.3	○								○					○						
4.2.1.4	○								○					○						
4.2.2	○								○					○						
4.2.3	○								○					○						
4.2.3.1	○								○					○						
4.2.4									○					○						
4.2.4.1									○					○						
4.2.4.2									○					○						

4.1.7 All aircraft systems and equipment must be designed and installed so that they do not adversely affect the proper functioning of those systems or equipment, or both, covered by 4.1.5.

4.1.8 Those systems and equipment not required for type certification or by operating rules are not required to perform their intended function under all aircraft operating and environmental conditions, provided that the resultant failure conditions are classified as “Negligible Failure Condition” in the assessment conducted per 4.2.1; refer to Practice F3230.

4.1.8.1 Non-required systems and equipment with failure conditions classified more severe than “Negligible Failure Condition” are not required to perform their intended function under all aircraft operating and environmental conditions, provided the failure is appropriately annunciated to the crew.

4.1.8.2 When addressing the requirements of 4.2, if any credit is taken for the installation, or any aspect, of these non-required systems, the portion of the system for which credit is taken must comply with 4.1.4.

4.2 System Safety Requirements:

4.2.1 An assessment of the aircraft and system functions must be performed to identify and classify the various Failure Conditions associated with each function; refer to Practice F3230.

4.2.1.1 The equipment, systems, and installations must be designed to minimize hazards to the aircraft in the event of a probable malfunction or failure; refer to Practice F3230.

4.2.1.2 The aircraft systems and associated components, considered separately and in relation to other systems, must be designed and installed so that each Catastrophic Failure Condition is “extremely improbable”; refer to Practice F3230.

4.2.1.3 The aircraft systems and associated components, considered separately and in relation to other systems, must be designed and installed so that each Hazardous Failure Condition is “extremely remote”; refer to Practice F3230.

4.2.1.4 The aircraft systems and associated components, considered separately and in relation to other systems, must be designed and installed so that each Major Failure Condition is “remote”; refer to Practice F3230.

4.2.2 Based on the results of the assessment per 4.2.1, the depth of analysis required to show compliance may be determined in accordance with Practice F3230.

4.2.3 Software and Airborne Electronic Hardware must be designed with the appropriate development assurance level as specified in Table 2 or in accordance with the Development Assurance Level (DAL) assignment methodology outlined in SAE ARP4754; refer to 3.2.3.

4.2.3.1 In showing compliance with the provisions of 4.2.3, once a DAL is assigned, acceptable means of compliance may be found in RTCA DO-178 or RTCA-DO254 or both; refer to Section 2.

4.2.4 Information concerning an unsafe system operating condition must be provided in a timely manner to the crew to enable them to take appropriate corrective action.

4.2.4.1 In showing compliance with the provisions of 4.2.4, if immediate pilot awareness and immediate or subsequent corrective action is required, the information required by 4.2.4 must be presented in accordance with Specification F3117.

4.2.4.2 In showing compliance with the provisions of 4.2.4, the assessment discussed in 4.2.1 should be used to determine what Failure Conditions would become “Unsafe System Operating Conditions” if the crew failed to take any action or observe appropriate precautions; refer to Practice F3230 and 3.2.7.

5. Electrical Systems

5.1 *Electrical System Requirements*—In addition to the applicable requirements of this specification, electrical systems shall comply with the provisions of Specification F3231/F3231M.

6. Environmental Requirements

6.1 *Ventilation Requirements*—In addition to the applicable requirements of this specification, ventilation systems shall comply with the corresponding provisions of Specification F3227/F3227M.

TABLE 2 Development Assurance Level Requirements

Assessment Level ^A	Classification of Failure Conditions ^A				
	Negligible	Minor	Major	Hazardous	Catastrophic
	Software (SW) and Airborne Electronic Hardware (AEH) Development Assurance Levels (DALs) ^B				
I	No SW and/or HW DAL Requirement	P=D	P=C, S=D (See ^C)	P=C, S=D (See ^C)	P=C, S=C (See ^C)
II		P=D	P=C, S=D (See ^C)	P=C, S=C (See ^C)	P=C, S=C (See ^C)
III		P=D	P=C, S=D (See ^C)	P=C, S=C (See ^C)	P=B, S=C (See ^C)
IV		P=D	P=C, S=D (See ^C)	P=B, S=C (See ^C)	P=A, S=B (See ^C)

^A Refer to Practice F3230.

^B The letters of the alphabet used above denote the typical SW and AEH DALs. “P” indicates the primary system; “S” indicates the secondary system; “A”, “B”, “C”, and “D” indicate the DAL in accordance with RTCA/DO-178B or RTCA/DO-254 as applicable. For example, an indication of “P=A” would translate to a SW or AEH DAL of “A” on the primary system.

^C A secondary system is not necessarily required; however, if a secondary system is needed to meet the probability goals of Practice F3230, then that secondary system must meet the stated DAL goal.

6.2 *Pressurization Requirements*—In addition to the applicable requirements of this specification, pressurization systems shall comply with the corresponding provisions of Specification **F3227/F3227M**.

7. Manual Flight Controls

7.1 *Manual Flight Control Requirements*—In addition to the applicable requirements of this specification, manual flight controls shall comply with the corresponding provisions of Specification **F3232/F3232M**.

8. Automatic Flight Controls

8.1 *Automatic Flight Control Requirements*—In addition to the applicable requirements of this specification, automatic flight controls shall comply with the corresponding provisions of Specification **F3232/F3232M**.

9. Flight Data and Voice Recording

9.1 *Flight Recorder Requirements*—In addition to the applicable requirements of this specification, flight data and voice recording installations shall comply with the provisions of Specification **F3228**.

10. Hazard Mitigation

NOTE 4—**Table 3** provides correlation between various Aircraft Type Codes and the individual requirements contained within this section; refer to **3.2.1**. For each subsection, an indicator can be found under each ATC character field; three indicators are used:

An empty cell () in all applicable ATC character field columns indicates that an aircraft must meet the requirements of that subsection.

A white circle (○) in multiple columns indicates that the requirements of that subsection are not applicable to an aircraft *only* if all such ATC character fields are applicable.

A mark-out (×) in any of the applicable ATC character field columns indicates that the requirements of that subsection are not applicable to an

TABLE 3 ATC Compliance Matrix, Section 10

Section	Airworthiness Level				Number of Engines		Type of Engine(s)		Stall Speed			Cruise Speed		Meteorological Conditions			Altitude		Maneuvers	
	1	2	3	4	S	M	R	T	L	M	H	L	H	D	N	I	L	H	N	A
10																				
10.1	x																			
10.1.1	x																			
10.1.2	x																			
10.1.3	x																			
10.1.4	x																			
10.2																				
10.2.1																				
10.3																				
10.3.1																				
10.3.2																				
10.3.3	x																			
10.3.4	x																			
10.3.5	x																			
10.3.6	x																			
10.3.7	x																			
10.3.8	x																			
10.3.9	x																			
10.4																				
10.4.1																				
10.4.2	x	x	x																	
10.4.3	x	x	x																	
10.4.4	x	x	x																	
10.5																				
10.6																				
10.6.1																				
10.6.2																				
10.6.3																				
10.6.4																				
10.7																				
10.7.1						x														
10.7.2						x														
10.7.3						x														
10.7.4						x														
10.7.5						x														
10.7.6						x														
10.7.7								x												
10.7.7.1								x												
10.7.7.2								x												
10.7.8																				
10.8						x														
10.9																				
10.9.1																				
10.9.2																				
10.9.3																				
10.9.4																				
10.9.5																				

aircraft if that ATC character field is applicable.

Example—An aircraft with an ATC of 1SRLLDLN is being considered. Since all applicable columns are empty for 10.2.1, that subsection is applicable to the aircraft. However, since the “1” airworthiness level column for 10.1.1 contains an ×, then that subsection is not applicable.

10.1 Takeoff Warning System—Unless it can be shown that a lift or longitudinal trim device that affects the takeoff performance of the aircraft would not give an unsafe takeoff configuration when selected out of an approved takeoff position, a takeoff warning system must be installed and meet the requirements of 10.1.1 through 10.1.4.

10.1.1 In showing compliance with 10.1, the system must provide to the pilots an aural warning that is automatically activated during the initial portion of the takeoff roll if the aircraft is in a configuration that would not allow a safe takeoff.

10.1.2 The warning provided in accordance with 10.1.1 must continue until the configuration is changed to allow safe takeoff, or action is taken by the pilot to abandon the takeoff roll.

10.1.3 In showing compliance with 10.1, the means used to activate the system must function properly for all authorized takeoff power settings and procedures and throughout the ranges of takeoff weights, altitudes, and temperatures for which certification is requested.

10.1.4 For the purpose of showing compliance with 10.1, an unsafe takeoff configuration is the inability to rotate or the inability to prevent an immediate stall after rotation. This section is not intended to apply to control locks; refer to Specification F3232/F3232M.

10.2 Pilot Compartment—For each pilot compartment, the pilot and the aerodynamic controls listed in Specification F3117, excluding cables and control rods, must be suitably protected from items of mass departing a propeller.

10.2.1 The provisions of 10.2 may be met by ensuring that no part of the pilot or the controls lies in the region between the plane of rotation of any inboard propeller and the surface generated by a line passing through the center of the propeller hub making an angle of 5° forward or aft of the plane of rotation of the propeller.

10.3 Flammable Fluid Fire Protection:

10.3.1 Lines, tanks, or equipment containing fuel, oil, or other flammable fluids may not be installed in compartments to be used by the crew or passengers unless adequately shielded, isolated, or otherwise protected so that any breakage or failure of such an item would not create a hazard; compliance must be shown by analysis or test.

10.3.2 In each area where flammable fluids or vapors might escape by leakage of a fluid system, there must be means to minimize the probability of ignition of the fluids and vapors, and the resultant hazard if ignition does occur.

10.3.3 Possible sources and paths of fluid leakage, and means of detecting leakage, must be considered when showing compliance with 10.3.1.

10.3.4 Flammability characteristics of fluids, including effects of any combustible or absorbing materials, must be considered when showing compliance with 10.3.1.

10.3.5 Possible ignition sources, including electrical faults, overheating of equipment, and malfunctioning of protective devices, must be considered when showing compliance with 10.3.1.

10.3.6 Means available for controlling or extinguishing a fire, such as stopping flow of fluids, shutting down equipment, fireproof containment, or use of extinguishing agents, must be considered when showing compliance with 10.3.1.

10.3.7 Ability of aircraft components that are critical to safety of flight to withstand fire and heat must be considered when showing compliance with 10.3.1.

10.3.8 If action by the flight crew is required to prevent or counteract a fluid fire (for example, equipment shutdown or actuation of a fire extinguisher), quick acting means must be provided to alert the crew.

10.3.9 Each area where flammable fluids or vapors might escape by leakage of a fluid system must be identified and defined.

10.4 Fire Protection of Cargo and Baggage Compartments:

10.4.1 Sources of heat within each cargo and baggage compartment that are capable of igniting the compartment contents must be shielded and insulated to prevent such ignition.

10.4.2 If the requirements of either 10.4.3 or 10.4.4 are not met, each cargo and baggage compartment must be located where the presence of a fire would be easily discovered by the pilots when seated at their duty station, or it must be equipped with a smoke or fire detector system to give a warning at the pilots’ station, and provide sufficient access to enable a pilot to effectively reach any part of the compartment with the contents of a hand held fire extinguisher.

10.4.3 If the requirements of either 10.4.2 or 10.4.4 are not met, each cargo and baggage compartment must be equipped with a smoke or fire detector system to give a warning at the pilots’ station. In addition, each compartment must meet the requirements of Specification F3083/F3083M.

10.4.4 If the requirements of either 10.4.2 or 10.4.3 are not met, each cargo and baggage compartment must be constructed and sealed to contain any fire within the compartment.

10.5 Fire Protection of Flight Controls—Flight controls located in designated fire zones, or in adjacent areas that would be subjected to the effects of fire in the designated fire zones, must be constructed of fireproof material or be shielded so that they are capable of withstanding the effects of a fire.

10.6 Lines, Fittings, and Components:

10.6.1 Except as provided in 10.6.3 and 10.6.4, components, lines, and fittings must be shielded or located so as to safeguard against the ignition of leaking flammable fluid.

10.6.2 Except as provided in 10.6.3 and 10.6.4, flexible hose assemblies (hose and end fittings) must be shown to be suitable for the particular application.

10.6.3 Subsections 10.6.1 and 10.6.2 do not apply to lines, fittings, and components which are already approved as part of the type certificated engine.

10.6.4 Subsections 10.6.1 and 10.6.2 do not apply to vent and drain lines, and their fittings, whose failure will not result in, or add to, a fire hazard.