



Designation: **F765 – 93 (Reapproved 2012)**<sup>ε1</sup> **F765 – 93 (Reapproved 2017)** American National Standard

## Standard Specification for Wildcats, Ship Anchor Chain<sup>1</sup>

This standard is issued under the fixed designation F765; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the U.S. Department of Defense.*

<sup>ε1</sup> NOTE—Reapproved with editorial change to Referenced Documents section in August 2012.

### 1. Scope

1.1 This specification covers wildcats as used in windlasses to haul in and pay out anchor chain on board ships. An associated chain stopper is used to secure the chain while the ship is anchored, or the anchor is housed.

1.2 Wildcats are of the five whelp type for use with stud link anchor chain conforming to the American Bureau of Shipping Grades 1, 2, and 3. Wildcat dimensions are provided for chains in integral 1/8-in. (3-mm) steps, ranging in size from 3/4 to 4 1/8 in. (19 to 104 mm). Wildcat dimensions for chains in intermediate 1/16-in. (1.5-mm) steps are not provided, but wildcats in these sizes are permitted within the scope of this specification.

1.3 Wildcats are configured to pass detachable links oriented parallel or perpendicular to the wildcat shaft centerline.

1.4 The values stated in inch-pound units are to be regarded as the standard. This specification is for use with anchor chain that is measured in inch-pound units.

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

### 2. Referenced Documents

2.1 *ASTM Standards:*<sup>2</sup>

[A27/A27M Specification for Steel Castings, Carbon, for General Application](#)

[A36/A36M Specification for Carbon Structural Steel](#)

[A148/A148M Specification for Steel Castings, High Strength, for Structural Purposes](#)

[E10 Test Method for Brinell Hardness of Metallic Materials](#)

2.2 *Other Documents:*

[American Bureau of Shipping, Shipping Rules for Building and Classing Steel Vessels, Section, Vessels, Section, 2.2.2 Anchor Chain](#)<sup>3</sup>

[American Welding Society Structural Welding Code, Code Chapter D1.1](#)<sup>4</sup>

### 3. Classification

3.1 The size of the wildcat is identified by the chain size.

3.2 Wildcats are furnished in four types as follows:

3.2.1 *Type I*—Fabricated from structural steel plate for flanges, hubs, whelps, and chain pockets, joined by electric welding. Surface hardness is approximately 150 HB.

3.2.2 *Type II*—Fabricated from structural steel plate for flanges, hubs, and chain pockets; and high-strength steel castings for whelps, joined by electric welding. Surface hardness is approximately 150 HB for flanges and hubs and 300 HB for whelps.

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F25 on Ships and Marine Technology and is the direct responsibility of Subcommittee F25.03 on Outfitting and Deck Machinery.

Current edition approved Aug. 15, 2012; May 1, 2017. Published October 2012; June 2017. Originally approved in 1982. Last previous edition approved in 2006 as F765 – 93 (2006) (2012)<sup>ε1</sup>. DOI: 10.1520/F0765-93R12E01, 10.1520/F0765-93R17.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> Available from American Bureau of Shipping (ABS), ABS Plaza, 16855 Northchase Dr., Houston, TX 77060-77060, <http://www.eagle.org>.

<sup>4</sup> Available from The American Welding Society (AWS), 550 NW LeJeune Rd., 8669 NW 36 St., #130, Miami, FL 33126-33166-6672, <http://www.aws.org>.

3.2.3 *Type III*—Cast from medium-strength carbon steel castings to provide a surface hardness of approximately 150 HB.

3.2.4 *Type IV*—Cast from high-strength steel castings to provide a surface hardness of approximately 300 HB.

#### 4. Descriptions of Terms

4.1 *chain groove*—circumferential groove at the chain centerline to provide clearance for links passing normal to the wildcat shaft centerline.

4.2 *chain pockets*—recesses between the flanges and whelps into which links with flat side orientated parallel to the wildcat shaft centering lay.

4.3 *detachable link*—a “C” shaped link, closed by means of a pair of closing pieces and a taper pin, and used to join anchor chain lengths and appendages into a continuous length aboard ship.

4.4 *flanges*—circumferential rims on the outside of the whelps, chain pockets, and chain groove.

4.5 *link grip*—the inside dimension of a chain link representing the effective length of a chain link in an assembled chain. Generally four times the nominal size of a stud link anchor chain, see Fig. 1.

4.6 *whelps*—protrusions on the inside of the flanges of the wildcat that resemble gear teeth and of such shape and dimensions so as to follow the path of the chain, as it enters and leaves the wildcat. Faces of protrusions are separated by the chain groove to permit links with the flat side normal to the wildcat shaft centerline to pass, but blocking links with the flat side oriented parallel to the wildcat shaft centerline.

4.7 *wildcat*—a rotating member specially contoured to receive assembled chain links and connecting links around the circumference of the member and of suitable strength to impart motion to the chain when rotated.

#### 5. Ordering Information

5.1 Orders for wildcats under this specification shall include the following:

5.1.1 Quantity (number),

5.1.2 Size (chain size),

5.1.3 ASTM designation and date of issue,

5.1.4 Type (I, II, III, or IV),

5.1.5 Size, grade, and type of chain,

5.1.6 Availability of assembled chain and detachable link to be furnished by the purchaser for test (see Section 9),

5.1.7 As-cast or machined dimensions for wildcat bore, hub width, and outside boss diameter, and

5.1.8 Marking (shipping).

#### 6. Materials and Manufacture

6.1 Material for Type I wildcats shall conform to Specification A36/A36M for flanges, hubs, whelps, and chain pockets, joined by electric welding in accordance with AWS, structural welding code Chapter D1.1. Type I wildcats in sizes 2 in. and larger shall be stress-relieved. Material for Type II wildcats shall conform to Specification A36/A36M for flanges and hubs, and chain pockets,

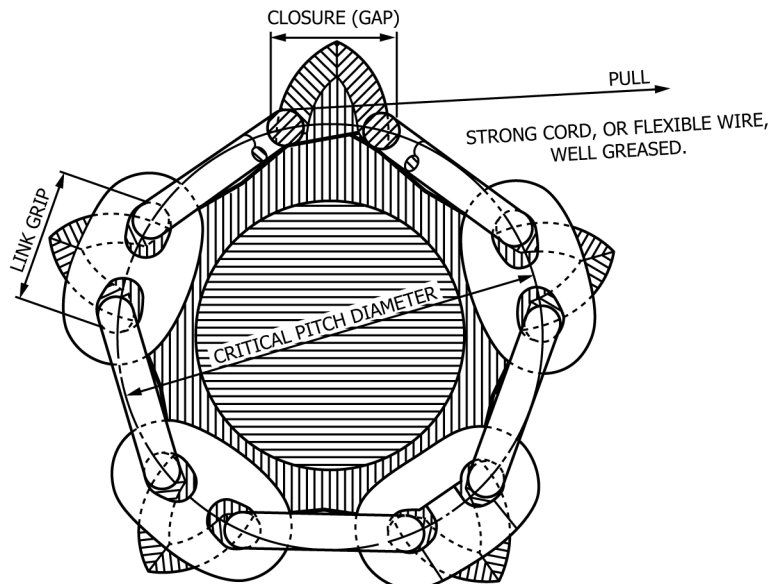


FIG. 1 Chain Wrap Test

