



SLOVENSKI STANDARD SIST ETS 300 231 E1:2003

01-december-2003

Televizijski sistemi; Specifikacija domačih video sistemov za dostavo programov (PDC)

Television systems; Specification of the domestic video Programme Delivery Control system (PDC)

iteh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETS 300 231 Edition 1**
<https://standards.iteh.ai/catalog/standards/sist/47111f1c2-c046-411b-b728-e8a37c263da5/sist-ets-300-231-e1-2003>

ICS:

33.160.40	Video sistemi	Video systems
33.170	Televizijska in radijska difuzija	Television and radio broadcasting


SIST ETS 300 231 E1:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 231 E1:2003

<https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003>

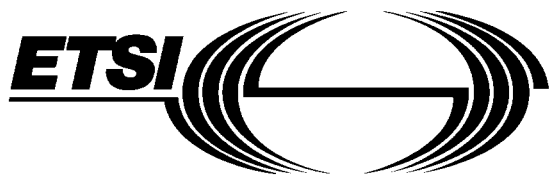

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 231

August 1996

Source: EBU/CENELEC/ETSI-JTC

Reference: DE/JTC-PDC

ICS: 33.020

Key words: Broadcasting, PDC, Teletext, TV, VCR, video

European Broadcasting Union



Union Européenne de Radio-Télévision

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Television Systems;
<https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-1c22da19e10a>
Specification of the domestic video
Programme Delivery Control system (PDC)

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996.

© European Broadcasting Union 1996.

All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 231 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003>

Contents

Foreword	5
Introduction	5
1 Scope	7
2 Normative references	7
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	8
4 Application of the PDC system	9
5 The PDC service	9
6 Programme identification	10
6.1 List of programme identification parameters	10
6.2 Coding of the parameters	13
7 Preselection function for recording equipment	19
7.1 Introduction	19
7.2 Manual entry of PDC programme selection data	19
7.3 Preselection via Teletext	20
7.3.1 Specification of transport method "A"	20
7.3.1.1 General	20
7.3.1.2 Presentation elements of programme-preview pages	21
7.3.1.3 Definition of the formats	22
7.3.1.4 Position assignment rules between elements	26
7.3.1.5 Interpretation of a normal Teletext display page transporting data relevant for the preselection of programmes	28
7.3.2 Specification of transport method "B"	30
7.3.2.1 General	30
7.3.2.2 Presentation elements of programme-preview pages	30
7.3.2.3 Coding of preselection data in extension packets X/26	31
8 Recording-control function	33
8.1 Specification of the recording-control commands	33
8.2 The transport of the recording-control commands	33
8.2.1 Transport via Teletext (ITU-R system B)	34
8.2.2 Transport via a dedicated television line	35
8.2.2.1 General	35
8.2.2.2 Transmission format for the dedicated line	35
8.3 Availability and repetition rate of the recording-control commands	37
9 Code of practice for broadcasters	38
9.1 Introduction	38
9.2 PDC in programme schedule planning	38
9.2.1 Programme guide	38
9.2.2 Programme labelling	38
9.2.2.1 Normal programmes	38
9.2.2.2 Non-programme items	39
9.2.2.3 Planned segmentation of a programme	39
9.2.2.4 Anticipated changes to schedule dependent upon future events	39

	9.2.2.5	Indicating end-of-transmission	39
	9.2.2.6	Network topology changes	39
	9.2.2.7	Daylight-saving time-changes	40
	9.2.2.8	Time zone	40
	9.2.2.9	Special uses of PDC labels	40
9.3		Rescheduled programmes - validity time windows of PIL and PTY labels	40
	9.3.1	Modification to programme guides and informing the user	41
	9.3.2	Programme labelling	41
	9.3.2.1	Programme cancellation	41
	9.3.2.2	Programme insertion	41
	9.3.2.3	Replacement programme	41
9.4		PDC in programme presentation and operation	42
	9.4.1	Transmission schedule	42
	9.4.2	Programme labelling	43
	9.4.2.1	Planned interruption	43
	9.4.2.2	Anticipated changes to schedule	43
	9.4.2.3	Other unforeseen events	44
9.5		System installation and evolution	44
9.6		General observations	45
	9.6.1	Product information	45
	9.6.2	Programme titles	45
	9.6.3	User priorities	45
	9.6.4	Selected programme list amendment	45
	9.6.5	Manual preselection operation	45
Annex A (informative):		The use of Unified Date and Time (UDT)	46
Annex B (informative):		Use of packet 8/30 format 1 in CCIR system B Teletext	47
Annex C (informative):		The use of DIDON III for the transport of the recording control commands	48
C.1		General	48
C.2		Error protection	48
C.3		Transmission format of programme delivery data group	49
Annex D (informative):		Interpretation of services codes at the PDC video recorder	50
Annex E (informative):		Some typical sequences of programme labels	52
E.1		Introduction	52
E.2		Data capacity requirement	52
E.3		Examples of programme sequences and the behaviour of VCRs	53
Annex F (informative):		Use of "random number" programme labels	78
Annex G (informative):		Bibliography	79
History		80

STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 231 E1:2003](https://standards.iteh.ai/catalog/standards/sist/47111fc2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/47111fc2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Joint Technical Committee (JTC) of the European Broadcasting Union (EBU), Comité Européen de Normalisation ELEctrotechnique (CENELEC) and the European Telecommunications Standards Institute (ETSI).

NOTE: The EBU/ETSI JTC was established in 1990 to co-ordinate the drafting of ETSs in the specific field of broadcasting and related fields. Since 1995 the JTC became a tripartite body by including in the Memorandum of Understanding also CENELEC, which is responsible for the standardization of radio and television receivers. The EBU is a professional association of broadcasting organisations whose work includes the co-ordination of its Members' activities in the technical, legal, programme-making and programme-exchange domains. The EBU has Active Members in about 60 countries in the European Broadcasting Area; its headquarters is in Geneva*.

* European Broadcasting Union
Case Postale 67
CH-1218 GRAND SACONNEX (Geneva)
Switzerland

Tel: +41 22 717 21 11

Fax: +41 22 717 24 81

Transposition dates	
Date of adoption of this ETS (doa):	05 July 1996
Date of latest announcement of this ETS (doa):	30 November 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 April 1997
Date of withdrawal of any conflicting National Standard (dow):	30 April 1997

Introduction

Programme Delivery Control (PDC) is a data broadcasting system which carries programme-related information for exploitation by suitably-equipped domestic video recorders. In its simplest application the programmes chosen by the viewer will be recorded by such recorders in their entirety, even if the transmission time is different from that published in the programme guide (for example owing to the overrun of a previous programme). More advanced applications may, for example, permit recording to be suspended and resumed in synchronism with breaks in programme transmission, such as may occur during a feature film in the event of film breakage.

The PDC system functions may be considered in two parts. Preselection functions deliver information about the programmes to the domestic recorder; this information may be carried via print media or via Teletext. In the latter case the user may make his selection of programmes by viewing the Teletext programme guide pages and, by the use of his remote-control, positions a cursor adjacent to the wanted programme. At the touch of a button he confirms his choice and the video recorder stores his requirement. If the video recorder does not incorporate full Teletext decoder functionality, the preselection information has to be keyed in manually, in the more conventional way. The Recording-control function depends on the establishment of a match between the viewer's preselection and a programme label transmitted by the broadcaster with each programme, thereby triggering the start and end of the recording process in synchronism with the actual transmission time of the programme.

The Programme Delivery Control (PDC) system specification is the result of several years of studies by the EBU in close collaboration with European industry. In accordance with the wishes of the European broadcasters, expressed in their replies to an EBU enquiry, the preselection and recording control functions of the PDC system have been designed mainly around the structure of CCIR Teletext system B.

The starting point for the development process was the Video Programming System (VPS) in the Federal Republic of Germany.

The system has been designed to be comprehensive in the facilities it offers, and applicable to the whole of Europe. It will accommodate all future requirements foreseen by the specialists involved, including those deriving from the expansion of international television services (e.g. direct broadcasting satellite services). Downwards compatibility is assured with systems already implemented and optional methods are provided for performing particular functions where the preferred methods are not appropriate.

To assure the long-term flexibility of the PDC system, the specialists recommend that where ITU-R Teletext system B is in operation new PDC services should provide both the recording control function and the programme preselection function by means of data carried in extension data packets. For recording control this approach offers the most efficient use of the resource represented by the vertical blanking interval of the television signal; for preselection it allows the Teletext editor greater freedom in the layout of Teletext programme guide pages. A further advantage is that all PDC data are acquired by a common process at the receiver.

Although the transport of preselection data by Teletext extension packets is preferred, it is nevertheless recommended that all decoders should also be able to process preselection data sent within the displayable Teletext page.

Where no a-priori restriction applies, the preferred method for sending recording control data is in ITU-R system B Teletext extension data packets of type 8/30 format 2. Other methods nonetheless remain in the present specification; where these concern services already implemented in certain countries they are considered in the main text, whilst others are considered in the annexes.

Experience with the services already implemented has highlighted the need for clear operational rules, and a Code of Practice for Broadcasters has been included to ensure that the intended response is obtained at the receiver. It will also be necessary to arrange for the orderly introduction of any new features (see note 1) which the system is potentially able to deliver, or any further enhancements, as they are specified. The specialists therefore plan to continue their collaboration with industry as the PDC system is implemented and introduced into service.

[SIST ETS 300 231 E1:2003](#)

NOTE 1: Further enhancements are under study. [https://www.etsi.org/standards/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003](#)

Considering that broadcasters may not only wish to modify programme schedules at short notice but also are required to generate and transmit the real-time commands to VCRs it is essential that both operations are under their close control.

NOTE 2: The term "PDC" is used here as a technical description of the system and follows the current ITU-R terminology. Trade names for services provided within the specification of PDC include VPS, VPT (Video Programming by Teletext) and Startext.

1 Scope

This European Telecommunication Standard (ETS) specifies the Programme Delivery Control (PDC) transmission system. PDC is a data broadcasting system which carries programme-related information for exploitation by suitably-equipped domestic video recorders. Not all the features specified need be implemented in a particular service. Some of the data is essential if a minimum level of functional performance is to be achieved, whilst other data may be provided only by broadcasters wishing to provide viewers with a higher level of PDC performance. Optional data may be sent at the broadcaster's discretion.

2 Normative reference

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 250 : "Television Systems; EBU/ETSI Joint Technical Committee (JTC); Specification of the D2-MAC/Packet system".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

Programme Delivery Control (PDC): Is a broadcasting service for domestic use which allows suitably-equipped recorders to record preselected programmes automatically and completely.

- PDC is made up of two distinct service components, defined as the preselection function and the recording-control function (see figure 1).

preselection function: For recording control of suitably-equipped recorders, this function performs the loading of the controller memory of the recorder with the information about all programmes required to be recorded. The viewer chooses the required programmes from television programme guides then enters the relevant information into the recorder, for example manually via a keyboard or bar-code reader, or interactively using a cursor on the display screen.

recording-control function: Allows remote control, from a source of transmission, of a recording made by a receiving equipment capable of preselecting the programme to be recorded. Such a function depends on the broadcaster sending a programme label in coded form together with the programme. In the case where no programme label is transmitted, the recording shall be done under timer-control.

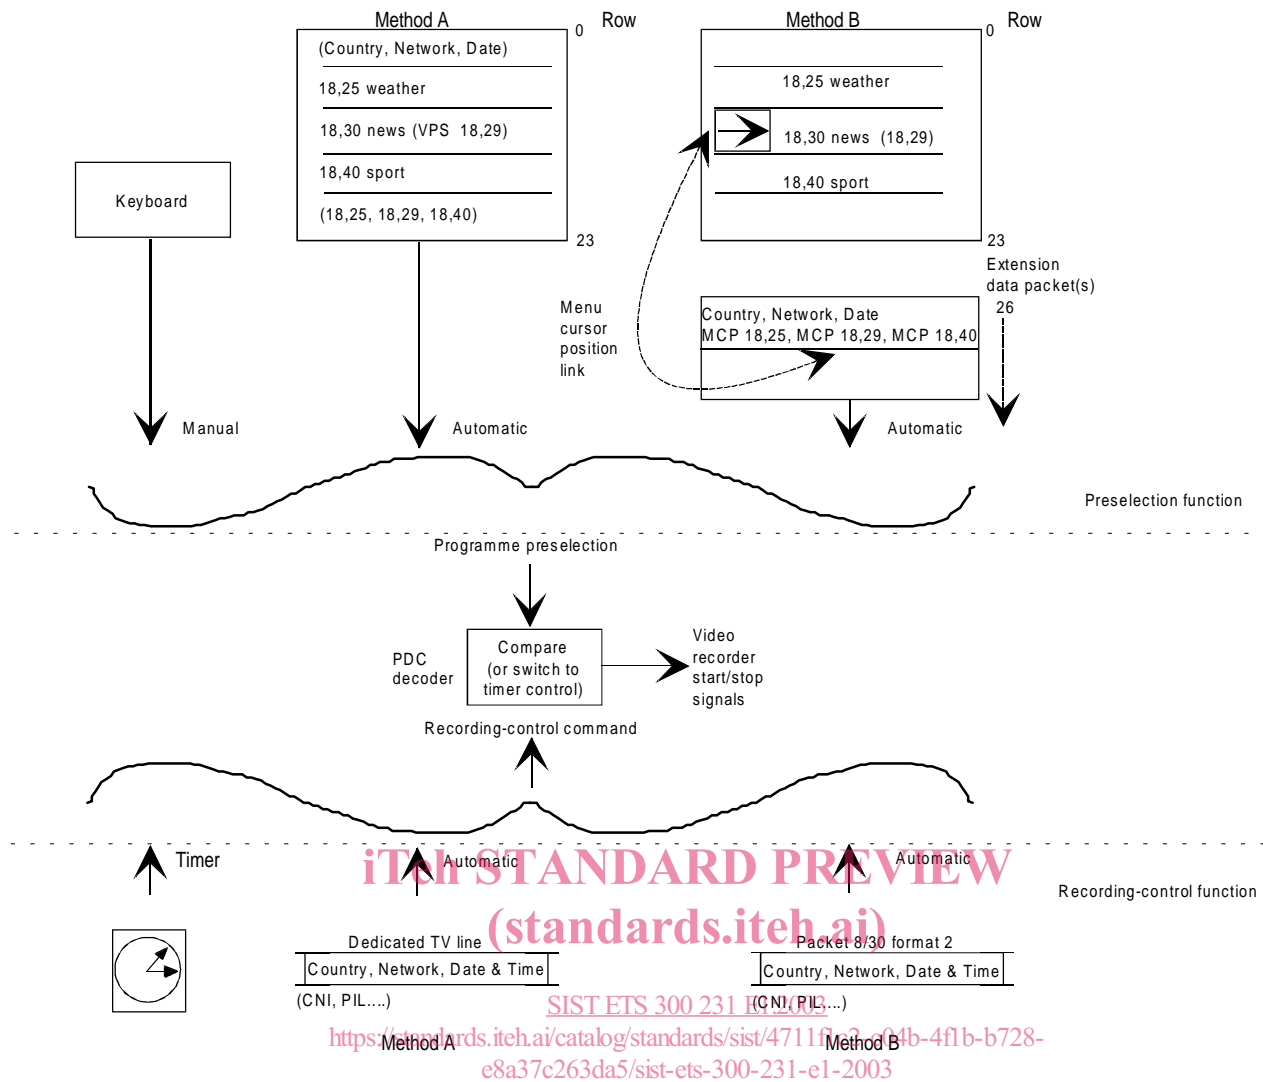


Figure 1

Preselection Method A is known as VPT, and it is described in subclause 7.3.1. Preselection Method B is known as PDC, and it is described in subclause 7.3.2.

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

AD	Announced Date
AT	Announced Time
BSDP	Broadcast Service Data Packet
CAF	Conditional Access Flag
CNI	Country and Network Identification
hexadecimal, or hex	A number system with base 16. In written form, equivalents of the decimal numbers 10 to 15 are replaced by the uppercase letters A to F
'XY	Values expressed in hexadecimal notation
INT	Interruption code
LCI	Label Channel Identifier
LDT	Local Date and Time
lsb	least significant bit
LTO	Local Time Offset
LUF	Label Update Flag
MCP	Menu Cursor Position
MI	Mode Identifier
MJD	Modified Julian Date
msb	most significant bit

NI	Network Identification
NSPV	No Specific PIL Value (PIL defined below)
PCS	Programme Control Status
PD	Programme Duration
PDC	domestic video Programme/Delivery Control system
PIL	Programme Identification Label
PRF	Prepare-to-Record Flag
PTL	Programme Title
PTY	Programme Type
PW	Protection Word
RI/T	Record Inhibit/Terminate
SPL	Short Programme Label
TC	Timer-control Code
UDT	Universal Date and Time
UTC	Co-ordinated Universal Time
VCR	Video Cassette Recorder
VPS	Video Programme System
VPT	Video Programming by Teletext

Other abbreviations and specialised terminology is noted where it occurs in the ETS.

4 Application of the PDC system

PDC is a data broadcasting system which carries programme-related information for exploitation by suitably-equipped domestic video recorders. In its simplest application the programmes chosen by the viewer will be recorded by such recorders in their entirety, even if the transmission time is different from that published in the programme guide (for example owing to the over-run of a previous programme). More advanced applications may, for example, permit recording to be suspended and resumed in synchronism with breaks in programme transmission, such as may occur during a feature film in the event of film breakage.

The PDC system functions may be considered in two parts, Preselection functions and Recording-control functions, see subclause 3.1.

<https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-7c7c7c7c7c7c>

It is recommended that where ITU-R Teletext system B is in operation new PDC services should provide both the recording control function and the programme preselection function by means of data carried in extension data packets.

Although the transport of preselection data by Teletext extension packets is preferred, it is recommended that all decoders should also be able to process preselection data sent within the displayable Teletext page.

Where no a-priori restriction applies, the preferred method for sending recording control data is in ITU-R system B Teletext extension data packets of type 8/30 format 2. Other methods are given in this ETS; where these other methods concern services already implemented in certain countries they are considered in the main text, whilst others are considered in the annexes.

5 The PDC service

- To enable the proper recording of programmes at times which differ from the published time of transmission (as is typical of flexible scheduling), including facilities for the recording of non pre-announced programmes;
- the recording of programmes by programme-type shall be possible;
- interruption of a transmitted programme for any reason may, at the discretion of the broadcaster, be accompanied by a corresponding interruption of the recording process;
- the presentation constraints on existing services (e.g. Teletext and television services) should be minimised;
- the service should allow both manual and automatic preselections;

- f) the service should be user-friendly;
- g) the service should be reliable. In the case of failure of the recording-control function, normal timer-control should operate;
- h) the rate of transmission of recording controls shall be such that error detection/correction schemes and frequency scanning by the receiver are possible (minimum repetition rate 1 Hz);
- i) the service should operate consistently regardless of time-zone boundaries and changes to and from daylight-saving time;

NOTE: CCIR Report 1078 proposes the use of Unified Date and Time for this purpose (see annex A).

- j) the start of the recording process should be close to the start of the required programme, however, in signalling the latter the broadcaster should make allowance for the varying "run-up" characteristics of recording equipment;
- k) the service should operate for programmes with and without conditional access;
- l) the data capacity needed for both the real-time (recording-control) function and the other background functions should be minimised;
- m) provision should be made for the announced date and time to be changed one or more times by the broadcaster without adverse effect on the service.

6 Programme identification

6.1 List of programme identification parameters

Each parameter listed hereafter defines a certain aspect of the programme identification function and is used subsequently in the preselection and recording-control functions as shown in table 1.

a) Country and Network Identification (CNI)

The CNI parameter is divided into two groups, one identifying the country, and one identifying the network or alternatively in some countries the programme provider. In this context a programme provider is the broadcaster who is responsible for the actual transmission of a programme.

b) Announced Date (AD)

The AD parameter gives the scheduled date of start of transmission of the programme in terms of years, months and days. When a local time reference is used the applicable local time offset should be made explicitly available (see note 1).

NOTE 1: If in particular implementations no use is made of Local Time Offset (LTO), and Co-ordinated Universal Time (UTC) is not presumed, normal operation is still possible where all services are based on a common time zone.

Table 1: Application of programme identification parameters in the programme preselection and programme recording control functions

Programme preselection	Programme recording control
CNI	CNI
AD	LCI
AT-2	PIL
MCP	
PTL	PCS
LTO	
AT-1	
PD	
PTY	PTY
CAF	UDT(see note)
	LUF
NOTE:	This parameter is carried, for example, in CCIR system B Teletext by data packet 8/30 format 1.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 231 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4711f1c2-c04b-4f1b-b728-e8a37c263da5/sist-ets-300-231-e1-2003>

c) Original Announced Time (AT-2)

The AT-2 parameter may be divided into two groups: the first indicates the announced starting time or where a programme schedule has been altered the original starting time; the second gives the announced finishing time. Both are expressed in hours and minutes. When a local time reference is used the applicable local time offset should be made explicitly available in both cases as it may change between the two (see note 2).

NOTE 2: If in particular implementations no use is made of LTO, and UTC is not presumed, normal operation is still possible where all services are based on a common time zone.

d) Menu Cursor Position (MCP)

The MCP parameter is used to link parameters to text information.

e) Programme Identification Label (PIL)

The PIL parameter normally carries the local announced broadcast time (day, month, hour, minute) identifying the transmitted programme. Several special values, known as "service codes", are reserved for receiver control in certain conditions.

f) Programme Title (PTL)

The PTL parameter provides the programme title in clear text.

g) Local Time Offset (LTO)

The LTO parameter indicates the local time offset from UTC to LDT in 1/4 hour steps (LTO = LDT - UTC). More than one of this parameter may need to be sent to cover discontinuities in local time.

h) Announced Time (AT-1)

The AT-1 parameter may be divided in two groups: the first indicates the announced starting time; the second gives the announced finishing time. Both are expressed in hours and minutes. When a local time reference is used the applicable local time offset should be made explicitly available in both cases as it may change between the two (see note 3).

NOTE 3: If in particular implementations no use is made of LTO, and UTC is not presumed, normal operation is still possible where all services are based on a common time zone.

i) Programme Duration (PD)

The PD parameter shows the expected duration of the programme in hours, minutes and seconds.

j) Programme Control Status (PCS)

The PCS parameter is used to state real-time conditions which are relevant to the programme or its broadcasting (e.g. type of sound transmission, rating of programme, access mode, etc.).

k) Programme Type (PTY)

The PTY parameter identifies the type or series of programme being broadcast and allows for selective recording of certain types of programme independent of the PILs.

l) Controlled Access Flag (CAF)

The CAF parameter is used during the preselection process to signal that the programme to which it refers is not for free access.

m) Unified Date and Time (UDT)

The UDT parameter is used for broadcasting the Co-ordinated Universal Time (UTC) and Modified Julian Date (MJD).

n) Label Update Flag (LUF)

The LUF parameter is used to signal that the associated CNI and PIL do not relate to the current television programme, but are intended to update the label memories in video recorders. This provides a method of signalling that the programme which is ending its transmission on a particular channel, is being transferred, perhaps after a period of interruption, to another channel. It may also provide a new label for a programme which is postponed beyond the end of the time window of validity of its original label (see note 4).

NOTE 4: No mechanism is provided to update programme duration information held by the VCR when postponement or channel swapping functions are used.

o) Label Channel Identifier (LCI)

The LCI parameter indicates to which of the four parallel data channels the associated label applies. This permits the simultaneous labelling of a broadcast in several ways, and allows for the impending start of a new programme to be signalled before the end of the current one.

p) Mode Identifier (MI)

The MI parameter is used to indicate which of two possible recording control function options has been selected by the broadcaster. Essentially, this determines whether the recorder stops immediately or continues for 30 seconds after a label change.

q) Prepare-to-Record Flag (PRF)

The PRF is used to signal the precise start of the programme.

6.2 Coding of the parameters

The parameters listed in subclause 6.1 can be regarded as data fields. The data-field length and structure is given hereafter, taking into account that bit b_1 of a data field is the first bit transmitted. Unless otherwise specified, a parameter transmitted with all bits set to logical "1" should be regarded as carrying irrelevant information.

a) Country and Network Identification (CNI - 16 bits)

This field is composed of two groups of data bits. A first group, b_1 to b_8 , identifies the country (see note 1 and table 4), the second group b_9 to b_{16} identifies the network or alternatively in some countries the programme provider within the defined country. The allocation of these codes is left to national authorities.

NOTE 1: As a national option in countries using the dedicated television line method of transport, only the last four bits of the group define the country. Bits b_1 to b_4 of this field are used for enhancements to Video Programme System (VPS).

b) Announced Date (AD - $m \times 9$ bits)

This field is composed of m bytes, which could be either displayable Teletext characters, or encoded information yet to be defined. When local time is used, the relevant LTO should be provided. In the absence of an LTO, UTC is presumed (see note 2).

NOTE 2: If in particular implementations no use is made of LTO, and UTC is not presumed, normal operation is still possible where all services are based on a common time zone.