

INTERNATIONAL STANDARD

IEC 61811-55

QC 160505

Second edition
2002-03

Electromechanical all-or-nothing relays –

Part 55:

**Blank detail specification –
Electromechanical all-or-nothing telecom
relays of assessed quality –
Two change-over contacts,
11 mm × 7,5 mm (max.) base**

Relais électromécaniques de tout-ou-rien –

Partie 55:

*Spécification particulière cadre –
Relais électromécaniques de tout-ou-rien télécom
soumis au régime d'assurance de la qualité –
Deux contacts à deux directions,
surface d'encombrement de 11 mm × 7,5 mm (max.)*



Reference number
IEC 61811-55:2002(E)

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- **IEC Web Site** (www.iec.ch)

- **Catalogue of IEC publications**

The on-line catalogue on the IEC web site (www.iec.ch/catlg-e.htm) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- **IEC Just Published**

This summary of recently issued publications (www.iec.ch/JP.htm) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- **Customer Service Centre**

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC 61811-55

QC 160505

Second edition
2002-03

Electromechanical all-or-nothing relays –

Part 55:

**Blank detail specification –
Electromechanical all-or-nothing telecom
relays of assessed quality –
Two change-over contacts,
11 mm × 7,5 mm (max.) base**

Relais électromécaniques de tout-ou-rien –

Partie 55:

*Spécification particulière cadre –
Relais électromécaniques de tout-ou-rien télécom
soumis au régime d'assurance de la qualité –
Deux contacts à deux directions,
surface d'encombrement de 11 mm × 7,5 mm (max.)*

© IEC 2002 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

U

For price, see current catalogue

CONTENTS

FOREWORD.....	3
1 General.....	5
1.1 Scope.....	5
1.2 Normative references.....	5
1.3 Front page of detail specification.....	7
2 Characteristic values of the relay.....	9
2.1 General data.....	9
2.2 Construction of IECQ type designation (ordering information).....	9
2.3 Coil data.....	10
2.4 Contact data.....	10
2.5 Mounting.....	11
2.6 Environmental data.....	11
2.7 Package of relays for automatic handling (if applicable).....	12
3 Qualification approval procedures.....	12
4 Quality conformance inspection.....	12
4.1 Formation of inspection lots.....	12
4.2 Intervals between tests.....	12
5 Marking and documentation.....	12
5.1 Marking of the relay.....	12
5.2 Marking of the package.....	13
5.3 Documentation.....	13
6 Annexes.....	13
7 Tests.....	13
7.1 Standard conditions for testing.....	13
7.2 Mounting of test specimens during the test.....	13
7.3 General conditions for testing.....	13
8 Ordering information.....	13
9 Relay reliability – Failure rate data (optional).....	13
Table 1 – Dielectric test voltages.....	9
Table 2 – Coil data.....	10
Table 3 – Loads, contact-circuit resistance limits, switching cycles and frequencies for electrical endurance and overload tests.....	10
Table 4 – Quality conformance inspection.....	14-26
Table 5 – Qualification approval.....	28-30
Table 6 – Industrial qualification.....	30

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTROMECHANICAL ALL-OR-NOTHING RELAYS –**Part 55: Blank detail specification –
Electromechanical all-or-nothing telecom relays of assessed quality –
Two change-over contacts, 11 mm × 7,5 mm (max.) base**

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.
- 6) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. The IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61811-55 has been prepared by IEC technical committee 94: All-or-nothing electrical relays.

This second edition of IEC 61811-55 cancels and replaces IEC/PAS 61811-55 published in 2000 and constitutes a technical revision.

The text of this standard is based on the following documents:

FDIS	Report on voting
94/149/FDIS	94/163/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The QC number that appears on the front cover of this publication is the specification number in the IEC Quality Assessment System for Electronic Components (IECQ).

This publication has been drafted in accordance with the ISO/IEC Directives, Part 3.

The committee has decided that the contents of this publication will remain unchanged until 2007. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

The contents of the corrigendum of June 2002 have been included in this copy.

Withdrawing

iTech Standards
(<https://standards.iteh.ai>)
Document Preview

IEC 61811-55:2002

<https://standards.iteh.ai/catalog/standards/iec/33/bd4593-ed48-414d-86c2-c90305435ad3/iec-61811-55-2002>

ELECTROMECHANICAL ALL-OR-NOTHING RELAYS –

Part 55: Blank detail specification – Electromechanical all-or-nothing telecom relays of assessed quality – Two change-over contacts, 11 mm × 7,5 mm (max.) base

1 General

1.1 Scope

This part of IEC 61811 is a blank detail specification applicable to electromechanical all-or-nothing telecom relays of assessed quality. Relays according to this standard are provided for the operation in telecommunication applications. However, as electromechanical all-or-nothing relays, they are also suitable for particular industrial and other applications.

This standard selects from IEC 61810-7 and other sources the appropriate methods of test to be used in detail specifications derived from this specification, and contains basic test schedules to be used in the preparation of such specifications in accordance with IEC 61811-1.

Detailed test schedules are contained in the detail specifications supplementary to this specification.

1.2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60068-2-17:1994, *Environmental testing – Part 2: Tests: Test Q: Sealing*

IEC 60068-2-20:1979, *Environmental testing – Part 2: Tests: Test T: Soldering*
Amendment 2 (1987)

IEC 60068-2-47:1999, *Environmental testing – Part 2-47: Test methods – Mounting of components, equipment and other articles for vibration, impact and similar dynamic tests*

IEC 60255-14:1981, *Electrical relays – Part 14: Endurance test for electrical relay contacts – Preferred values for contact loads*

IEC 60695-2-2:1991, *Fire hazard testing – Part 2: Test methods – Section 2: Needle-flame test*

IEC 61709:1996, *Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion*

IEC 61810-7:1997, *Electromechanical all-or-nothing relays – Part 7: Test and measurement procedures*

IEC 61811-1:1999, *Electromechanical non-specified time all-or-nothing relays of assessed quality – Part 1: Generic specification*

IEC 61811-50:2002, *Electromechanical all-or-nothing relays – Part 50: Sectional specification – Electromechanical all-or-nothing telecom relays of assessed quality*

QC 001002-2, *Rules of Procedure of the IEC Quality Assessment System for Electronic Components (IECQ) – Part 2: Documentation*

QC 001002-3, *Rules of Procedure of the IEC Quality Assessment System for Electronic Components (IECQ) – Part 3: Approval procedures*

QC 001005, *Register of Firms, Products and Services approved under the IECQ System, including ISO 9000*


CECC 00802:1990, *Guidance document: CECC Standard Method for the Specification of Surface Mounting Components (SMDs) of Assessed Quality*

(National authorized institutions will complete this clause by making reference to any documents or specifications directly referred to in their national equivalent of this standard.)

iteh standards
(<https://standards.iteh.ai>)
Document Preview


<https://standards.iteh.ai/standards/iec/32/bd4593-ed48-414d-86c2-c90305435ad3/iec-61811-55-2002>

<https://standards.iteh.ai/standards/iec/32/bd4593-ed48-414d-86c2-c90305435ad3/iec-61811-55-2002>

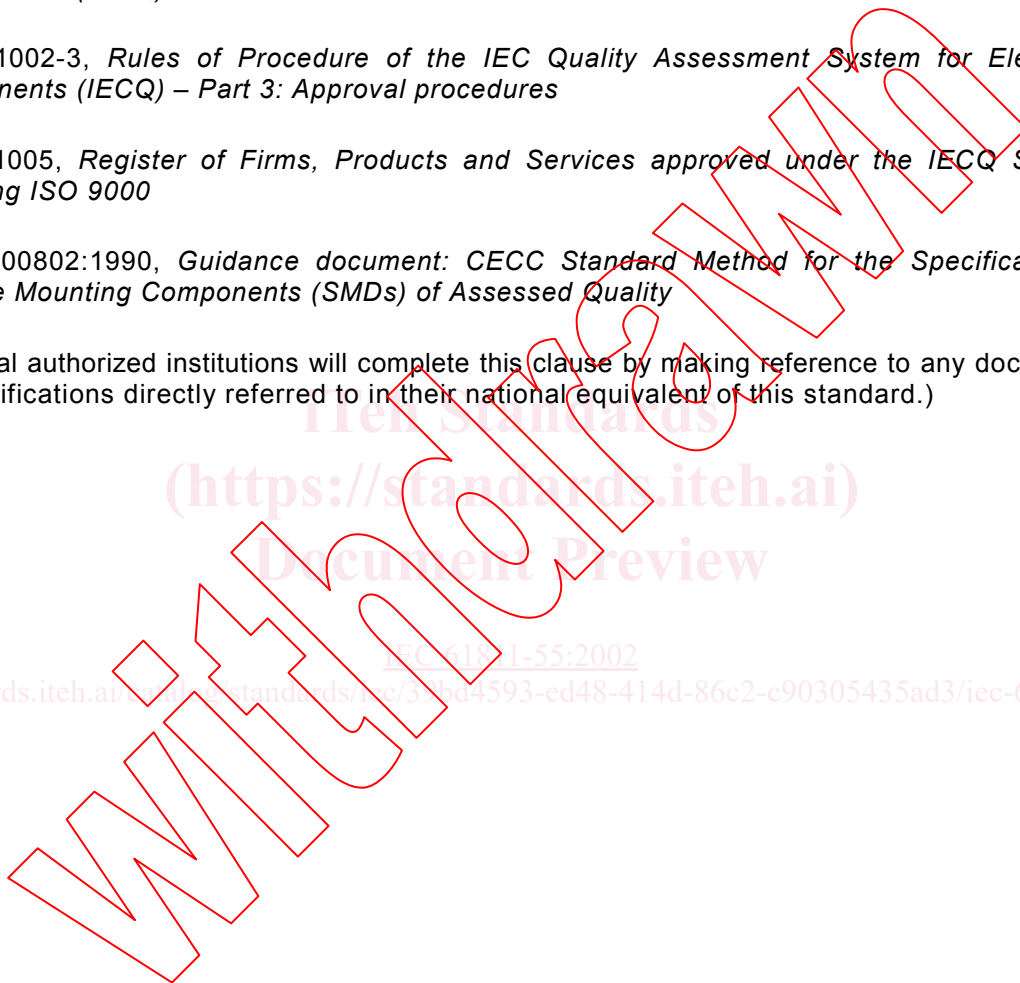

1.3 Front page of detail specification

The layout of the front page of the detail specification is as follows.

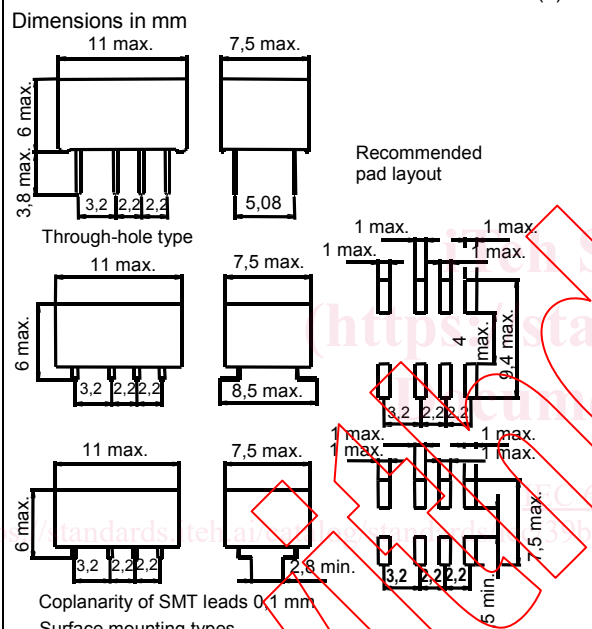(1)	QC xxxxxx Issue: Page 1 of	(3)	(4)
Electronic components of assessed quality in accordance with: IEC 61810-7:1997 IEC 61811-1:1999 IEC 61811-50:2002			
Detail specification for electromechanical all-or-nothing telecom relays of assessed quality, two change-over contacts, with 11 mm × 7,5 mm (max.) base			
Type: two change-over contacts		(5)	
Construction: dual-in-line, with 11 mm × 7,5 mm (max.) base, overall height of 6 mm max. plastic sealed case for assembling techniques of printed circuit boards using mounting holes and soldering or for surface mounting technology (as applicable)		(6)	
<p>(7)</p> <p>Dimensions in mm</p>  <p>Through-hole type</p> <p>Coplanarity of SMT leads 0,1 mm</p> <p>Surface mounting types</p> <p>Monostable (De-energized condition)</p> <p>Latching (Reset condition)</p> <p>Wiring diagram – Bottom view</p> <p>IEC 631/02</p> <p>NOTE Drawings are examples; the maximum outer dimensions, the wiring diagram of coil relay, the terminal arrangement and the same orientation of all rectangular terminals are mandatory.</p>		<p>(8)</p> <p>Application:</p> <p>Relays according to this standard are provided for the operation in telecommunication applications. However, as printed circuit board relays, they are suitable also for control or switching functions in particular industrial and other applications.</p>	
Coil data		(9)	
Rated voltages: 1,5 ... 12 V d.c.			
Rated power: 140 / 100 mW			
Contact data		(10)	
Change-over break-before-make contacts			
Rated contact voltage: 120 V d.c. / 125 V a.c.			
Rated contact current: 1 A max			
Rated contact power: 30 W / 30 VA			
Limiting continuous current: 1 A max			
Component climatic category according to IEC 60068-1:		(11)	
Temperature range		25/70/21	
- operating ambient temperature:		-25 °C to +70 °C	
- storage temperature:		-40 °C to +85 °C	
Information about manufacturers who have components qualified according to this detail specification is available in the current QC 001005.			

Key to front page

The numbers between brackets of the front page correspond to the following indications which should be given.

Identification of the detail specification

- (1) The name of the national standards organization under whose authority the detail specification is published and, if applicable, the organization from which the detail specification is available.
- (2) The IECQ symbol and the number allotted to the completed detail specification by the IECQ secretariat.
- (3) The number and the year of availability of the IEC standard concerning test and measurement procedures for electromechanical all-or-nothing relays and/or sectional specification; also national reference, if different.
- (4) If different from the IECQ number, the national number of the detail specification, date of issue and any further information required by the national system, together with any amendment numbers.

Identification of the relay

- (5) Type: monostable or bistable, non-polarized or polarized, two change-over contacts.
- (6) Construction: sizes, for example dual-in-line, base and overall height, type of relay, based upon environmental protection (RT III), mounting variants and other typical construction details.
- (7) An outline drawing with main dimensions, which are of importance for interchangeability, and/or reference to the appropriate national or international document for outlines. Alternatively, this drawing may be given in an annex to the detail specification, but (7) should always contain an illustration of the general outer appearance of the component.

Location and dimensions of stand-offs (maximum relay height shall include stand-offs), position of terminal No. 1 relative to the outside shape, acceptable offset of the tip of a terminal relative to the nominal grid position, indication of the area on the top of the relay housing to enable automatic mounting using aspirators, suitable hole diameter for assembling on printed circuit board.

- (8) Typical field of applications.
- (9) Available rated coil voltages and rated power.
- (10) Available contact arrangements, defined special contact materials and contact voltage, current and power. The respective code digit for contact materials shall be listed in an annex, if applicable.
- (11) Component climatic category according to clause 8 and annex A of IEC 60068-1, and temperature range.

2 Characteristic values of the relay


2.1 General data

- Thermal resistance: max. ... K/W
- Contact application: CA 0, CA 1, and CA 2
- Relay mass: max. ... g
- Finish of the terminals: presoldering; admissible non-presoldered part: max. 1 mm to the stand-off plane, if applicable
- Insulation resistance: 1 000 M Ω min. at 500 V d.c. initial value
2 M Ω min. at 500 V d.c. after tests
- Dielectric strength: see table 1

Table 1 – Dielectric test voltages

	Dielectric test V a.c. min.	Impulse voltage test V min. – pulse shape
Opened contact circuits	750	1 500 – 10/700 μ s
Between adjacent contact circuits	1 000	1 500 – 10/700 μ s
Coil to contact circuits	1 500	2 500 – 1,2/50 μ s

2.2 Construction of IECQ type designation (ordering information)

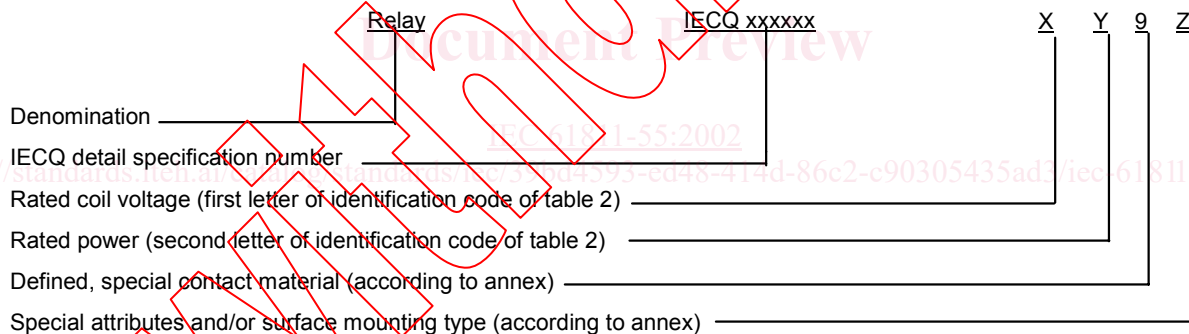

The coding of the monostable or bistable relay type shall be combined with the rated power of the coil, if applicable. The reference to two change-over contacts shall be given on the front page of the specification.

Use code 0 as the last digit if no special attributes apply. If one of the attributes in the example for a detail specification shall not be considered, the corresponding code number or letter shall be deleted; there shall be no special marks or open space for non-applicable attributes.

The manufacturer may use his own numbering system, provided that a conversion list with the IECQ type designations and the manufacturer's part numbers is given in an annex to the detail specification.