



Designation: **F2670–17** **F2670 – 18**

Standard Consumer Safety Specification for Infant Bath Tubs¹

This standard is issued under the fixed designation F2670; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

This consumer safety specification is intended to address certain incidents associated with the use of infant bath tubs. The U.S. Consumer Product Safety Commission (CPSC) identified drowning incidents which generally involved infant bath tubs being used in adult tubs containing water and left unattended by their caregiver. The CPSC also identified non-fatal incidents related to collapsing of infant bath tubs.

This consumer safety specification is also intended to address certain incidents associated with the use of infant bath tub accessories. The U.S. Consumer Product Safety Commission (CPSC) identified drowning incidents with accessories being used in or on infant bath tubs. The CPSC also identified non-fatal incidents related to collapse and structural failure of infant bath tub accessories.

This consumer safety specification does not address incidents in which infant bath tubs and infant bath tub accessories are unreasonably misused, are used in a careless manner that disregards the warnings and instructions that are provided with each product, or those instances where the caregiver leaves the infant unattended in the product.

This consumer safety specification is written within the current state-of-the-art product technology. It is intended that this consumer safety specification will be updated whenever substantive information becomes available and known to ASTM which necessitates additional requirements or justifies the revision of existing requirements.

1. Scope

1.1 This consumer safety specification establishes performance requirements, test methods, and labeling requirements to promote the safe use of infant bath tubs. ~~Specifically excluded from the scope of this standard are products commonly known as bath slings, typically made of fabric or mesh.~~ It also covers slings, pads, inserts and similar accessories when such accessories are used with the infant bath tub.

1.2 This consumer safety specification is intended to reduce the risk of death and minimize injury to infants resulting from use and reasonably foreseeable abuse of infant bath tubs, ~~tubs and infant bath tub accessories.~~

1.3 No infant bath tub or infant bath tub accessory produced after the approval date of this consumer safety specification shall, either by label or other means, indicate compliance with this specification unless it conforms to all requirements contained herein.

1.4 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.5 The following precautionary caveat pertains only to the test methods portion, Section 7, of this consumer safety specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and ~~health~~ environmental practices and determine the applicability of regulatory limitations prior to use.*

1.6 This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.

¹ This consumer safety specification is under the jurisdiction of ASTM Committee F15 on Consumer Products and is the direct responsibility of Subcommittee F15.20 on Bath Seats.

Current edition approved Jan. 1, 2017/March 1, 2018, Published January 2017/March 2018. Originally approved in 2009. Last previous edition approved in 2016/2017 as F2670–16a/F2670–17. DOI: 10.1520/F2670-17-10.1520/F2670-18.

2. Referenced Documents

2.1 ASTM Standards:²

[D1683/D1683M Test Method for Failure in Sewn Seams of Woven Fabrics](#)

[D3359 Test Methods for Rating Adhesion by Tape Test](#)

[F963 Consumer Safety Specification for Toy Safety](#)

2.2 Federal Standards:³

[16 CFR 1303 Ban of Lead-Containing Paint and Certain Consumer Products Bearing Lead Containing Paint](#)

[16 CFR 1500 Federal Hazardous Substances Act Regulations](#)

[16 CFR 1500.48 Technical Requirements for Determining a Sharp Point in Toys and Other Articles Intended for Use by Children Under 8 Years of Age](#)

[16 CFR 1500.49 Technical Requirements for Determining a Sharp Metal or Glass Edge in Toys and Other Articles Intended for Use by Children Under 8 Years of Age](#)

~~[16 CFR 1500.50 Test Methods for Simulating Use and Abuse of Toys and Other Articles Intended for Use by Children](#)~~

~~[16 CFR 1500.51 Test Methods for Simulating Use and Abuse of Toys and Other Articles Intended for Use by Children 18 Months of Age or Less](#)~~

[16 CFR 1501 Method for Identifying Toys and Other Articles Intended for Use by Children Under 3 Years of Age Which Present Choking, Aspiration, or Ingestion Hazards Because of Small Parts](#)

[Consumer Product Safety Improvement Act](#)

2.3 ANSI Standard:

[ANSI Z535.4 Standard for Product Safety Signs and Labels](#)

[ANSI Z535.6 Product Safety Information in Product Manuals, Instructions, and Other Collateral Materials](#)

3. Terminology

3.1 Definitions of Terms Specific to This Standard:

3.1.1 *conspicuous, adj*—~~label position so that the label is visible~~, when the occupant is in the product and the product is in any manufacturer's recommended use position(s), to a person standing near the product at any one position around the product, but not necessarily visible from all positions.

3.1.2 *double action release system, n*—a mechanism requiring either two consecutive actions, the first of which must be maintained while the second is carried out, or two separate and independent simultaneous actions to fully release.

3.1.3 *fabric, n*—any woven, knit, coated, laminated, extruded or calendered flexible material that is intended to be assembled using a seam.

3.1.4 *infant bath tub, n*—tub, enclosure, or other similar product intended to hold water and be placed into an adult bath tub, sink, or on top of other surfaces to provide support or containment, or both, for an infant in a reclining, sitting, or standing position during bathing by a caregiver.

3.1.5 *infant bath tub accessory, n*—component or product sold with an infant bath tub or sold separately and that is intended to be attached to or placed on or in an infant bath tub for the purpose of supporting an infant during bathing by an adult caregiver.

3.1.5.1 Discussion—

Such component or product may also be intended for use separately as a standalone product, but that use mode is not covered by this consumer safety specification. Other components or products not intended to support an infant while being bathed (for example, soap or towel holder, water pump, shower handle, etc.) are excluded from this definition.

3.1.6 *locking or latching mechanism, n*—method of preventing an infant bath tub from folding or collapsing during use.

3.1.7 *manufacturer's recommended use position(s), n*—any position that is presented as a normal, allowable, or acceptable configuration for the use of the product by the manufacturer in any descriptive or instructional literature.

3.1.7.1 Discussion—

This specifically excludes positions which the manufacturer shows in a like manner in its literature to be unacceptable, unsafe, or not recommended.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401, <http://www.access.gpo.gov>.

3.1.8 *nonpaper label, n*—any label material, such as plastic or metal, that either will not tear without the aid of tools or tears leaving a sharply defined edge or labels made of fabric.

3.1.9 *occupant, n*—~~infant that individual who is in an infant bath tub in one of the or an infant bath tub accessory in any manufacturer’s recommended use positions:position(s).~~

3.1.10 *paper label, n*—any label material that tears without the aid of tools and leaves a fibrous edge.

3.1.11 *principal display panel, n*—that part of the product’s package that is most likely to be displayed, presented, shown or examined under normal or customary conditions of display for retail sale.

3.1.12 *product, n*—when used in this standard, means that requirements apply to both an infant bath tub and an infant bath tub accessory.

3.1.13 *protective component, n*—any component used for protection from sharp edges, points, or entrapment of fingers or toes.

3.1.13.1 *Discussion*—

Examples of protective components include caps, sleeves, and plugs.

3.1.14 *seam, n*—means of joining fabric components such as sewing, welding, heat sealing, or gluing.

3.1.15 *smooth test surface, n*—any rigid plastic, metal, or porcelain surface to which the suction cups can adhere, and that is at least 2 in. (51 mm) larger in all directions than the largest dimensions of the suction cup attachment device on the infant bath tub.

3.1.16 *static load, n*—vertically downward load applied by weights or other means.

4. Calibration and Standardization

4.1 Unless otherwise noted, the ~~infant bath tub product~~ shall be completely assembled in accordance with the manufacturer’s instructions.

4.2 The product to be tested shall be in a room with an ambient temperature of $73 \pm 9^\circ\text{F}$ ($23 \pm 5^\circ\text{C}$) for at least 1 h prior to testing. Testing then shall be conducted within this temperature range.

4.3 All testing required by this consumer safety specification shall be conducted on the same product ~~sample-sample~~, unless otherwise specified.

5. General Requirements

5.1 *Hazardous Sharp Edges or Points*—There shall be no hazardous sharp points or edges as defined in 16 CFR 1500.48 and 16 CFR 1500.49 before or after the product has been tested to this consumer safety specification.

5.2 *Small Parts*—There shall be no small parts as defined in 16 CFR 1501 before testing or liberated as a result of testing to this consumer safety specification.

5.3 *Lead in Paints*—All paint and surface coatings on the product shall comply with the requirements of 16 CFR 1303.

5.4 *Resistance to Collapse*—~~*Collapse:* Latching or locking mechanisms designed to prevent the unintentional collapse of the product with the infant in it shall comply with the following requirements when properly placed in any manufacturer’s recommended use position(s):~~

5.4.1 When the product is placed in any manufacturer’s recommended use position(s), latching and locking mechanisms designed to prevent the unintentional collapse of the product with the infant in it shall comply with either 5.4.1.1 or 5.4.1.2.

NOTE 1—An attachment (such as a hook) where the weight of the child maintains the engagement is not considered a latching and locking mechanism.

5.4.1.1 Product shall be designed with a single action mechanism that shall not release when tested in accordance with 7.1.1.

5.4.1.2 Product shall be designed with a double action release system. There are no force requirements for a double action release system.

5.4.2 During and upon completion of the test in accordance with 7.4, the ~~product-infant bath tub~~ shall remain in the manufacturer’s recommended use position(s), and the latching ~~or~~ and locking ~~mechanism~~ mechanism(s) shall remain engaged and operative after testing.

5.4.3 ~~For all single action mechanisms, the mechanism shall not release when tested~~ During and upon completion of the test in accordance with 7.1-7.4.1-, 7.6.1, and 7.6.2, the infant bath tub accessory shall remain in the manufacturer’s recommended use position(s), and the latching and locking mechanism(s) shall remain engaged and operative after testing.

~~5.4.3 All double action mechanisms shall require two distinct and separate actions for release of the mechanism:~~

5.4.4 ~~The mechanism~~ Latching and locking mechanism(s) shall also comply with the requirements of this section after cycling has been conducted in accordance with 7.1.2.

5.5 *Scissoring, Shearing, and Pinching*—The product, when in the manufacturer’s recommended use position(s), shall be designed and constructed to prevent injury to the occupant from any scissoring, shearing, or pinching when members or components rotate about a common axis or fastening point, slide, pivot, fold or otherwise move relative to one another. Scissoring, shearing, or pinching that may cause injury exists when the edges of the rigid parts admit a probe greater than 0.210 in. (5.33 mm) and less than 0.375 in. (9.53 mm) at any accessible point throughout the range of motion of such parts.

5.6 *Openings*—Holes or slots that extend entirely through a wall section of any rigid material less than 0.375 in. (9.53 mm) thick and admit a 0.210-in. (5.33 mm) diameter rod shall also admit a 0.375 in. (9.53 mm) diameter rod. Holes or slots that are between 0.210 in. (5.33 mm) and 0.375 in. (9.53 mm) and have a wall thickness less than 0.375 in. (9.53 mm) but are limited in depth to 0.375 in. (9.53 mm) maximum by another rigid surface shall be permissible (see Fig. 1 for examples). The product shall be evaluated in all manufacturer’s recommended use positions.

5.7 *Protective Components*—If at the child can grasp any protective components between the thumb and forefinger, or teeth, such as caps, sleeves, or plugs used for protection from sharp edges, points, or entrapment of fingers or toes, or or if there is at least a 0.040-in. (1.00-mm) gap between the component and its adjacent parent component when the product—infant bath tub with and without any accessories (if applicable) is in its manufacturer’s recommended use position(s), such component shall not be removed when tested in accordance with 7.2.

5.8 *Requirements for Toys*—Toy accessories attached to, removable from, or sold with infant bath tubs, either infant bath tubs or infant bath tub accessories, or both, as well as their means of attachment, must shall meet applicable requirements of Consumer Safety Specification F963.

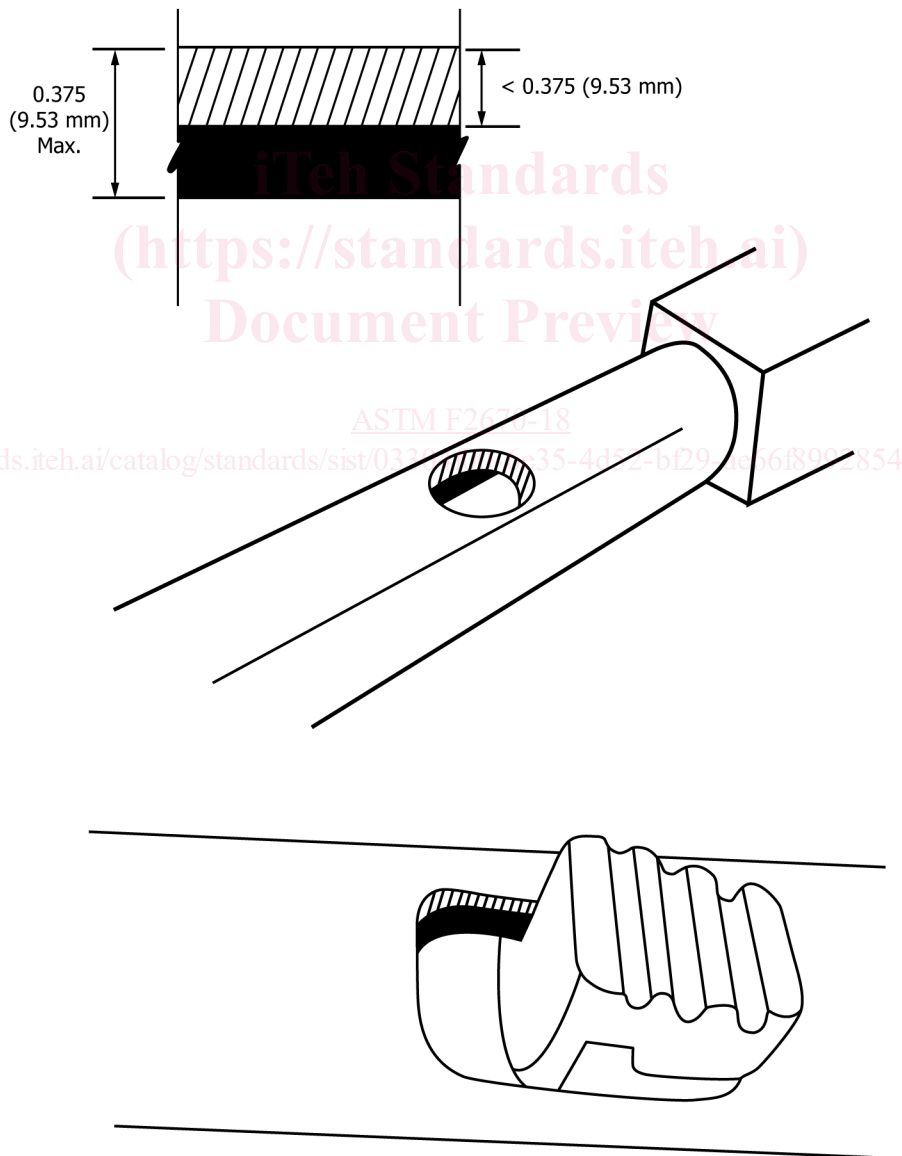


FIG. 1 Opening Examples

5.9 Labeling:

5.9.1 Warning labels, whether paper or nonpaper, shall be permanent when tested in accordance with 7.3.1 – 7.3.4.

5.9.2 Warning statements applied directly onto the surface of the product by hot stamping, heat transfer, printing, wood burning, etc. shall be permanent when tested in accordance with 7.3.1 and 7.3.5.

5.9.3 Nonpaper labels shall not liberate small parts when tested in accordance with 7.3.6.

5.10 Compliance of Multi-use Products—For an infant bath tub accessory that is also intended to be used separately as a standalone product covered under the scope of another ASTM or other standard, it shall also comply with the applicable requirements of that standard.

5.11 Infant bath tubs and infant bath tub accessories must comply with the applicable requirements of the Consumer Product Safety Improvement Act.

6. Performance Requirements

6.1 Restraint System—~~Infant bath tubs~~ Products may have a permanent or removable passive crotch restraint as part of their design. They shall not have any additional restraint system(s) which requires action on the part of the caregiver to secure or release the restraint.

6.2 Static Load—The ~~product~~ infant bath tub shall not break, become permanently deformed or damaged, or fail to comply with any of the other requirements of this consumer safety specification when tested in accordance with 7.4.

6.3 Specific Requirements for Suction Cups—Infant bath tubs that utilize individual suction cups as a method of attachment to a surface shall comply with the following requirements:

6.3.1 Each suction cup shall remain attached to the product and shall not become damaged or broken after testing in accordance with 7.5.1.

6.3.2 The product shall remain attached to the test surface and shall not become damaged or broken after testing in accordance with 7.5.2.

6.4 Structural Integrity/Attachment of Infant Bath Tub Accessories:

6.4.1 Tests required in this section for static and dynamic load shall be conducted in the sequence listed and using the same tub sample as in 6.2, unless the tub sample is damaged beyond use during testing, in which case a new tub sample shall be used to complete the testing.

6.4.2 Testing shall be conducted in each of the manufacturer's recommended use position(s) and for each separate mode of use recommended for the accessory.

6.4.3 Static and Dynamic Load—Accessories shall not allow any of the following conditions after being tested in accordance with 7.4.1 and 7.6.1 for static load and 7.6.2 for dynamic load:

6.4.3.1 Any parts of the accessory to become separated from it,

6.4.3.2 Any permanent damage,

6.4.3.3 The accessory to collapse or any attachment point to disengage from (no longer be in contact with) the infant bath tub,

6.4.3.4 A change in adjustment that causes the infant bath tub accessory to not fully support the occupant,

6.4.3.5 The creation of a hazardous condition as defined in Section 5.

6.4.4 Fabric/Mesh Integrity of Accessories—Accessories shall meet the requirements of 6.4.4.1 and 6.4.4.2. At the conclusion of testing required by 6.4.4.1 and 6.4.4.2, there shall be no failure of seams, breakage of material, or change in adjustment that causes the infant bath tub accessory to not fully support the occupant or to create a hazardous condition as defined in Section 5.

6.4.4.1 Seam Strength of Accessories—All seams supporting the weight of the occupant, when tested in accordance with Test Method **D1683/D1683M**, shall have a breaking strength of 30 lbf (134 N) or greater.

6.4.4.2 Mesh/Fabric Attachment Strength of Accessories—When tested in accordance with 7.7, all locations on the accessory where a mesh or fabric assembly is mechanically fastened to a rigid structural element (for example, fastening of the assembly to a wire frame) shall not disengage or detach.

7. Test Methods

7.1 Latching ~~or~~ Locking Mechanism: Mechanism(s):

7.1.1 Single Action Release Mechanism—With the product in each manufacturer's recommended use position, gradually apply a 10-lbf (45-N) force to the ~~locking or latching~~ latching and locking mechanism(s) in the direction tending to release it.

7.1.2 Latching ~~or~~ Locking Mechanism Durability—The latching ~~or~~ locking mechanism(s) shall be cycled through ~~its~~ their normal operation a total of 2000 cycles for the number of cycles specified in 7.1.2.1 and 7.1.2.2. Each cycle shall consist of opening and closing the mechanism and erecting/folding the product. Cycling shall be conducted ~~on a~~ at continuous basis.

7.1.2.1 For infant bath tubs, use 2000 cycles.

7.1.2.2 For accessories, use 730 cycles.

7.2 ~~Protective Components~~—Removal of Protective Components Test:

7.2.1 Prior to conducting the torque and tension following tests, first completely submerge the testable components for 20 min in clear water that is at an initial temperature of 100 to 105°F (37.8 to 40.6°C). Conduct the following tests within 10 min after removal from the water.

7.2.2 Any protective component shall be tested in accordance with each of the following methods in the sequence listed.

7.2.3 Secure the product so that the product cannot move during the performance of the following tests:

7.2.4 Torque Test—Test—

7.2.2.1 Using any convenient method to hold the parent component in place, grasp the component to be tested and apply a torque evenly over a period of 5 s in a clockwise direction until either a rotation of 180° is attained or a torque value of 4 lbf-in. (0.4 N-m) has been reached. Gradually apply a torque of 4 lbf-in. (0.4 N-m) over a period of 5 s in a clockwise direction until a rotation of 180° from the original position has been attained or 4 lbf-in. has been exceeded. The torque or maximum rotation shall be maintained for an additional 10 s. The torque shall then be removed and the test components permitted to return to a relaxed condition. This procedure shall then be repeated in the counter-clockwise direction.

7.2.2.2 Maintain the torque value or the 180° rotation for an additional 10 s and then allow the component to return to its original position.

7.2.2.3 Repeat this test using a torque in the counterclockwise direction.

7.2.5 Tension Test—Test: The same component which has undergone the torque test also shall undergo the following tension test immediately following the torque test:

7.2.5.1 Attach a force gauge to the protective component by means of any suitable device. For components that cannot reasonably be expected to be grasped between thumb and forefinger, or teeth, on their outer diameter but have a gap of 0.04 in. (1.0 mm) or more between the rear surface of the component and the structural member of the product to which they are attached, a clamp such as shown in Fig. 2 may be a suitable device.

7.2.5.2 Be sure that the attachment device does not compress or expand the component hindering any possible removal.

7.2.5.3 Using any convenient method to hold the parent component in place, grasp the component to be tested and apply a tension. Gradually apply a force of 15 lbf (67 N) evenly over a period of 5 s in the direction that would normally be associated with the removal of the component. The device used to grasp the component should not compress or expand the component being tested so that it hinders any possible removal. protective component. Hold for an additional 10 s.

7.2.3.2 Maintain this force for an additional 10 s.

(<https://standards.iteh.ai>)
Document Preview

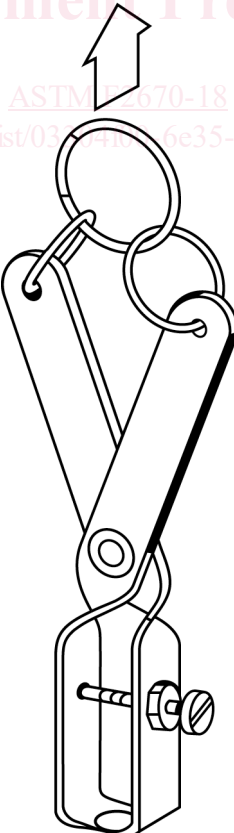


FIG. 2 Tension Test Adapter/Clamp