

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Measurement of quartz crystal unit parameters – Part 6: Measurement of drive level dependence (DLD)

Mesure des paramètres des résonateurs à quartz – Partie 6: Mesure de la dépendance du niveau d'excitation (DNE)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente. un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Measurement of quartz crystal unit parameters –
Part 6: Measurement of drive level dependence (DLD)**

**Mesure des paramètres des résonateurs à quartz –
Partie 6: Mesure de la dépendance du niveau d'excitation (DNE)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

ICS 31.140

ISBN 978-2-83220-876-2

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 DLD effects	6
3.1 Reversible changes in frequency and resistance	6
3.2 Irreversible changes in frequency and resistance	6
3.3 Causes of DLD effects.....	7
4 Drive levels for DLD measurement	7
5 Test methods.....	8
5.1 Method A (Fast standard measurement method)	8
5.1.1 Testing at two drive levels	8
5.1.2 Testing according to specification.....	8
5.2 Method B (Multi-level reference measurement method).....	9
Annex A (normative) Relationship between electrical drive level and mechanical displacement of quartz crystal units	11
Annex B (normative) Method C: DLD measurement with oscillation circuit	14
Bibliography.....	19
Figure 1 – Maximum tolerable resistance ratio γ for the drive level dependence as a function of the resistances R_{r2} or R_{r3}	9
Figure B.1 – Insertion of a quartz crystal unit in an oscillator	14
Figure B.2 – Crystal unit loss resistance as a function of dissipated power	15
Figure B.3 – Behaviour of the R_r of a quartz crystal units	16
Figure B.4 – Block diagram of circuit system.....	16
Figure B.5 – Installed $-R_{osc}$ in scanned drive level range	17
Figure B.6 – Drive level behavior of a quartz crystal unit if $-R_{osc} = 70 \Omega$ is used as test limit in the “Annex B” test	17
Figure B.7 – Principal schematic diagram of the go/no-go test circuit.....	18

INTERNATIONAL ELECTROTECHNICAL COMMISSION

MEASUREMENT OF QUARTZ CRYSTAL UNIT PARAMETERS –**Part 6: Measurement of drive level dependence (DLD)****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60444-6 has been prepared by IEC technical committee 49: Piezoelectric, dielectric and electrostatic devices and associated materials for frequency control, selection and detection.

This second edition cancels and replaces the first edition published in 1995. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) DLD measurement with oscillation circuit had the traditional method to detect the DLD abnormal modes at present time. Therefore, this method made the transition to the Annex B.
- b) High reliability crystal unit is needed to use for various applications at the present day, in order to upgrade the inspection capabilities for DLD abnormal modes, the multi-level reference measurement method was introduced into this specification.

The text of this standard is based on the following documents:

CDV	Report on voting
49/1004/CDV	49/1038/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60444 series, published under the general title *Measurement of quartz crystal unit parameters*, can be found on the IEC website.

Sample Document

get full document from standards.iteh.ai

INTRODUCTION

The drive level (expressed as power/voltage across or current through the crystal unit) forces the resonator to produce mechanical oscillations by way of piezoelectric effect. In this process, the acceleration work is converted to kinetic and elastic energy and the power loss to heat. The latter conversion is due to the inner and outer friction of the quartz resonator.

The frictional losses depend on the velocity of the vibrating masses and increase when the oscillation is no longer linear or when critical velocities, elongations or strains, excursions or accelerations are attained in the quartz resonator or at its surfaces and mounting points (see Annex A). This causes changes in resistance and frequency, as well as further changes due to the temperature dependence of these parameters.

At “high” drive levels (e.g. above 1 mW or 1 mA for AT-cut crystal units) changes are observed by all crystal units and these also can result in irreversible amplitude and frequency changes. Any further increase of the drive level may destroy the resonator.

Apart from this effect, changes in frequency and resistance are observed at “low” drive levels in some crystal units, e.g. below 1 mW or 50 μ A for AT-cut crystal units). In this case, if the loop gain is not sufficient, the start-up of the oscillation is difficult. In crystal filters, the transducer attenuation and ripple will change.

Furthermore, the coupling between a specified mode of vibration and other modes (e.g. of the resonator itself, the mounting and the back-fill gas) also depends on the level of drive.

Due to the differing temperature response of these modes, these couplings give rise to changes of frequency and resistance of the specified mode within narrow temperature ranges. These changes increase with increasing drive level. However, this effect will not be considered further in this part of IEC 60444.

The first edition of IEC 60444-6 was published in 1995. However, it has not been revised until today. In the meantime the demand for tighter specification and measurement of DLD has increased.

In this new edition, the concept of DLD in IEC 60444-6:1995 is maintained. However, the more suitable definition for the user's severe requirements was introduced. Also, the specifications based on the matters arranged in the Stanford meeting in June, 2011 are taken into consideration.

MEASUREMENT OF QUARTZ CRYSTAL UNIT PARAMETERS –

Part 6: Measurement of drive level dependence (DLD)

1 Scope

This part of IEC 60444 applies to the measurements of drive level dependence (DLD) of quartz crystal units. Two test methods (A and C) and one referential method (B) are described. “Method A”, based on the π -network according to IEC 60444-1, can be used in the complete frequency range covered by this part of IEC 60444. “Reference Method B”, based on the π -network or reflection method according to IEC 60444-1, IEC 60444-5 or IEC 60444-8 can be used in the complete frequency range covered by this part of IEC 60444. “Method C”, an oscillator method, is suitable for measurements of fundamental mode crystal units in larger quantities with fixed conditions.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60444-1, *Measurement of quartz crystal unit parameters by zero phase technique in a π -network – Part 1: Basic method for the measurement of resonance frequency and resonance resistance of quartz crystal units by zero phase technique in a π -network*

IEC 60444-5, *Measurement of quartz crystal units parameters – Part 5: Methods for the determination of equivalent electrical parameters using automatic network analyzer techniques and error correction*

IEC 60444-8, *Measurement of quartz crystal unit parameters – Part 8: Test fixture for surface mounted quartz crystal units*

3 DLD effects

3.1 Reversible changes in frequency and resistance

Reversible changes are changes in frequency and resistance occurring under the same drive levels after repeated measurements made alternatively at low and high levels, or after continuous or quasi-continuous measurements from the lowest to the highest level and back, if these changes remain within the limits of the measurement accuracy.

3.2 Irreversible changes in frequency and resistance

Irreversible changes are significant changes in frequency and/or resistance occurring at low level after an intermediate measurement at high level e.g. when a previously high resistance at low level has changed in the repeated measurement to a low resistance. Especially, when the crystal unit has not been operated for several days, its resistance may have changed back to a high value when operated again at a lower level. Greater attention should be paid to the irreversible effect since it can significantly impair the performance of devices, which are operated only sporadically.

3.3 Causes of DLD effects

Whereas the mostly reversible effects are due to excessive crystal drive level, the irreversible effects are due to production, especially to imperfect production techniques. Examples of causes are:

- Particles on the resonator surface (partly bound by oils, cleaning agents, solvents or bound electro-statically);
- Mechanical damage of the resonator (e.g. fissures due to excessively coarse lapping abrasive which may increase in size);
- Gas and oil inclusions in the electrodes (e.g. due to a poor vacuum or an inadequate coating rate during evaporation);
- Poor contacting of the electrodes at the mounting (e.g. the conductive adhesive has an inadequate metal component, was insufficiently baked out or was overheated; also excessive contact resistance between the conductive adhesive and the electrodes or mounting);
- Mechanical stresses between mounting, electrodes and quartz element.

4 Drive levels for DLD measurement

For the DLD measurement, a low and a high level of drive (and possibly further levels) are applied. The high level is the nominal drive level, which should be equal to the level in the application at its steady state.

It should be noted that this level should be below the maximum applicable level that is derived in Annex A. If not specified, a standard value for the crystal current of 1 mA, corresponding to the velocity $v_{\max} = 0,2$ m/s for AT-cut crystal units, shall be used. The drive level in watts is then calculated with the mean value of the specified maximum and minimum resistances.

The minimum drive level occurring at the start-up of an oscillator can be determined only in a few cases by active or passive measuring methods due to the noise limits of the measuring instruments for measurements according to IEC 60444-1, at approximately 1 nW or 10 μ A (depending on the equipment, the lowest power value can be reduced to 0,1 nW or 1 μ A).

A velocity $v_{\max} = 0,01$ m/s, corresponding to 50 μ A for AT-cut crystals, has proved to be practical value for π -network measurements (see "Method A").

In the following, two methods and one referential method of DLD measurement are described.

"Method A" is based on the π -network method according to IEC 60444-1, which can be used in the complete frequency range covered by this standard. It allows the fast selection of drive level sensitive quartz crystal units by a sequence of three measurements. The allowed variation of the resonance resistances given in Figure 1 is based on long-term examinations of crystal units of different manufacturers and proved to be a reliable indicator for crystal units showing start-up problems. If necessary, this method should also be extended by measuring a large number of different drive levels. However, in practice, this is not necessary in most cases (see 5.1).

"Method B" is used for devices where strict oscillation start-up requirements have to be fulfilled and for high reliability devices.

"Method C" in Annex B is an oscillator method, which is especially suitable for measuring fundamental mode crystal units in larger quantities with fixed measurement conditions (maximum drive level, $R_r \max$) in an economical way.

If the proposed measurement techniques are not sufficient in special cases, the user should have an original oscillator with slightly reduced feedback or an original filter.

“Method B” is stricter than “Method A”.

“Method B” is based on the π -network method or reflection method according to IEC 60444-1, IEC 60444-5 or IEC 60444-8, which can be used in the complete frequency range covered by this standard.

Recommendation: These methods can be used for all types of crystals, however:

- “Method A” is recommended for filter and oscillator crystals.
- “Method B” is recommended for applications with strict start-up conditions, for high reliability and for high stability applications. It is the reference method for failure analysis etc.
- “Method C” in Annex B is a go/no-go measurement technique for oscillator crystals.

5 Test methods

5.1 Method A (Fast standard measurement method)

5.1.1 Testing at two drive levels

Testing is performed at low and high drive levels as described in Clause 3 with measurements of resonance frequency and resistance according to IEC 60444-1. The tolerances are $\pm 10\%$ for the levels of current and $\pm 20\%$ for those of power.

- a) Storage for at least one day at 105°C and after that at least 2 hours at room temperature or, storage for one week at room temperature.
- b) The temperature should be kept constant during the measurement (in accordance with IEC 60444-1 and IEC 60444-5).
- c) Measurement at low drive level (10 μA): $f_r = f_{r1}$, $R_r = R_{11}$.
- d) Measurement at high drive level (1 mA): $f_r = f_{r2}$, $R_r = R_{12}$.
- e) Measurement at low drive level (10 μA): $f_r = f_{r3}$, $R_r = R_{13}$.
- f) Calculation of $\gamma_{12} = R_{11}/R_{12}$. The value of γ_{12} shall be smaller than the maximum value of γ given by the line drawn in Figure 1 (abscissa = R_{12}).
- g) The tolerable frequency change $|f_{r2} - f_{r1}|$ shall be $5 \times 10^{-6} \times f_{r1}$ unless otherwise specified in the detail specification.
- h) Calculation of $\gamma_{13} = R_{11}/R_{13}$. The value of γ_{13} shall be smaller than $(\gamma + 1)/2$, where the value of γ is taken from Figure 1 (abscissa = R_{13}).
- i) The tolerable frequency change $|f_{r3} - f_{r1}|$ shall be $2,5 \times 10^{-6} \times f_{r1}$, unless otherwise specified in the detail specification.
- j) The resistance value shall not exceed the maximum value given by the detail specification at any drive levels.

5.1.2 Testing according to specification

Testing is performed at low to high drive levels and back again to low level as described in 5.1.1. These and, if necessary, further levels with their tolerances, the permissible deviations of the frequency and resistance as well as storage conditions shall be specified in the detail specification.

NOTE 1 The given γ -curve was verified by results obtained over many years of experience with crystal units for many oscillator types. In most cases, there will be no trouble in start-up, but in critical oscillator configurations, problems may occur. As it is not possible to manufacture crystal units, which have a constant resistance at any drive level, the proposed γ -curve gives tolerable relations.

Definition of drive level values can be agreed between manufacturer and customer.

Use the nominal drive level of the detail specification as value for the high drive level. For measurement at very high drive levels an additional amplifier may be required.

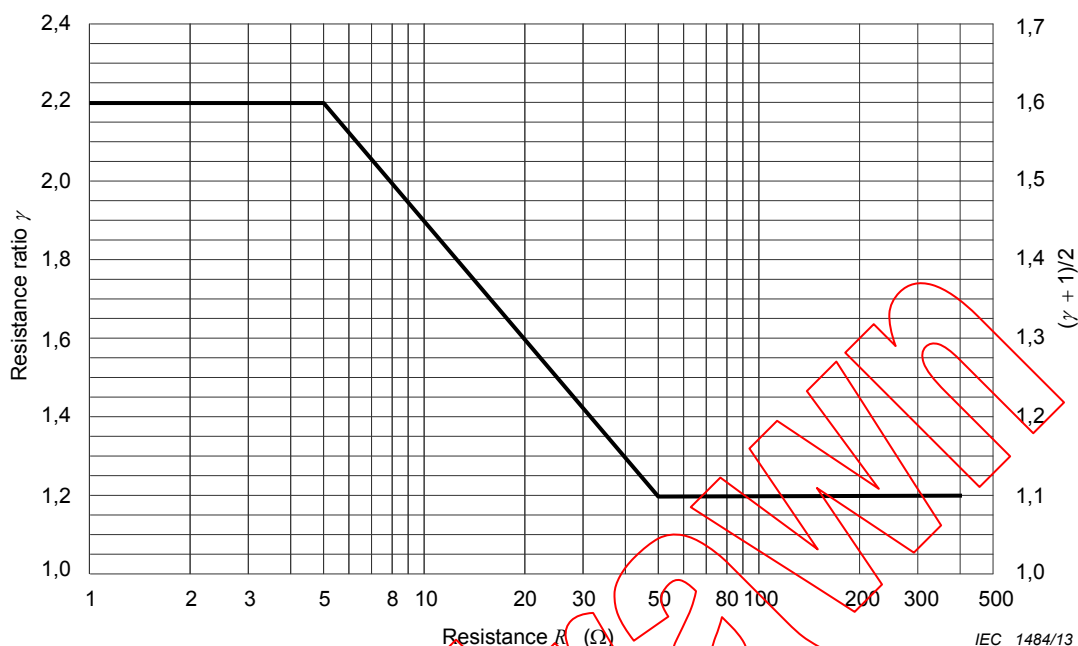


Figure 1 – Maximum tolerable resistance ratio γ for the drive level dependence as a function of the resistances R_{r2} or R_{r3}

NOTE 2 The equation for the recommended drive level (if not otherwise specified in the data sheet) is as follows. Details can be found in Annex A of IEC 60122-2-1:1991, Amendment 1:1993.

$$I_q = K \cdot \frac{nA}{\sqrt{f}}$$

where,

- I_q is the recommended current for oscillating state;
- n is the overtone, fundamental vibration mode, $n = 1$;
- A is the electrode size in mm^2 ;
- f is the frequency in MHz;
- K is $0,35 \text{ mA} \cdot \text{mm}^{-2} \cdot \text{s}^{-1/2}$.

5.2 Method B (Multi-level reference measurement method)

Testing is performed at low and high drive levels as described in Clause 3 with measurements of resonance frequency and resistance according to IEC 60444-5. The tolerances are $\pm 10\%$ for the levels of current and $\pm 20\%$ for those of power.

- a) Storage for at least one day at 105°C and after that at least 2 hours at room temperature or storage for one week at room temperature.

NOTE If considered as necessary, the customer and the maker agree on a higher temperature and a longer duration for the storage before DLD measurement.

- b) The temperature should be kept constant during the measurement IAW (in accordance with IEC 60444-5).
- c) The drive level is applied by two types of measurement units. It should also be applied sequentially starting from the lowest to the highest value and then back to the lowest value. A definition for the unit of drive levels shall be specified between the crystal manufacturer and the user.

- 1) When the unit of a drive level is mA;

Measurement drives level: from 2 μ A to nominal drive level in at least 7 levels which are logarithmically scaled. (Refer to the equation given under line item f)).

- 2) When the unit of a drive level is μ W;

Measurement drives level: From 2 nW to nominal drive level in at least 7 levels which are logarithmically scaled. (Refer to the equation given under line item f)).

- d) The maximum frequency excursion over all drive levels shall be less than following specifications.

$$(1) \frac{f_s(i)_{\max} - f_s(i)_{\min}}{f_{\text{NOM}}} < 5 \times 10^{-6}$$

or,

$$(2) \frac{f_s(i)_{\max} - f_s(i)_{\min}}{f_{\text{NOM}}} < 0,5 \times f_{\text{ADJ}}$$

where

$f_s(i)_{\max}$ is the maximum value for frequency measurement values with $i = 1$ to $2 \cdot N - 1$ drive levels;

$f_s(i)_{\min}$ is the minimum value for frequency measurement values with $i = 1$ to $2 \cdot N - 1$ drive levels;

f_{NOM} is the nominal frequency;

f_{ADJ} is the practical specification for frequency adjustment tolerance.

- e) The maximum ratio of resistance change and the maximum resistance over drive levels shall be as following specifications.

$$(1) \frac{R_1(i)_{\max}}{R_1(i)_{\min}} < \gamma$$

and

$$(2) \frac{R_1(1)}{R_1(2 \cdot N - 1)} < \frac{(\gamma + 1)}{2}$$

and

$$(3) R_1(i)_{\max} < R_{1,\max}$$

where,

$R_1(i)_{\max}$ is the maximum value for resistance measurement values with $i = 1$ to $2 \cdot N - 1$ drive levels;

$R_1(i)_{\min}$ is the minimum value for resistance measurement values with $i = 1$ to $2 \cdot N - 1$ drive levels;

$R_{1,\max}$ is the maximum resistance, specified by the detail specification.

γ is the resistance ratio.

- f) The N drive levels should be logarithmically scaled, i.e. $DL_{N+1} = DL_N \times K$. The equation for the recommended drive level (if not otherwise specified in the data sheet) is as follows.

$$K = \left(\frac{DL_{\max}}{DL_{\min}} \right)^{\frac{1}{N-1}}$$

- g) A larger number of drive levels may be necessary in special applications, e.g. those caused by mechanical coupling with nonlinear spurious resonances (dips) and for failure analysis.