

INTERNATIONAL STANDARD

COMMENTED VERSION

Surface mounting technology -
Part 1: Standard method for the specification of surface mounting components
(SMDs)

get full document from standards.iteh.ai



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2026 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search -

webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	5
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms and definitions	9
4 Requirements for component design and component specifications	11
4.1 General requirements	11
4.2 Classification of electronic assemblies	12
4.2.1 General	12
4.2.2 Level A: General electronics products	12
4.2.3 Level B: Dedicated service electronics products	12
4.2.4 Level C: High-performance electronics products	12
4.3 Component marking and labelling	12
4.3.1 General	12
4.3.2 Marking of multipin components	12
4.3.3 Marking of components with polarity	12
4.3.4 Durability of component marking	12
4.4 Component outline and design	13
4.4.1 Drawing and specification	13
4.4.2 Termination design	14
4.4.3 Pick-up area requirements	14
4.4.4 Bottom surface requirements	15
4.4.5 Requirements for terminals	16
4.4.6 Component height	18
4.4.7 Component weight	18
4.4.8 Creepage and clearance distances - Insulation coordination	18
4.5 General requirements for components related to assembly technology	19
4.5.1 Robustness of components	19
4.5.2 Recommendation for land pattern design	20
4.6 Cleanliness of components	20
4.6.1 General remarks	20
4.6.2 Particle contaminations	20
4.6.3 Ionic contamination	21
4.6.4 Other surface contamination	21
4.7 Surface roughness	21
4.8 Requirements related to packaging and transportation	21
4.8.1 Packaging	21
4.8.2 Labelling of product packaging	22
4.8.3 Storage and transportation	22
4.9 Thermal and electrical performance	22
4.9.1 Relevant parameters	22
4.9.2 Applicable standards	23
4.10 Component reliability assurance	23
4.11 Compliance information	23
4.11.1 General	23
4.11.2 Material declaration	23
4.11.3 Environmental regulatory compliance	23

4.11.4	Considerations on the materials' supply chain	23
5	Assembly processes	24
5.1	General.....	24
5.2	Placement or insertion	24
5.3	Mounting.....	24
5.4	Cleaning (where applicable).....	24
5.4.1	Purpose.....	24
5.4.2	Cleaning methods.....	24
5.4.3	Typical cleaning conditions for assemblies	25
5.5	Post assembly processes.....	25
5.6	Removal and or replacement of SMDs	26
5.6.1	Removal and or replacement of soldered SMDs.....	26
5.6.2	Removal and or replacement of glued SMDs	26
6	Soldering.....	27
6.1	General.....	27
6.1.1	Mounting by soldering.....	27
6.1.2	Securing the component on the substrate prior to soldering.....	29
6.1.3	Reflow soldering	29
6.1.4	Wave soldering.....	31
6.1.5	Other soldering methods.....	31
6.2	Process conditions.....	31
6.2.1	General	31
6.2.2	Commonly used solder alloys	31
6.2.3	Reflow soldering.....	31
6.2.4	Wave soldering.....	33
6.3	Requirements for components and component specifications.....	34
6.3.1	General	34
6.3.2	Requirements for temperature sensitive devices	34
6.3.3	Wettability Solderability	34
6.3.4	Resistance to dissolution of metallization	35
6.3.5	Resistance to soldering heat.....	35
6.3.6	Resistance to vacuum during soldering.....	35
6.3.7	Resistance to cleaning solvent media and processes.....	36
6.3.8	Warpage during reflow soldering	37
6.3.9	Rework of soldered components	38
7	Conductive glue bonding	38
7.1	Mounting.....	38
7.2	Bonding strength test for the component glue interface test.....	39
7.3	Requirements to components for conductive glue bonding.....	39
7.3.1	Components for conductive glue bonding	39
7.3.2	Cleanliness of the surface	40
7.3.3	Terminal surface defects	40
7.3.4	Outgassing of halogenic substances.....	40
7.3.5	Coplanarity	41
7.3.6	Stand-off	41
7.3.7	Terminal dimensions and tolerances.....	41
7.3.8	Resistance to curing heat	41

8	Sintering.....	41
8.1	General.....	41
8.2	Typical process conditions for wet silver-sintering processes.....	42
8.3	Requirements for components and component specifications.....	42
9	Solderless interconnection.....	43
9.1	General.....	43
9.2	Typical process conditions.....	43
9.3	Requirements for components and component specifications.....	44
9.4	Rework of components with solderless interconnections.....	44
Annex A (informative) Details on compliance information.....		45
A.1	Material declaration.....	45
A.2	Environmental regulatory compliance.....	46
A.3	Considerations on the materials' supply chain.....	47
Annex B (informative) Sustainability.....		48
B.1	General.....	48
B.2	Programs to support sustainable products and production.....	48
B.2.1	Eco-design of products (electronic equipment).....	48
B.2.2	Life Cycle Assessment (or analysis) (LCA).....	48
B.2.3	Product Carbon Footprint (PCF).....	49
B.2.4	GHG (greenhouse gases), including CO ₂ emissions in manufacturing.....	49
B.2.5	Energy usage in the production.....	49
B.2.6	Recycling, recovering and repair.....	49
B.2.7	Sustainability of work conditions.....	49
Bibliography.....		50
List of comments.....		54
Figure 1 – Example of a component with marked specific orientation put in tape (top) and tray (bottom).....		
		13
Figure 2 – Vacuum pipette, pick-up area and component compartment.....		15
Figure 3 – Coplanarity of terminals.....		16
Figure 4 – Stable seating of component.....		16
Figure 5 – Unstable seating of component.....		17
Figure 6 – Terminals arranged peripherally in two rows.....		17
Figure 7 – Good contrast between component body and surroundings.....		17
Figure 8 – Component weight and pipette suction strength.....		18
Figure 9 – Process steps for soldering.....		29
Figure 10 – Generic reflow temperature/time profile.....		32
Figure 11 – Generic wave soldering temperature/time profile.....		33
Figure 12 – Process steps for gluing.....		39
Figure 13 – Stand-off definition.....		41
Figure 14 – Sinter process on one side, both sides, and both sides including presintering.....		42
Table 1 – Typical roughness requirements.....		21
Table 2 – Basic cleaning processes.....		25

Table 3 – Examples of substances proposed to be included in risk evaluation and customer reporting 40

Table 4 – Examples of typical curing conditions 41

Sample Document

get full document from standards.iteh.ai

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**Surface mounting technology -
Part 1: Standard method for the specification of surface mounting
components (SMDs)**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This commented version (CMV) of the official standard IEC 61760-1:2026 edition 4.0 allows the user to identify the changes made to the previous IEC 61760-1:2020 edition 3.0. Furthermore, comments from IEC TC 91 experts are provided to explain the reasons of the most relevant changes, or to clarify any part of the content.

A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text. Experts' comments are identified by a blue-background number. Mouse over a number to display a pop-up note with the comment.

This publication contains the CMV and the official standard. The full list of comments is available at the end of the CMV.

IEC 61760-1 has been prepared by IEC technical committee 91: Electronics assembly technology. It is an International Standard.

This fourth edition cancels and replaces the third published in 2020. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) added new subclause 4.2 – Classification of electronic assemblies;
- b) added new subclause 4.4.8 – Creepage and clearance distances - Insulation coordination;
- c) added new subclause 4.9 – Thermal and electrical performance;
- d) updated Clause 6 – Soldering: now including requirements related to application of low temperature solders;
- e) added new subclause 6.2.2 – Commonly used solder alloys;
- f) updated subclause 6.3.6 – Resistance to vacuum during soldering;
- g) updated subclause 6.3.7 – Resistance to cleaning media and processes - now includes the tests in IEC 60068-2-88, *Tests – Test XD: Resistance of components and assemblies to liquid cleaning media*;
- h) added new subclause 6.3.9 – Rework of soldered components;
- i) added new Annex B – Sustainability.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
91/2103/FDIS	91/2113/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61760 series, published under the general title *Surface mounting technology*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- replaced.

INTRODUCTION

Specifications for electronic components have in the past been formulated for each component family. The regulations for environmental tests have been selected from IEC 60068 and other IEC and ISO publications. The intention for this procedure was that all components, once installed in a piece of equipment, had to satisfy certain criteria.

The introduction and increasing use of different mounting processes on one assembly make it ~~necessary~~ essential to extend the existing requirements to include those arising from processing during assembly.

Nevertheless, there existed no harmonized standard that prescribes the content of a component specification before the publication of this document. It is the purpose of this document to define the general requirements for component specifications derived from the assembly processes. This is done in three steps.

In the first step, general requirements for component specifications and component design related to the handling and placement of the component on the substrate are given (Clause 4). In the second step, the requirements related to assembly processes are given (Clause 5). In the third step, additional requirements resulting from specific mounting methods are given (from Clause 6 to Clause 9).

Additional consideration with respect to the through-hole components are crucial to mixed technology boards, i.e. boards containing through-hole components and SMDs, ~~require additional consideration with respect to the through-hole components~~. These ~~may~~ can be subject to the same requirements as the SMDs. Persons responsible for drafting specifications for "non-surface mounting components" wishing to include a statement on their ability to withstand surface mounting conditions should use the classifications and tests set out in the present document.

get full document from standards.iteh.ai

1 Scope

This part of IEC 61760 defines requirements for component specifications of electronic components that are intended for usage in surface mounting technology. To this end, it specifies a reference set of process conditions and related test conditions to be considered when compiling component specifications.

The objective of this document is to ensure that a wide variety of SMDs can be subjected to the same placement, mounting and subsequent processes (e.g. cleaning, inspection) during assembly. This document defines tests and requirements that ~~need to be part of~~ are included in any SMD component's general, sectional or detail specification. In addition, this document provides component users and manufacturers with a reference set of typical process conditions used in surface mounting technology.

Some of the requirements for component specifications in this document are also applicable to components with leads intended for mounting on a circuit board, including solderless interconnection technology. Cases for which this is appropriate are indicated in the relevant subclauses.

NOTE Solderless interconnection technology refers to a mounting method which is not part of the surface-mounting process and the components do not undergo a soldering operation. Such components are included in this document because the mounting of components for solderless interconnection commonly occurs after the mounting of SMDs.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 60068 (all parts), Environmental testing~~

IEC 60068-2-2, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-21, *Environmental testing – Part 2-21: Tests – Test U: Robustness of terminations and integral mounting devices*

~~IEC 60068-2-45:1980, Basic environmental testing procedures – Part 2-45: Tests – Test XA and guidance: Immersion in cleaning solvents~~
~~IEC 60068-2-45:1980/AMD1:1993~~

IEC 60068-2-58, *Environmental testing – Part 2-58: Tests – Test Td: Test methods for solderability, resistance to dissolution of metallization and to soldering heat of surface mounting devices (SMDs)*

IEC 60068-2-88, *Environmental testing - Part 2-88: Tests – Test XD: Resistance of components and assemblies to liquid cleaning media*

IEC 60191-6, *Mechanical standardization of semiconductor devices – Part 6: General rules for the preparation of outline drawings of surface mounted semiconductor device packages*

IEC 60194-2, *Printed boards design, manufacture and assembly – Vocabulary – Part 2: Common usage in electronic technologies as well as printed board and electronic assembly technologies*

IEC 60286-3, *Packaging of components for automatic handling - Part 3: Packaging of surface mount components on continuous tapes*

IEC 60286-4, *Packaging of components for automatic handling - Part 4: Stick magazines for electronic components encapsulated in packages of different forms*

IEC 60286-5, *Packaging of components for automatic handling – Part 5: Matrix trays*

IEC 60286-6, *Packaging of components for automatic handling – Part 6: Bulk case packaging for surface mounting components*

IEC 60664-1, *Insulation coordination for equipment within low-voltage supply systems - Part 1: Principles, requirements and tests*

IEC 60749-20:~~2008~~, *Semiconductor devices - Mechanical and climatic test methods - Part 20: Resistance of plastic encapsulated SMDs to the combined effect of moisture and soldering heat*

IEC 61188-6-4, *Printed boards and printed board assemblies – Design and use – Part 6-4: Land pattern design – Generic requirements for dimensional drawings of surface mounted components (SMD) from the viewpoint of land pattern design*

IEC 61340-5-1, *Electrostatics – Part 5-1: Protection of electronic devices from electrostatic phenomena – General requirements*

IEC 61340-5-3, *Electrostatics – Part 5-3: Protection of electronic devices from electrostatic phenomena – Properties and requirements classification for packaging intended for electrostatic discharge sensitive devices*

IEC 61760-2, *Surface mounting technology – Part 2: Transportation and storage conditions of surface mounting devices (SMD) – Application guide*

IEC 61760-4, *Surface mounting technology – Part 4: Classification, packaging, labelling and handling of moisture sensitive devices*

IEC 62090, *Product package labels for electronic components using bar code and two-dimensional symbologies*

IPC/JEDEC J-STD-020, *Moisture/Reflow Sensitivity Classification for ~~Nonhermetic Solid State~~ Non-hermetic Surface Mount Devices (SMDs)*

IPC/JEDEC J-STD-033, *Handling, ~~Packaging~~Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices*

3 Terms and definitions

For the purposes of this document, the terms and definitions of IEC 60194-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1**adhesive**

substance such as glue or cement used to bond objects together

Note 1 to entry: In surface mounting technology different gluing systems are used:

- nonconductive adhesive (only for mechanical connection);
- electrically conductive adhesive (for electrical and mechanical connection);
- thermally conductive adhesive (for thermal and mechanical connection);
- combination of electrically and thermally conductive adhesive.

Most used adhesives are thermal curing systems, but there are also UV-curing systems in use.

3.2**centring force**

~~force required by the pick-up tooling to centre a surface mounting device in its proper location on a substrate~~

3.2**compliant press-fit pin**

press-fit pin with at least one compliant press-fit zone designed to be inserted into a plated-through hole of a circuit board

3.3**compliant press-fit zone**

specifically shaped section of a press-fit pin which is elastically and plastically deformed during pin insertion

Note 1 to entry: A compliant press-fit zone is characterized by its base material, surface finish and geometry.

3.4**coplanarity**

distance in height between the lowest and highest leads when the component is in its seating plane

3.5**dewetting**

condition that results when molten solder coats a surface and then recedes to leave irregularly shaped mounds of solder that are separated by areas that are covered with a thin film of solder and with the basis metal not exposed

3.6**dissolution of metallization**

process of dissolving metal or a plated metal alloy, usually by introduction of chemicals

Note 1 to entry: For the purposes of this document, the dissolution of metallization also includes dissolution by exposure to molten solder.

3.7**immersion attitude**

positioning of an object when immersed in a solder bath

3.7**lead-free component**

~~component where lead content in the materials is equal to or less than 0,1 % by weight per material used~~

3.8**Montreal Protocol**

agreement by industrialized nations, at a meeting held in Montreal, Canada, to eliminate chlorofluorocarbons from all processes by 1995

3.9**pick-up force**

~~dynamic force exerted on the body of a component—generally from above—and its seating plane during the pick-up of the component (e.g. from a tape or tray)~~

~~Note 1 to entry:—The maximum level is normally taken into account.~~

3.9**placement force**

dynamic force exerted on the component body (generally from above) and its seating plane

Note 1 to entry: This occurs during the period between the component's first contact with the substrate (or the soldering paste or adhesive, etc.) and its coming to rest. The maximum level is normally taken into account.

3.10**resistance to soldering heat**

ability of a component to withstand the effects of the heat generated by the soldering process

3.11**seating plane**

surface on which a component rests

3.13**solderability**

~~ability of a metal to be wetted by molten solder~~

3.14**solder meniscus**

~~contour of a solder shape that is the result of the surface tension forces that take place during wetting~~

3.12**stand-off**

distance between seating plane of the component and the seating plane of the terminations

3.13**substrate**

basic material that forms the support structure of an electronic circuit

3.14**surface mounting component****surface mounting device**

SMD

electronic component designed for mounting on to terminal pads or conducting tracks on the surface of substrate

3.15**wetting**

physical phenomenon in which surface tension of a liquid, usually when in contact with solids, is reduced to the point where the liquid diffuses and makes intimate contact with the entire substrate surface in the form of a thin layer

4 Requirements for component design and component specifications**4.1 General requirements**

A component specification for surface mounting devices (SMDs) shall, in addition to the requirements listed in 4.3 to 4.11, contain specifications of the relevant tests and requirements from Clause 5 to Clause 9.

4.2 Classification of electronic assemblies **1**

4.2.1 General

This document recognizes that electrical and electronic assemblies are subject to classifications by intended end-item use. Three general end-product levels have been established to reflect differences in producibility, functional performance requirements, and verification (inspection/test) frequency.

It should be recognized that there can be overlaps of equipment between levels. The user of the assemblies is responsible for determining the level to which the product belongs. The contract shall specify the level required and indicate any exceptions or additional requirements to the parameters, where appropriate.

4.2.2 Level A: General electronics products

This level includes consumer products, some computers and computer peripherals, and hardware suitable for applications where the major requirement is function of the completed assembly.

4.2.3 Level B: Dedicated service electronics products

This level includes communications equipment, sophisticated business machines, and instruments where high performance and extended life is required, and for which uninterrupted service is desired but not mandatory. Typically, the end-use environment would not cause failures.

4.2.4 Level C: High-performance electronics products

This level includes all equipment where continued performance or performance-on-demand is mandatory. Equipment downtime cannot be tolerated, end-use environment can be uncommonly harsh, and the equipment shall function when required, such as life support systems and other critical systems.

4.3 Component marking and labelling

4.3.1 General

In general, marking should identify 2nd level terminal finish or material and should follow J-STD-609 [1]. This is critical because assembly reflow operations can be dependent on the specific solder alloys per 6.1.3.

4.3.2 Marking of multipin components

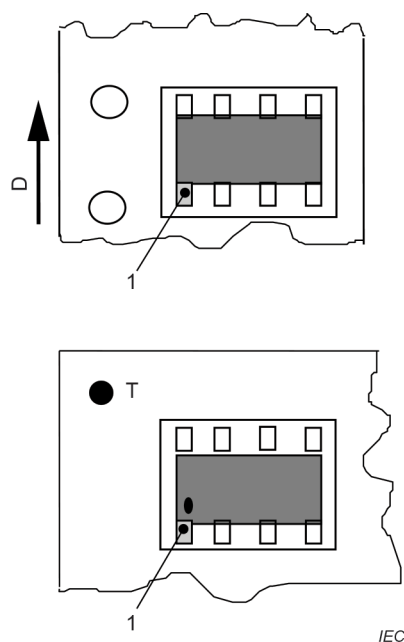
Pin 1 (see [Figure 1](#)) shall be clearly marked on a multipin component (e.g. SO-IC, QFP).

4.3.3 Marking of components with polarity

For components with polarity, the polarity of the component shall be clearly marked on the component (e.g. for electrolytic capacitors).

4.3.4 Durability of component marking

Specifications shall require that the specified component marking shall remain legible after the tests specified in [6.3.7](#) have been performed. This test shall be performed after completion of the relevant test for resistance to soldering heat or for solderability, as specified in the component specification.

**Key**

D	direction of unreeling
T	tray
1	pin 1 of the component

Figure 1 – Example of a component with marked specific orientation put in tape (top) and tray (bottom)

4.4 Component outline and design

4.4.1 Drawing and specification

Drawings, including bottom-view, top-view and side-view drawings, of the component showing all dimensions and tolerances of its body and terminals shall be part of the component specification. The drawings shall include reference to the positioning of the component body and terminals on the mounting land pattern. If conductive surfaces are not planar, their three-dimensional geometry shall be clearly specified with the relevant tolerances. An example is the presence of grooves on thermal pads of QFP.

In any 2D drawing or 3D data, conductive parts ~~and~~ or surfaces and insulating parts ~~or~~ surfaces shall be clearly distinguished, at least for the bottom and the sides of components, as well as for movable parts. This requirement applies both to the disassembled and the assembled condition for parts requiring a final assembly step after mounting on a substrate (e.g. if a connector contains spring-loaded retainers whose position and/or angle changes upon mating). The locations and dimensions of conductive parts ~~or~~ surfaces shall be specified, even if they are not intended for establishing a contact with the mounting surface, for example punched or sawn surfaces consisting of unplated leadframe resulting from component singulation for moulded semiconductor packages.

The generic requirements for dimensional drawings of SMDs from the viewpoint of land-pattern design as specified in IEC 61188–6–4 shall be adopted for surface mounting devices.

Where necessary (e.g. in the case of large components with an overall length of more than 25 mm), the detail specification shall contain data on thermal expansion, at least along the X and Y axes. In the case of mechanical fixation of large components (e.g. by screwing), mismatch of the coefficients of thermal expansion between component and mounting substrate can result in warping of the component and the mounting substrate.