

INTERNATIONAL STANDARD

Polymeric HV insulators for indoor and outdoor use - General definitions, test methods and acceptance criteria

Sample Document

get full document from standards.iteh.ai



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2025 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search -

webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
INTRODUCTION	5
1 Scope	7
2 Normative references	7
3 Terms and definitions	8
4 Identification	12
5 Environmental conditions	12
6 Information on transport, storage and installation	13
7 Classification of tests	13
7.1 General	13
7.2 Design tests	13
7.3 Type tests	14
7.4 Sample tests	14
7.5 Routine tests	14
8 General requirements for insulator test specimens	14
9 Design tests	15
9.1 General	15
9.2 Tests on interfaces and connections of end fittings	15
9.2.1 General	15
9.2.2 Test specimens	15
9.2.3 Reference flashover voltage and reference temperature for verification tests	15
9.2.4 Reference flashover voltage test	16
9.2.5 Product specific pre-stressing	16
9.2.6 Water immersion pre-stressing	16
9.2.7 Verification tests	16
9.3 Tests on housing material	18
9.3.1 Hardness test	18
9.3.2 Accelerated weathering test	19
9.3.3 Tracking and erosion test – 1 000 h salt fog AC voltage test	20
9.3.4 Flammability test	22
9.3.5 Hydrophobicity transfer test	23
9.4 Tests on core material	24
9.4.1 General	24
9.4.2 Porosity test (Dye penetration test)	24
9.4.3 Water diffusion test	25
9.4.4 Stress corrosion test	26
9.5 Water diffusion test on core with housing	26
9.5.1 General	26
9.5.2 Test specimens	26
9.5.3 Test procedure	27
9.5.4 Acceptance criteria	27
Annex A (informative) Explanation of the concept of classes for the design tests	28
Annex B (informative) Recommended test application	29
Annex C (informative) Tests for AC or DC application	31

Annex D (informative) Difference between the tracking and erosion and accelerated ageing test on polymeric insulators	32
Annex E (informative) Consideration of electric field control	33
Bibliography.....	35
Figure 1 – Illustration of different types of insulators	9
Figure 2 – Illustration of the electrodes position and axial length	17
Figure 3 – Example of boiling container for the water diffusion test	19
Figure 4 – Examples of test specimen for core material	24
Figure 5 – Example of porosity test specimen with certain areas not being allowed to be sealed.....	25
Figure E.1 – Typical sealing area description for composite insulator.....	34
Table 1 – Normal environmental conditions.....	12
Table 2 – Initial NaCl content of the water as a function of the specimen dimensions	21
Table 3 – Flammability requirements	23
Table B.1 – Application on interfaces and connections of end fittings.....	29
Table B.2 – Application on housing materials.....	29
Table B.3 – Application on core materials	29
Table B.4 – Application on core with housing.....	30
Table C.1 – Tests for AC or DC application.....	31

Sample Document

get full document from standards.iteh.ai

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**Polymeric HV insulators for indoor and outdoor use -
General definitions, test methods and acceptance criteria**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62217 has been prepared by IEC technical committee 36: Insulators. It is an International Standard.

This third edition cancels and replaces the second edition published in 2012. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) The scope of the document is specified to comprise composite insulators with solid and hollow core and resin insulators used for both AC and DC systems in indoor and outdoor applications of HV overhead lines and substations; hybrid insulators (defined in IEC TS 62896) with ceramic core and polymeric housing are also included, while coated insulators (e.g. with Room Temperature Vulcanized (RTV) silicone rubber coatings) are not considered in this document;

- b) Steep-front impulse voltage test is modified to avoid unwanted flashovers between the leads of the electrodes;
- c) Differences between hydrophobicity transfer material (HTM) and non-HTM housing materials are specified and relevant test methods and acceptance criteria for polymeric insulators with HTM housing are introduced;
- d) The previous water diffusion test on core materials with or without housing is split into two tests. One is on core materials without housing, the other is on core materials with housing. The acceptance criteria are modified;
- e) Stress corrosion test for core materials is introduced;
- f) Annex B summarizes the test application for evaluating the quality of interfaces and connections of end fittings, housing materials and core materials;
- g) Annex E is introduced to emphasize the need for control of electric fields of polymeric insulators for AC. The control of electric fields of polymeric insulators for DC is still under consideration.

The text of this International Standard is based on the following documents:

Draft	Report on voting
36/612/FDIS	36/631/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

INTRODUCTION

Polymeric insulators consist either of one insulating material (resin insulators) or two or several insulating materials (composite insulators). The insulating materials are generally cross-linked organic materials synthesised from carbon or silicon chemistry and form the insulating body. Insulating materials can be composed from organic materials containing various inorganic and organic ingredients, such as fillers and extenders. End fittings are often used at the ends of the insulating body to transmit mechanical loads. Despite these common features, the materials used and the construction details employed by manufacturers might differ significantly.

The tests given in this document are those which are, in general, common to a majority of insulator designs and materials, whatever their final application. Considering the increasing applications of polymeric insulators, the scope of this document specifies technical requirements for solid core, hollow core and resin insulators used in AC and DC systems, in indoor and outdoor, in applications of HV overhead lines and substations to ensure proper insulator performance under normal operating conditions. The technical requirements have been regrouped in this document to avoid repetition of the relevant product standards and drift between procedures as the various product standards are drafted or revised.

The majority of these tests have been grouped together as "Design tests", to be performed only once for insulators of the same design. The design tests are intended to eliminate insulator designs, materials or manufacturing technologies which are not suitable for high voltage (HV) applications. The influence of time on the electrical properties of the complete polymeric insulator and its components (core, housing, interfaces etc.) has been considered in specifying the design tests in order to ensure a satisfactory lifetime under normal operating and environmental conditions. To ensure quality and reliable long-term performance of insulators, the requirements on the modification of certain test procedures as well as the introduction of new tests were identified.

Pollution tests, according to IEC 60507 or IEC TS 61245 [1]¹, are not included in this document. Specific pollution tests for polymeric insulators are under consideration of IEC, indications for design considering pollution are given in IEC TS 60815-1, IEC TS 60815-3 [2] and IEC TS 60815-4 [3].

Before the appropriate standard for DC applications will be issued, the majority of tests listed in this document can also be applied to DC insulators. The 1 000 h AC salt fog tracking and erosion test is considered as a design test in this document to reject materials in combination with the design which are inadequate. For the time being, the 1 000 h AC salt fog tracking and erosion test is used to establish a minimum requirement for the tracking and erosion resistance, for both AC and DC. For DC applications, a specific DC tracking and erosion test procedure as a design test has not been developed. Further tracking and erosion test methods such as the 5 000 hour and the tracking wheel test are described in IEC TR 62730 [4] and can be used for research or other purposes. Tracking and erosion tests are not intended to evaluate long term performance of insulators in harsh environments by the simulation of multiple environmental factors. It is therefore necessary to carry out ageing tests for insulator designs under cumulative service stresses. These aging tests do not form part of this present document.

For polymeric insulators with hydrophobicity transfer property, relevant test procedures are introduced. In this document the hydrophobicity transfer test is intended to distinguish the HTM from non-HTM rather than differentiate between different HTMs degrees.

The water diffusion test is divided into two tests. The first one is for the core (as earlier), the second one is for the core with housing. The water diffusion test on core with housing addresses the interface between the core and the housing. The acceptance criteria are modified and harmonized for both tests.

¹ Numbers in square brackets refer to the Bibliography.

Stress corrosion test for insulators mainly subjected to tensile loads is introduced to minimize the risks of brittle fractures.

Annex B summarizes the test application for evaluating the quality of interfaces and connections of end fittings, housing materials and core materials.

Annex E is introduced to emphasize the need for the control of electric field of polymeric insulators under AC voltage.

IEC Guide 111 has been followed wherever possible during the preparation of this document.

Sample Document

get full document from standards.iteh.ai

1 Scope

This International Standard is applicable to polymeric insulators for AC systems with a nominal voltage greater than 1 000 V (frequency less than 100 Hz) and DC systems with a nominal voltage greater than 1 500 V whose insulating body consists of one or various organic materials. Polymeric insulators covered by this document are intended for use both on HV overhead lines and in substations, in both indoor and outdoor applications. They include composite insulators with solid and hollow core and resin insulators. Hybrid insulators with ceramic core and polymeric housing are also included, while coated insulators (e.g. with RTV silicone rubber coatings) are not included in this standard. Electrical tests described in this document are done under AC voltage and are in general applicable to insulators to be used in DC systems too. Tests under DC voltage are intended to reflect up-to-date knowledge and experience.

NOTE Only polymeric housing materials of hybrid insulators are specified in this document. Tests for core materials and the interfaces between housing and core of hybrid insulators are not included.

The object of this document is

- to define the common terms used for polymeric insulators;
- to prescribe common test methods for design tests on polymeric insulators;
- to prescribe acceptance or failure criteria, if applicable;

These tests, criteria and recommendations are intended to ensure a satisfactory lifetime under normal operating and environmental conditions (see Clause 5). This document includes design tests intended to reject materials or designs which are inadequate under normal operating and environmental conditions. This document defines test methods and acceptance criteria. The applicable tests are given in the relevant product standard.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-471:2007, *International Electrotechnical Vocabulary (IEV) - Part 471: Insulators*

IEC 60060-1, *High-voltage test techniques - Part 1: General definitions and test requirements*

IEC 60507:2013+COR1:2018, *Artificial pollution tests on high-voltage ceramic and glass insulators to be used on a.c. systems*

IEC 60695-11-10, *Fire hazard testing - Part 11-10: Test flames - 50 W horizontal and vertical flame test methods*

IEC 60721-1, *Classification of environmental conditions - Part 1: Environmental parameters and their severities*

IEC TS 60815-1, *Selection and dimensioning of high-voltage insulators intended for use in polluted conditions - Part 1: Definitions, information and general principles*

IEC TR 62039:2021, *Selection guidelines for polymeric materials for outdoor use under HV stress*

ISO 868, *Plastics and ebonite - Determination of indentation hardness by means of a durometer (Shore hardness)*

ISO 4892-2, *Plastics - Methods of exposure to laboratory light sources - Part 2; Xenon-arc lamps*

ISO 21920-2, *Geometrical product specifications (GPS) Surface texture: Profile - Part 2: Terms, definitions and surface texture parameters*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-471:2007 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

high voltage

HV

voltage over 1 000 V AC or over 1 500 V DC or over 1 500 V peak value

3.2

polymeric insulator

insulator whose insulating body consists of at least one organic based material

Note 1 to entry: Polymeric insulators are also known as non-ceramic insulators.

Note 2 to entry: Coupling devices may be attached to the ends of the insulating body.

[SOURCE: IEC 60050-471:2007, 471-01-13]

3.3

resin insulator

polymeric insulator whose insulating body consists of a solid insulator trunk and sheds protruding from the insulator trunk made from only one organic based housing material (e.g. cycloaliphatic epoxy)

3.4

composite insulator

insulator made of at least two insulating parts, namely a core and a housing, equipped with end fittings


Note 1 to entry: Composite insulators, for example, can consist either of individual sheds mounted on the core, with or without an intermediate sheath, or alternatively, of a housing directly moulded or cast in one or several pieces on to the core.

[SOURCE: IEC 60050-471:2007, 471-01-02]

3.5

hybrid insulator

insulator that consists of a ceramic core and a polymeric housing, equipped with one or more metal fittings

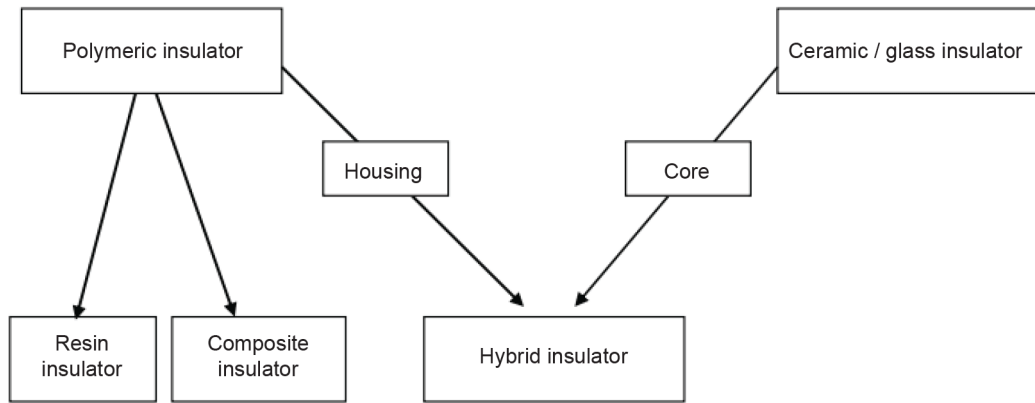

IEC

Figure 1 – Illustration of different types of insulators

SEE: Figure 1.

Note 1 to entry: According to IEC TS 62896 [5].

Note 2 to entry: The mechanical functions are mainly characterised by the core, the external electrical functions are mainly characterised by the polymeric housing. The housing may cover the core completely or partly. In the latter case the exposed portions of the ceramic core are usually covered by glaze.

3.6

composite insulator with fibre reinforced plastic (FRP) solid core

composite insulators of which the core, covered by polymeric housing, is made of solid insulating polymeric material reinforced by fibres such as glass fibres

3.7

composite hollow insulator

insulator consisting of at least two insulating parts, namely a tube-shaped core, and a housing

Note 1 to entry: The housing may consist either of individual sheds mounted on the tube, with or without an intermediate sheath, or directly applied in one or several pieces onto the tube. A composite hollow insulator unit is permanently equipped with fixing devices or end fittings.

3.8

core

central insulating part of an insulator which provides the mechanical characteristics

Note 1 to entry: The housing and sheds are not part of the core.

[SOURCE: IEC 60050-471:2007, 471-01-03]

3.9

insulator trunk

central insulating part of an insulator from which the sheds project

Note 1 to entry: Also known as shank on smaller insulators.

[SOURCE: IEC 60050-471:2007, 471-01-11]

3.10

housing

external insulating part of a composite insulator providing the necessary creepage distance and protecting core from environment

[SOURCE: IEC 60050-471:2007, 471-01-09]

3.11

sheath

uniform and continuous tubular covering made of insulating material

[SOURCE: IEC 60050-151:2001, 151-12-41]

3.12

shed (of an insulator)

insulating part, projecting from the insulator trunk, intended to increase the creepage distance

Note 1 to entry: The shed can be with or without ribs.

[SOURCE: IEC 60050-471:2007, 471-01-15]

3.13

creepage distance

shortest distance or the sum of the shortest distances along the surface on an insulator between two conductive parts which normally have the operating voltage between them

Note 1 to entry: The surface of cement or of other non-insulating jointing material is not considered as forming part of the creepage distance.

[SOURCE: IEC 60050-471:2007, 471-01-04, modified (removal of Note 2 to entry)]

3.14

arcing distance

shortest distance in air external to the insulator between the metallic parts which normally have the operating voltage between them

[SOURCE: IEC 60050-471:2007, 471-01-01]

3.15

interfaces

surface between the different materials

Note 1 to entry: Various interfaces exist in composite insulators, e.g.:

- between housing and end fittings;
- between various parts of the housing; e.g. between separately manufactured sheds, or between sheath and sheds;
- between core and housing.
- between sealant and core
- between sealant and end fittings

3.16

end fitting

integral component or formed part of an insulator, intended to connect it to a supporting structure, or to a conductor, or to an item of equipment, or to another insulator

Note 1 to entry: Where the end fitting is metallic, the term "metal fitting" is normally used.

[SOURCE: IEC 60050-471:2007, 471-01-06, modified by the addition of a synonym]

3.17

coupling

part of the end fitting which transmits load to the hardware external to the insulator