

TECHNICAL SPECIFICATION

CONSOLIDATED VERSION

**Telecontrol equipment and systems -
Part 5-601: Transmission protocols - Conformance test cases for the
IEC 60870-5-101 companion standard**

get full document from standards.iteh.ai



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2026 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search -

webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms and definitions	6
4 Abbreviated terms	6
5 Conformance testing for IEC 60870-5-101	6
5.1 Overview and legend	6
5.2 Configuration parameters for IEC 60870-5-101	8
5.3 Verification of IEC 60870-5-101 communication	10
5.4 Conformance Test Procedures	43
5.5 Test results chart	85
5.6 Test results of command transmission	93
Figure 1 – Test procedure	7
Table 1 – Configuration Parameters for IEC 60870-5-101	8
Table 2 – Verification of the physical level	10
Table 3 – Verification of the Link Level	10
Table 4 – Verification of the Data Unit Identifier	14
Table 5 – Verification of the object address	14
Table 6 – Verification of ASDUs for process information in monitor (Normal) direction	15
Table 7 – Verification of ASDUs for process information in control (Normal) direction	34
Table 8 – Verification of ASDUs for system information in monitor (Normal) direction	36
Table 9 – Verification of ASDUs for system information in control (Normal) direction	36
Table 10 – Verification of ASDUs for parameters in control (Normal) direction	38
Table 11 – Verification of ASDUs for file transfer (in monitor (Normal) and control direction)	40
Table 12 – Link Layer Conformance Test Procedures	43
Table 13 – Data Unit Identifier Conformance Test Procedures	44
Table 14 – Information object address Conformance Test Procedures	45
Table 15 – Station initialization function (unbalanced systems) Conformance Test Procedures	46
Table 16 – Data acquisition by polling function (unbalanced systems) Conformance Test Procedures	50
Table 17 – Station initialization function (balanced systems) Conformance Test Procedures	51
Table 18 – Redundant link conformance test procedures	54
Table 19 – Cyclic data transmission function Conformance Test Procedures	55
Table 20 – Data acquisition through Read function Conformance Test Procedures	56
Table 21 – Acquisition of events function Conformance Test Procedures	57
Table 22 – General interrogation function Conformance Test Procedures	59
Table 23 – Clock synchronization function conformance test procedures	64
Table 24 – Command transmission function Conformance Test Procedures	66

Table 25 – Transmission of integrated totals (telecounting) function Conformance Test Procedures	73
Table 26 – Parameter loading function Conformance Test Procedures.....	77
Table 27 – Test procedure function Conformance Test Procedures.....	78
Table 28 – File transfer procedure function Conformance Test Procedures.....	79
Table 29 – Delay acquisition procedure function conformance test procedures	81
Table 30 – Additional Conformance Test Procedures	82
Table 31 – Negative Conformance Test Procedures.....	83
Table 32 – PIXIT related Conformance Test Procedures	84
Table 33 – Test results chart	85
Table 34 – Test results of single command transmission.....	94
Table 35 – Test results of double command transmission	95
Table 36 – Test results of regulating step command transmission.....	97
Table 37 – Test results of setpoint command transmission	99

Sample Document

get full document from standards.iteh.ai

INTERNATIONAL ELECTROTECHNICAL COMMISSION

Telecontrol equipment and systems - Part 5-601: Transmission protocols - Conformance test cases for the IEC 60870-5-101 companion standard

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 60870-5-601 edition 2.1 contains the second edition (2015-10) [documents 57/1528/DTS and 57/1590/RVC] and its amendment 1 (2026-09) [documents 57/2938/DTS and 57/2978/RVDTS].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- The subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

This technical specification is to be used in conjunction with IEC 60870-5-101:2003/AMD1:2015. IEC 60870-5-101:2003/AMD1:2015 resolves ambiguities and inconsistencies discovered by users of the standard and was worked out in parallel with IEC 60870-5-601:2006.

IEC 60870-5-601, which is a technical specification, has been prepared by IEC technical committee 57: Power systems management and associated information exchange.

This second edition cancels and replaces the first edition published in 2006. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- Resolving ambiguities and inconsistencies between IEC 60870-5-101:2003 and IEC TS 60870-5-601:2006;
- Enhancements and optimisation of test cases which are needed to prove conformance with IEC 60870-5-101:2003;
- Additional negative test cases made to avoid circulation of messages not conformant with IEC 60870-5-101:2003.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
57/1528/DTS	57/1590/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above Table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60870 series, under the general title *Telecontrol equipment and systems*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

1 Scope

This part of IEC 60870 describes test cases for conformance testing of telecontrol equipment, Substation Automation Systems (SAS) and telecontrol systems, including front-end functions of SCADA.

The use of this part of IEC 60870 facilitates interoperability by providing a standard method of testing protocol implementations, but it does not guarantee interoperability of devices. It is expected that using this part of IEC 60870 during testing will minimize the risk of non-interoperability.

The goal of this part of IEC 60870 is to enable unambiguous and standardised evaluation of IEC 60870-5 companion standard protocol implementations. The guidelines and conditions for the testing environment are described in IEC 60870-5-6. The detailed test cases per companion standard, containing among others mandatory and optional mandatory test cases per Basic Application Function, ASDU and transmission procedures, will become available as a technical specification (TS). Other functionality may need additional test cases but this is beyond the scope of this part of IEC 60870. For proper testing, it is recommended to define these additional test cases.

This part of IEC 60870 deals mainly with communication conformance testing; therefore other requirements, such as safety or EMC are not covered. These requirements are covered by other standards (if applicable) and the proof of compliance for these topics is done in accordance with these standards.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies¹.

IEC 60870-5-1:1990, *Telecontrol equipment and systems – Part 5: Transmission protocols – Section One: Transmission frame formats*

IEC 60870-5-2:1992, *Telecontrol equipment and systems – Part 5: Transmission protocols – Section 2: Link transmission procedures*

IEC 60870-5-3:1992, *Telecontrol equipment and systems – Part 5: Transmission protocols – Section 3: General structure of application data*

IEC 60870-5-4:1993, *Telecontrol equipment and systems – Part 5: Transmission protocols – Section 4: Definition and coding of application information elements*

IEC 60870-5-5:1999, *Telecontrol equipment and systems – Part 5: Transmission protocols – Section 5: Basic application functions*

¹ The base standard always takes precedence. In case of ambiguity between this part of IEC 60870 and the base standards (IEC 60870-5-1 to IEC 60870-5-5, IEC 60870-5-101), this part of IEC 60870 needs to be clarified or amended.

When testing negative behaviour is not described in the base standard, the behaviour described in this part of IEC 60870 shall prevail and shall be observed.

The conformance statement produced after testing shall indicate any lack of conformance to either the test plan or the base standard.

IEC 60870-5-6, *Telecontrol equipment and systems – Part 5-6: Guidelines for conformance testing for the IEC 60870-5 companion standards*

IEC 60870-5-101:2003, *Telecontrol equipment and systems – Part 5-101: Transmission protocols – Companion standard for basic telecontrol tasks*
IEC 60870-5-101:2003/AMD1:2015

IEEE 754, *Standard for Binary Floating-Point Arithmetic*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60870-5-6 apply.

4 Abbreviated terms

For the purposes of this document, the abbreviations given in IEC 60870-5-6 apply.

5 Conformance testing for IEC 60870-5-101

5.1 Overview and legend

Procedural and functional testing should always start with the Station Initialization function and proceeds with the next Basic Application Functions. The procedure in each test case should be followed, which means that the DUT is able to function as described in the specific test case.

The test procedures in Tables 1 to 14 should be tested with no errors detected during testing of all the Basic Application Functions in Tables 15 to 32. These tests are preferably automatically performed by the used test platform.

In addition to the performance criteria listed in the test procedures, Subclause 5.3 lists the protocol specifications that should be verified automatically by the testing software or verified manually by review of the test history log after execution of the test procedures. The verification should result in no errors detected during the complete test procedure.

This test plan has a direct reference to the PICS and possibly a PIXIT. Without a reference to a PICS or PIXIT, this test plan is obsolete.

Test case numbering syntax is Subclause number + Table number + test case number.

Test cases are mandatory depending on the description in the column 'Required'. The following situations are possible:

- M = Mandatory test case regardless if enabled in the PICS/PIXIT, not only in one situation but during execution of all the tests as in the PICS and/or PIXIT
- PICS, x.x = Mandatory test case if the functionality is enabled in the PICS (by marking the applicable check box), with a reference to the Subclause number of the PICS (x.x); For example: PICS 8.x always refers to IEC 60870-5-101:2003, Clause 8
- PIXIT = Mandatory test case if the functionality is enabled/described in the PIXIT. Verification of these test cases by the user/owner of the PIXIT is required before the test is started

For each test case, the test results need to be marked in the appropriate column of the test result chart in 5.5 and 5.6. Each test case can either pass the test (Passed), fail the test (Failed), be not applicable when the configuration value is not supported by the device (N.A.),

or the test case was not performed (Empty). Ideally there should be no empty boxes when testing is complete.

For testing reverse direction, the same test procedures apply in the opposite direction (replace "Controlling" with "Controlled" and vice versa), except for COT44-47 which are only defined in Monitor direction (only a controlled station is allowed to send these COT).

The test Tables are divided into five subclauses:

- Subclause 5.2, Configuration Parameters for IEC 60870-5-101
- Subclause 5.3, Verification of IEC 60870-5-101 communication
- Subclause 5.4, Conformance Test Procedures
- Subclause 5.5, Test Result Chart
- Subclause 5.6, Test Results of Command Transmission

The procedure to perform all the mandatory test cases according to the PID is shown in Figure 1.

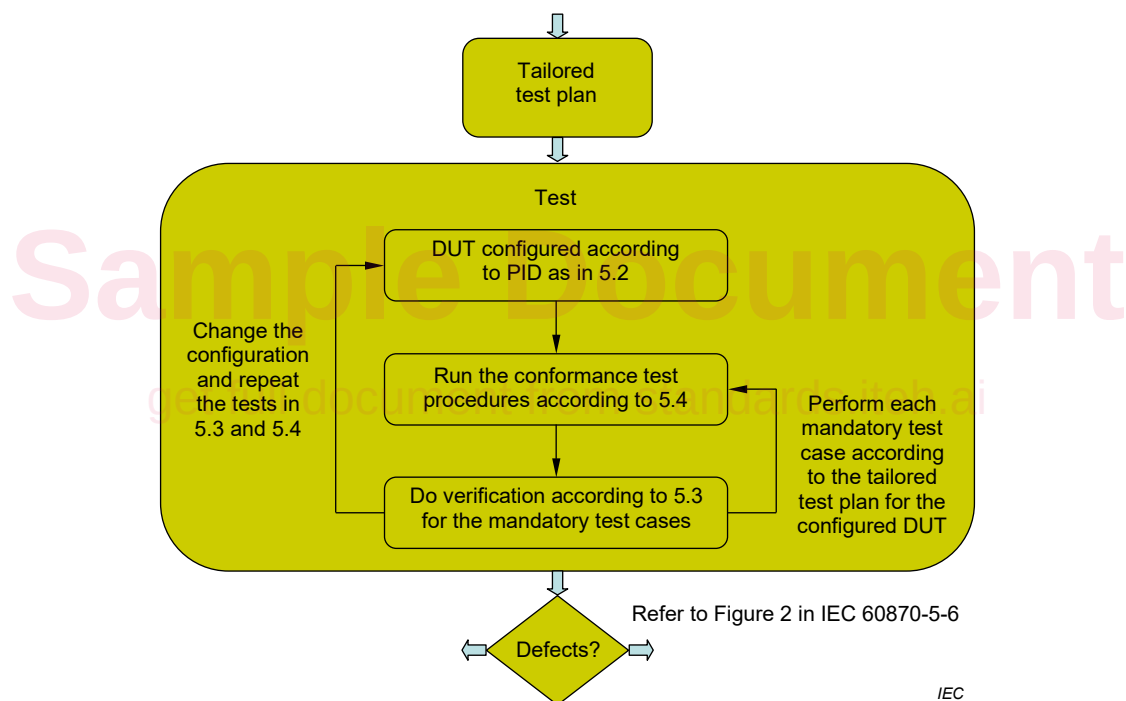


Figure 1 – Test procedure

5.2 Configuration parameters for IEC 60870-5-101

Since IEC 60870-5-101 contains a number of configuration parameters affecting protocol behaviour, it should be tested that the functionality in 5.3 and 5.4 is correct for the configuration(s) in Table 1.

Table 1 – Configuration Parameters for IEC 60870-5-101

Table 1a – Configuration Parameter Values

Test No.	Test	Description	Reference	Required
5.2.1.1	System definition	Controlling station test ~~(Master)~~		PICS, 8.1
5.2.1.2		Controlled station test ~~(Slave)~~		PICS, 8.1
5.2.1.20	Physical layer	Transmission speed(s) in control direction test maximum baud rate, minimum baud rate, and one other baud rate. Perform all applicable test cases for one baud rate. For the other tested baud rates, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.	IEC 60870-5-101, 5.1	PICS, 8.3
5.2.1.21		Transmission speed(s) in monitor direction test maximum baud rate, minimum baud rate, and one other baud rate. Perform all applicable test cases for one baud rate. For the other tested baud rates, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.	IEC 60870-5-101, 5.1	PICS, 8.3
5.2.1.30	Link Layer	Unbalanced transmission	IEC 60870-5-2, 6	PICS, 8.4
5.2.1.31		Balanced transmission	IEC 60870-5-2, 6	PICS, 8.4
5.2.1.40	Address field of the Link	Zero (0) octets for address field (balanced only)	IEC 60870-5-2, 5.1.3, 6.1.3	PICS, 8.4
5.2.1.41		One (1) octet for address field	IEC 60870-5-2, 5.1.3, 6.1.3	PICS, 8.4
5.2.1.42		Two (2) octets for address field	IEC 60870-5-2, 5.1.3, 6.1.3	PICS, 8.4
		If more than one link address length is supported (see PICS, 8.4), then perform all applicable test cases for one link address length. For the other link address lengths, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.		PICS, 8.4
5.2.1.50	Frame length	Maximum length L (control direction)	IEC 60870-5-101, 6.2	PICS, 8.4
5.2.1.51		Maximum length L (monitor direction)	IEC 60870-5-101, 6.2	PICS, 8.4
5.2.1.60	Assignment Class 2 messages	Standard assignment of class 2 messages	IEC 60870-5-101, 6.2, 7.4.2	PICS, 8.4
5.2.1.61		Special assignments of class 2 messages	IEC 60870-5-101, 6.2, 7.4.2	PIXIT

Table 1b – Conformance Test Procedures only for system testing (for example in the case of interoperability testing)

Test No.	Test	Description	Reference	Required
5.2.1.70	COMMON ADDRESS of ASDU	One (1) octet for Common Address of ASDU (CASDU)	IEC 60870-5-101, 7.2.4	PICS, 8.5
5.2.1.71		Two (2) octets for Common Address of ASDU (CASDU)	IEC 60870-5-101, 7.2.4	PICS, 8.5
		If more than one Common Address of ASDU length is supported (see PICS, 8.5), then perform all applicable test cases for one Common Address of ASDU length. For the other Common Address of ASDU length, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.		PICS, 8.5
5.2.1.80	INFORMATION OBJECT ADDRESS	One (1) octet for Information Object Address (structured or unstructured)	IEC 60870-5-101, 7.2.5	PICS, 8.5
5.2.1.81		Two (2) octets for Information Object Address (structured or unstructured)	IEC 60870-5-101, 7.2.5	PICS, 8.5
5.2.1.82		Three (3) octets for Information Object Address (structured or unstructured)	IEC 60870-5-101, 7.2.5	PICS, 8.5
		If more than one Information Object Address length is supported (see PICS, 8.5), then perform all applicable test cases for one Information Object Address length. For the other Information Object Address lengths, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.		PICS, 8.5
5.2.1.90	CAUSE OF TRANSMISSION	One (1) octet for COT field	IEC 60870-5-101, 7.2.3	PICS, 8.5
5.2.1.91		Two (2) octets for COT field (2 nd octet is Originator address)	IEC 60870-5-101, 7.2.3	PICS, 8.5
		If more than one Cause of Transmission length is supported (see PICS, 8.5), then perform all applicable test cases for one Cause of Transmission length. For the other Cause of Transmission length, perform the following test cases: 5.4.15.1/5.4.15.10 and 5.4.22.1.		PICS, 8.5
5.2.1.95	Total address length	If multiple values for the lengths of the Link address, Common Address of ASDU, Information Object Address or Cause of Transmission can be configured, then perform test cases 5.4.15.1/5.4.15.10 and 5.4.22.1 for the minimum possible total length.	IEC 60870-5-101, 7.2.3	PICS, 8.4 PICS, 8.5
5.2.1.96		If multiple values for the lengths of the Link address, Common Address of ASDU, Information Object Address or Cause of Transmission can be configured, then perform test cases 5.4.15.1/5.4.15.10 and 5.4.22.1 for the maximum possible total length.	IEC 60870-5-101, 7.2.3	PICS, 8.4 PICS, 8.5
5.2.1.100	System definition	System test (in case of interoperability testing)		PICS, 8.1
5.2.1.110	Network configuration	Point-to-point	IEC 60870-5-101, 5.1	PICS, 8.2
5.2.1.111		Multiple point-to-point	IEC 60870-5-101, 5.1	PICS, 8.2
5.2.1.112		Multipoint party line	IEC 60870-5-101, 5.1	PICS, 8.2
5.2.1.113		Multipoint star	IEC 60870-5-101, 5.1	PICS, 8.2
5.2.1.120	Address field of the Link	Link address unstructured	IEC 60870-5-2, 5.1.3, 6.1.3	PICS, 8.4
5.2.1.121		Link address structured	IEC 60870-5-2, 5.1.3, 6.1.3	PICS, 8.4, PIXIT
5.2.1.130	INFORMATION OBJECT ADDRESS	Information Object Address unstructured	IEC 60870-5-101, 7.2.5	PICS, 8.5
5.2.1.131		Information Object Address structured	IEC 60870-5-101, 7.2.5	PICS, 8.5 PIXIT

5.3 Verification of IEC 60870-5-101 communication

This subclause lists the protocol specifications that should be verified automatically by the testing software or verified manually by review of the test history log after execution of the test procedures. Each test case describes a functionality that has passed the test if the functionality as in the description column was proved to be correct. Correct means: the functionality should be checked either automatically or manually, and also be checked by the test engineer in a human readable format log-file. For example, to test the IV qualifier of some information elements, the ASDU containing this element should be sent with the IV=1. This should be automatically checked by the test software or observed by the test engineer in the log-file. Each test case marked "Passed", should be verifiable during testing and archived in log-files for post assessment.

To identify if a test case is mandatory, it is necessary to read 5.1 carefully.

Table 2 – Verification of the physical level

Test No.	Test	Description	Reference	Required
5.3.2.1	BYTEFRAME	Start-/stop-bit, even parity	IEC 60870-5-1:1990, 6.2.4.2	M

Table 3 – Verification of the Link Level (1 of 4)

Test No.	Test	Description	Reference	Required
5.3.3.10	FT1.2 FRAME LAYOUT (Single, Fixed and Variable)	Single control character I: E5 _H	IEC 60870-5-1:1990, 6.2.4.2	PIXIT
5.3.3.11		Start character of fixed length frames: 10 _H	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.12		0 octets (No User data) as Link User data length of fixed length frames	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.13		Start character of variable length frames: 68 _H	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.14		Configured number of octets L (repeated) as the maximum number of User Data octets from Controlling to Controlled station in variable length frames: max. 255	IEC 60870-5-1:1990, 6.2.4.2	PICS, 8.4 Frame length
5.3.3.15		Configured number of octets L (repeated) as the maximum number of User Data octets from Controlled to Controlling station in variable length frames: max. 255	IEC 60870-5-1:1990, 6.2.4.2	PICS, 8.4 Frame length
5.3.3.16		Second start character of variable length frames: 68 _H	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.17		Single octet Control Field	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.18		Configured number of octets for Link address field	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.19		Checksum (8-bit arithmetic sum)	IEC 60870-5-1:1990, 6.2.4.2	M
5.3.3.20		Stop character of fixed and variable length frames: 16 _H	IEC 60870-5-1:1990, 6.2.4.2	M

Table 3 (2 of 4)

Test No.	Test	Description	Reference	Required
5.3.3.30	BYTE LAG	Line idle intervals (stream of "1" bits) between characters of a frame do not exceed one bit time (octets are received within 110 % of raw transmission time)	IEC 60870-5-1:1990, 6.2.4.2 IEC 60870-5-101:2003, 6.1	M
5.3.3.40	CONTROL FIELD	High order bit RES = 0 (unbalanced only)	IEC 60870-5-2:1992, 5.1.2	PICS, 8.4 <i>Unbalanced</i>
5.3.3.41		DIR = 1 for messages from Controlling station (A) to Controlled station (B) (balanced only)	IEC 60870-5-2:1992, 6.1.2	PICS, 8.4 <i>Balanced</i>
5.3.3.42		DIR = 0 for messages from Controlled station (B) to Controlling station (A) (balanced only)	IEC 60870-5-2:1992, 6.1.2	PICS, 8.4 <i>Balanced</i>
5.3.3.43		PRM = 0 in messages from the Controlled station	IEC 60870-5-2:1992, 5.1.2, 6.1.2	M
5.3.3.44		PRM = 0: only FCODEs 0, 1, 8, 9, 11, 14, or 15 (unbalanced only)	IEC 60870-5-2:1992, 5.1.2	PICS, 8.4 <i>Unbalanced</i>
5.3.3.45		PRM = 0: only FCODEs 0, 1, 11, 14, or 15 (balanced only)	IEC 60870-5-2:1992, 6.1.2	PICS, 8.4 <i>Balanced</i>
5.3.3.46		PRM = 1 in messages from the Controlling station	IEC 60870-5-2:1992, 5.1.2, 6.1.2	M
5.3.3.47		PRM = 1: only Primary FCODEs 0, 1, 3, 4, 8, 9, 10 or 11 (unbalanced only)	IEC 60870-5-2:1992, 5.1.2	PICS, 8.4 <i>Unbalanced</i>
5.3.3.48		PRM = 1: only Primary FCODEs 0, 1, 2, 3, 4 or 9 (balanced only)	IEC 60870-5-2:1992, 6.1.2	PICS, 8.4 <i>Balanced</i>
5.3.3.49		In case of FCB = 1 and FCB unchanged, the last message is repeated	IEC 60870-5-2:1992, 5.1.2, 6.1.2	M
5.3.3.50		In case of reset commands F-CODE 0 or 1 FCB = 0 (expect next FCB=1)	IEC 60870-5-2:1992, 5.1.2, 6.1.2	M
5.3.3.51		DFC = 0: further messages are acceptable	IEC 60870-5-2:1992, 5.1.2, 6.1.2	M

Table 3 (3 of 4)

Test No.	Test	Description	Reference	Required
5.3.3.52		DFC = 1: further messages may cause data overflow. Only applicable for Balanced communication	IEC 60870-5-2:1992, 5.1.2, 6.3.3	PICS, 8.4 Balanced
NOTE The following tests are only for Unbalanced systems (PICS 8.4). If 'M' is mentioned, the test case is mandatory for unbalanced systems.				
5.3.3.60	UNBALANCED TRANSMISSION PROCEDURE	Unbalanced transmission	IEC 60870-5-2:1992, Clause 5	PICS, 8.4 Unbalanced
5.3.3.61		Service S1 – SEND/No reply	IEC 60870-5-2:1992, 4.1	PIXIT
5.3.3.62		Service S2 – SEND/CONFIRM expected	IEC 60870-5-2:1992, 4.2	M
5.3.3.63		Service S3 – REQUEST/RESPOND expected	IEC 60870-5-2:1992, 4.3	M
5.3.3.64		Primary F-CODE 0: answered with Secondary F-CODE 0,1,14,15	IEC 60870-5-2:1992, 4.2.2, 5.1.2	PIXIT
5.3.3.65		Primary F-CODE 1: answered with Secondary F-CODE 0,1,14,15	IEC 60870-5-2:1992, 4.2.2, 5.1.2	PIXIT
5.3.3.66		Primary F-CODE 3: answered with Secondary F-CODE 0,1,14,15	IEC 60870-5-2:1992, 4.2.2, 5.1.2	PIXIT
5.3.3.67		Primary F-CODE 4: not answered by Secondary	IEC 60870-5-2:1992, 4.1.2, 5.1.2	PIXIT
5.3.3.68		Primary F-CODE 8: answered with Secondary F-CODE 11, 14, 15	IEC 60870-5-2:1992, 4.3.2, 5.1.2	PIXIT
5.3.3.69		Primary F-CODE 9: answered with Secondary F-CODE 11, 14, 15	IEC 60870-5-2:1992, 4.3.2, 5.1.2	PIXIT
5.3.3.70		Primary F-CODE 10: answered with Secondary F-CODE 8, 9, 14, 15	IEC 60870-5-2:1992, 4.3.2, 5.1.2	PIXIT
5.3.3.71		Primary F-CODE 11: answered with Secondary F-CODE 8, 9, 14, 15	IEC 60870-5-2:1992, 4.3.2, 5.1.2	PIXIT
5.3.3.72		Primary F-CODE 2, 5...7, 12...15: answered with Secondary F-CODE 15	IEC 60870-5-2:1992, 4.2.2, 5.1.2	PIXIT
5.3.3.73		A not supported or implemented F-code is answered with Secondary F-CODE 14 or 15	IEC 60870-5-2:1992, 4.2.2, 5.1.2	M

Table 3 (4 of 4)

Test No.	Test	Description	Reference	Required
NOTE The following tests are only for Balanced systems (PICS 8.4). If 'M' is mentioned, the test case is mandatory for balanced systems.				
5.3.3.80	BALANCED TRANSMISSION PROCEDURE	Balanced transmission	IEC 60870-5-2:1992, Clause 6	PICS, 8.4 <i>Balanced</i>
5.3.3.81		Service S1 – SEND/No reply	IEC 60870-5-2:1992, 4.1	PIXIT
5.3.3.82		Service S2 – SEND/CONFIRM expected	IEC 60870-5-2:1992, 4.2	M
5.3.3.83		Service S3 – REQUEST/RESPOND expected	IEC 60870-5-2:1992, 4.3	M
5.3.3.84		Primary F-CODE 0: answered with Secondary F-CODE 0, 1, 14, 15	IEC 60870-5-2:1992, 4.2.2, 6.1.2	PIXIT
5.3.3.85		Primary F-CODE 1: answered with Secondary F-CODE 0, 1, 14, 15	IEC 60870-5-2:1992, 4.2.2, 6.1.2	PIXIT
5.3.3.86		Primary F-CODE 2: answered with Secondary F-CODE 0, 1, 14, 15	IEC 60870-5-2:1992, 4.1.2, 6.1.2	PIXIT
5.3.3.87		Primary F-CODE 3: answered with Secondary F-CODE 0, 1, 14, 15	IEC 60870-5-2:1992, 4.3.2, 6.1.2	PIXIT
5.3.3.88		Primary F-CODE 4: not answered by Secondary	IEC 60870-5-2:1992, 4.3.2, 6.1.2	PIXIT
5.3.3.89		Primary F-CODE 9: answered with Secondary F-CODE 11, 14, 15	IEC 60870-5-2:1992, 4.3.2, 6.1.2	PIXIT
5.3.3.90		Primary F-CODE 5...8, 10...15: answered with Secondary F-CODE 15	IEC 60870-5-2:1992, 4.2.2, 6.1.2	PIXIT
5.3.3.91		A not supported or implemented F-code is answered with Secondary F-CODE 14 or 15	IEC 60870-5-2:1992, 4.2.2, 6.1.2	M
5.3.3.100	TIME OUT INTERVAL	Maximum time out interval (calculated) – Controlling station does a retry when no answer is received – Controlled station answers always within specified time	IEC 60870-5-2:1992, Clause A.1, case 1, Figure A.2	PICS, 8.4
5.3.3.101		Controlling station uses the configured maximum number of retries for data link services that are unanswered within the time out interval	IEC 60870-5-2:1992, Clause 4	PICS, 8.4