
**Thermal bridges in building
construction — Heat flows and surface
temperatures — Detailed calculations**

*Ponts thermiques dans les bâtiments — Flux thermiques et
températures superficielles — Calculs détaillés*

Sample Document

get full document from standards.iteh.ai



Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols and subscripts	7
4.1 Symbols	7
4.2 Subscripts	7
5 Description of the method	8
5.1 Output	8
5.2 General description	8
6 Output data and input data	8
6.1 Output data	8
6.2 Calculation time intervals	9
6.3 Input data	9
7 Modelling of the construction	9
7.1 Dimension systems	9
7.2 Rules for modelling	9
7.2.1 General	9
7.2.2 Cut-off planes for a 3-D geometrical model for calculation of total heat flow and/or surface temperatures	9
7.2.3 Cut-off planes for a 2-D geometrical model	11
7.2.4 Cut-off planes in the ground	12
7.2.5 Periodic heat flows via the ground	13
7.2.6 Adjustments to dimensions	13
7.2.7 Auxiliary planes	15
7.2.8 Quasi-homogeneous layers and materials	15
7.3 Conditions for simplifying the geometrical model	15
7.3.1 General	15
7.3.2 Conditions for adjusting dimensions to simplify the geometrical model	16
7.3.3 Conditions for using quasi-homogeneous material layers to simplify the geometrical model	17
8 Input data specifications	20
8.1 General	20
8.2 Thermal conductivities of materials	21
8.3 Surface resistances	21
8.4 Boundary temperatures	21
8.5 Thermal conductivity of quasi-homogeneous layers	21
8.6 Equivalent thermal conductivity of air cavities	21
8.7 Determining the temperature in an adjacent unheated room	22
9 Calculation method	22
9.1 Solution technique	22
9.2 Calculation rules	22
9.2.1 Heat flows between material cells and adjacent environment	22
9.2.2 Heat flows at cut-off planes	22
9.2.3 Solution of the formulae	22
9.2.4 Calculation of the temperature distribution	23
10 Determination of thermal coupling coefficients and heat flow rate from 3-D calculations	23
10.1 Two boundary temperatures, unpartitioned model	23
10.2 Two boundary temperatures, partitioned model	23

10.3	More than two boundary temperatures.....	24
11	Calculations using linear and point thermal transmittances from 3-D calculations.....	25
11.1	Calculation of thermal coupling coefficient.....	25
11.2	Calculation of linear and point thermal transmittances.....	25
12	Determination of thermal coupling coefficient, heat flow rate and linear thermal transmittance from 2-D calculations.....	26
12.1	Two boundary temperatures.....	26
12.2	More than two boundary temperatures.....	26
12.3	Determination of the linear thermal transmittance.....	27
12.4	Determination of the linear thermal transmittance for wall/floor junctions.....	27
12.4.1	All cases.....	27
12.4.2	Option A.....	27
12.4.3	Option B.....	29
12.5	Determination of the external periodic heat transfer coefficient for ground floors.....	31
13	Determination of the temperature at the internal surface.....	32
13.1	Determination of the temperature at the internal surface from 3-D calculations.....	32
13.1.1	Two boundary temperatures.....	32
13.1.2	More than two boundary temperatures.....	32
13.2	Determination of the temperature at the internal surface from 2-D calculations.....	33
13.2.1	Two boundary temperatures.....	33
13.2.2	Three boundary temperatures.....	33
14	Report.....	33
14.1	Input data.....	33
14.2	Output data.....	34
14.2.1	General.....	34
14.2.2	Calculation of the heat transmission using the thermal coupling coefficient.....	34
14.2.3	Calculation of the surface temperatures using weighting factors.....	34
14.2.4	Additional output data.....	34
14.2.5	Estimate of error.....	35
Annex A (normative)	Input and method selection data sheet — Template.....	36
Annex B (informative)	Input and method selection data sheet — Default choices.....	38
Annex C (normative)	Validation of calculation methods.....	40
Annex D (normative)	Examples of the determination of the linear and point thermal transmittances.....	47
Annex E (normative)	Determination of values of thermal coupling coefficient and temperature weighting factor for more than two boundary temperatures.....	50
Bibliography		55

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

ISO 10211 was prepared by ISO Technical Committee ISO/TC 163, *Thermal performance and energy use in the built environment*, Subcommittee SC 2, *Calculation methods*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 89, *Thermal performance of buildings and building components*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 10211:2007), which has been technically revised.

The changes in the second edition are mostly editorial. The standard has been re-drafted according to CEN/TS 16629:2014.

Introduction

This document is part of a series aimed at the international harmonization of the methodology for assessing the energy performance of buildings. Throughout, this series is referred to as a “set of EPB standards”.

All EPB standards follow specific rules to ensure overall consistency, unambiguity and transparency.

All EPB standards provide a certain flexibility with regard to the methods, the required input data and references to other EPB standards, by the introduction of a normative template in [Annex A](#) and [Annex B](#) with informative default choices.

For the correct use of this document, a normative template is given in [Annex A](#) to specify these choices. Informative default choices are provided in [Annex B](#).

The main target groups for this document are architects, engineers and regulators.

Use by or for regulators: In case the document is used in the context of national or regional legal requirements, mandatory choices may be given at national or regional level for such specific applications. These choices (either the informative default choices from [Annex B](#) or choices adapted to national/regional needs, but in any case following the template of [Annex A](#)) can be made available as national annex or as separate (e.g. legal) document (national data sheet).

NOTE 1 So in this case:

- the regulators will specify the choices;
- the individual user will apply the document to assess the energy performance of a building, and thereby use the choices made by the regulators.

Topics addressed in this document can be subject to public regulation. Public regulation on the same topics can override the default values in [Annex B](#). Public regulation on the same topics can even, for certain applications, override the use of this document. Legal requirements and choices are in general not published in standards but in legal documents. In order to avoid double publications and difficult updating of double documents, a national annex may refer to the legal texts where national choices have been made by public authorities. Different national annexes or national data sheets are possible, for different applications.

It is expected, if the default values, choices and references to other EPB standards in [Annex B](#) are not followed due to national regulations, policy or traditions, that:

- national or regional authorities prepare data sheets containing the choices and national or regional values, according to the model in [Annex A](#). In this case a national annex (e.g. NA) is recommended, containing a reference to these data sheets;
- or, by default, the national standards body will consider the possibility to add or include a national annex in agreement with the template of [Annex A](#), in accordance to the legal documents that give national or regional values and choices.

Further target groups are parties wanting to motivate their assumptions by classifying the building energy performance for a dedicated building stock.

More information is provided in the Technical Report accompanying this document (ISO/TR 52019-2).

The subset of EPB standards prepared under the responsibility of ISO/TC 163/SC 2 cover *inter alia*:

- calculation procedures on the overall energy use and energy performance of buildings;
- calculation procedures on the internal temperature in buildings (e.g. in case of no space heating or cooling);
- indicators for partial EPB requirements related to thermal energy balance and fabric features;

- calculation methods covering the performance and thermal, hygrothermal, solar and visual characteristics of specific parts of the building and specific building elements and components, such as opaque envelope elements, ground floor, windows and facades.

ISO/TC 163/SC 2 cooperates with other technical committees for the details on appliances, technical building systems, indoor environment, etc.

This document sets out the specifications for a geometrical model of a thermal bridge for the numerical calculation of linear thermal transmittances, point thermal transmittances and internal surface temperatures.

[Table 1](#) shows the relative position of this document within the set of EPB standards in the context of the modular structure as set out in ISO 52000-1.

NOTE 2 In ISO/TR 52000-2 the same table can be found, with, for each module, the numbers of the relevant EPB standards and accompanying technical reports that are published or in preparation.

NOTE 3 The modules represent EPB standards, although one EPB standard could cover more than one module and one module could be covered by more than one EPB standard, for instance, a simplified and a detailed method respectively. See also [Tables A.1](#) and [B.1](#).

Table 1 — Position of this document (*in casu* M2–5) within the modular structure of the set of EPB standards

Sub-module	Overarching		Building (as such)		Technical Building Systems									
	Descriptions		Descriptions		Descriptions	Heat-ing	Cool-ing	Ven-tila-tion	Humidi-fication	Dehu-midifi-cation	Domestic hot water	Lighting	Building automa-tion and control	PV, wind, ..
sub1		M1		M2		M3	M4	M5	M6	M7	M8	M9	M10	M11
1	General		General		General									
2	Common terms and definitions; symbols, units and subscripts		Building energy needs		Needs								a	
3	Applications		(Free) indoor conditions without systems		Maximum load and power									
4	Ways to express energy performance		Ways to express energy performance		Ways to express energy performance									
5	Building categories and building boundaries		Heat transfer by transmission	ISO 10211	Emission and control									

^a The shaded modules are not applicable.

Table 1 (continued)

Overarching		Building (as such)		Technical Building Systems										
Sub-module	Descriptions		Descriptions		Descriptions	Heating	Cooling	Ventilation	Humidification	Dehumidification	Domestic hot water	Lighting	Building automation and control	PV, wind, ..
sub1		M1		M2		M3	M4	M5	M6	M7	M8	M9	M10	M11
6	Building occupancy and operating conditions		Heat transfer by infiltration and ventilation		Distribution and control									
7	Aggregation of energy services and energy carriers		Internal heat gains		Storage and control									
8	Building zoning		Solar heat gains		Generation and control									
9	Calculated energy performance		Building dynamics (thermal mass)		Load dispatching and operating conditions									
10	Measured energy performance		Measured energy performance		Measured Energy Performance									
11	Inspection		Inspection		Inspection									
12	Ways to express indoor comfort				BMS									
13	External environment conditions													
14	Economic calculation													
^a The shaded modules are not applicable.														

Thermal bridges in building construction — Heat flows and surface temperatures — Detailed calculations

1 Scope

This document sets out the specifications for a three-dimensional and a two-dimensional geometrical model of a thermal bridge for the numerical calculation of

- heat flows, in order to assess the overall heat loss from a building or part of it, and
- minimum surface temperatures, in order to assess the risk of surface condensation.

These specifications include the geometrical boundaries and subdivisions of the model, the thermal boundary conditions, and the thermal values and relationships to be used.

This document is based upon the following assumptions:

- all physical properties are independent of temperature;
- there are no heat sources within the building element.

This document can also be used for the derivation of linear and point thermal transmittances and of surface temperature factors.

NOTE Table 1 in the Introduction shows the relative position of this document within the set of EPB standards in the context of the modular structure as set out in ISO 52000-1.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6946, *Building components and building elements — Thermal resistance and thermal transmittance — Calculation method*

ISO 7345, *Thermal insulation — Physical quantities and definitions*

ISO 13370, *Thermal performance of buildings — Heat transfer via the ground — Calculation methods*

ISO 13788, *Hygrothermal performance of building components and building elements — Internal surface temperature to avoid critical surface humidity and interstitial condensation — Calculation methods*

ISO 10456, *Building materials and products — Hygrothermal properties — Tabulated design values and procedures for determining declared and design thermal values*

ISO 13789, *Thermal performance of buildings — Transmission and ventilation heat transfer coefficients — Calculation method*

ISO 52000-1:2017, *Energy performance of buildings — Overarching EPB assessment — Part 1: General framework and procedures*

NOTE 1 Default references to EPB standards other than ISO 52000-1 are identified by the EPB module code number and given in [Annex A](#) (normative template in Table A.1) and [Annex B](#) (informative default choice in Table B.1).

EXAMPLE EPB module code number: M5-5, or M5-5,1 (if module M5-5 is subdivided), or M5-5/1 (if reference to a specific clause of the standard covering M5-5).

NOTE 2 In this document, there are no choices in references to other EPB standards. The sentence and note above is kept to maintain uniformity between all EPB standards.

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 7345, ISO 52000-1, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 thermal bridge

part of the building envelope where the otherwise uniform thermal resistance is significantly changed by full or partial penetration of the building envelope by materials with a different thermal conductivity, and/or a change in thickness of the fabric, and/or a difference between internal and external areas, such as occur at wall/floor/ceiling junctions

3.2 linear thermal bridge

thermal bridge (3.1) with a uniform cross-section along one of the three orthogonal axes

3.3 point thermal bridge

localized *thermal bridge* (3.1) whose influence can be represented by a *point thermal transmittance* (3.20)

3.4 three-dimensional geometrical model

3-D geometrical model

geometrical model, deduced from building plans, such that for each of the orthogonal axes, the cross-section perpendicular to that axis changes within the boundary of the model

Note 1 to entry: See [Figure 1](#).

3.5 three-dimensional flanking element

3-D flanking element

part of a *3-D geometrical model* (3.4) which, when considered in isolation, can be represented by a *2-D geometrical model* (3.7)

Note 1 to entry: See [Figure 1](#) and [Figure 2](#).

3.6 three-dimensional central element

3-D central element

part of a *3-D geometrical model* (3.4) which is not a *3-D flanking element* (3.5)

Note 1 to entry: See [Figure 1](#).

Note 2 to entry: A central element is represented by a *3-D geometrical model* (3.4).

3.7**two-dimensional geometrical model****2-D geometrical model**

geometrical model, deduced from building plans, such that for one of the orthogonal axes, the cross-section perpendicular to that axis does not change within the boundaries of the model

Note 1 to entry: See [Figure 2](#).

Note 2 to entry: A 2-D geometrical model is used for two-dimensional calculations.

3.8**two-dimensional flanking element****2-D flanking element**

part of a *2-D geometrical model* ([3.7](#)) which, when considered in isolation, consists of plane, parallel material layers

Note 1 to entry: The plane, parallel material layers can be homogeneous or non-homogeneous.

3.9**two-dimensional central element****2-D central element**

part of a *2-D geometrical model* ([3.7](#)) which is not a *2-D flanking element* ([3.8](#))

3.10**construction plane**

plane in the *3-D geometrical model* ([3.4](#)) or *2-D geometrical model* ([3.7](#)) which separates different materials, and/or the geometrical model from the remainder of the construction, and/or the flanking elements from the central element

Note 1 to entry: See [Figure 3](#).

3.11**cut-off plane**

construction plane ([3.10](#)) that is a boundary to the *3-D geometrical model* ([3.4](#)) or *2-D geometrical model* ([3.7](#)) by separating the model from the remainder of the construction

Note 1 to entry: See [Figure 3](#).

3.12**auxiliary plane**

plane which, in addition to the *construction planes* ([3.10](#)), divides the geometrical model into a number of cells

3.13**quasi-homogeneous layer**

layer which consists of two or more materials with different thermal conductivities, but which can be considered as homogeneous with an equivalent thermal conductivity

Note 1 to entry: See [Figure 4](#).

3.14**temperature factor at the internal surface**

difference between internal surface temperature and external temperature, divided by the difference between internal temperature and external temperature, calculated with a surface resistance R_{si} at the internal surface

3.15**temperature weighting factor**

weighting factor which states the respective influence of the temperatures of the different thermal environments upon the surface temperature at the point under consideration

3.16

external boundary temperature

external air temperature, assuming that the air temperature and the radiant temperature seen by the surface are equal

3.17

internal boundary temperature

operative temperature, taken as the arithmetic mean value of internal air temperature and mean radiant temperature of all surfaces surrounding the internal environment

3.18

thermal coupling coefficient

heat flow rate per temperature difference between two environments which are thermally connected by the construction under consideration

3.19

linear thermal transmittance

heat flow rate in the steady-state compared to a reference heat flow rate calculated disregarding the *thermal bridge* (3.1), divided by length and by the temperature difference between the environments on either side of a *linear thermal bridge* (3.2)

Note 1 to entry: The linear thermal transmittance is a quantity describing the influence of a linear thermal bridge on the total heat flow.

3.20

point thermal transmittance

heat flow rate in the steady-state compared to a reference heat flow rate calculated disregarding the *thermal bridge* (3.1), divided by the temperature difference between the environments on either side of a *point thermal bridge* (3.3)

Note 1 to entry: The point thermal transmittance is a quantity describing the influence of a point thermal bridge on the total heat flow.


3.21

EPB standard

standard that complies with the requirements given in ISO 52000-1, CEN/TS 16628[5] and CEN/TS 16629[6]

Note 1 to entry: These three basic EPB documents were developed under a mandate given to CEN by the European Commission and the European Free Trade Association and support essential requirements of EU Directive 2010/31/EU on the energy performance of buildings. Several EPB standards and related documents are developed or revised under the same mandate.

[SOURCE: ISO 52000-1:2017, 3.5.14]

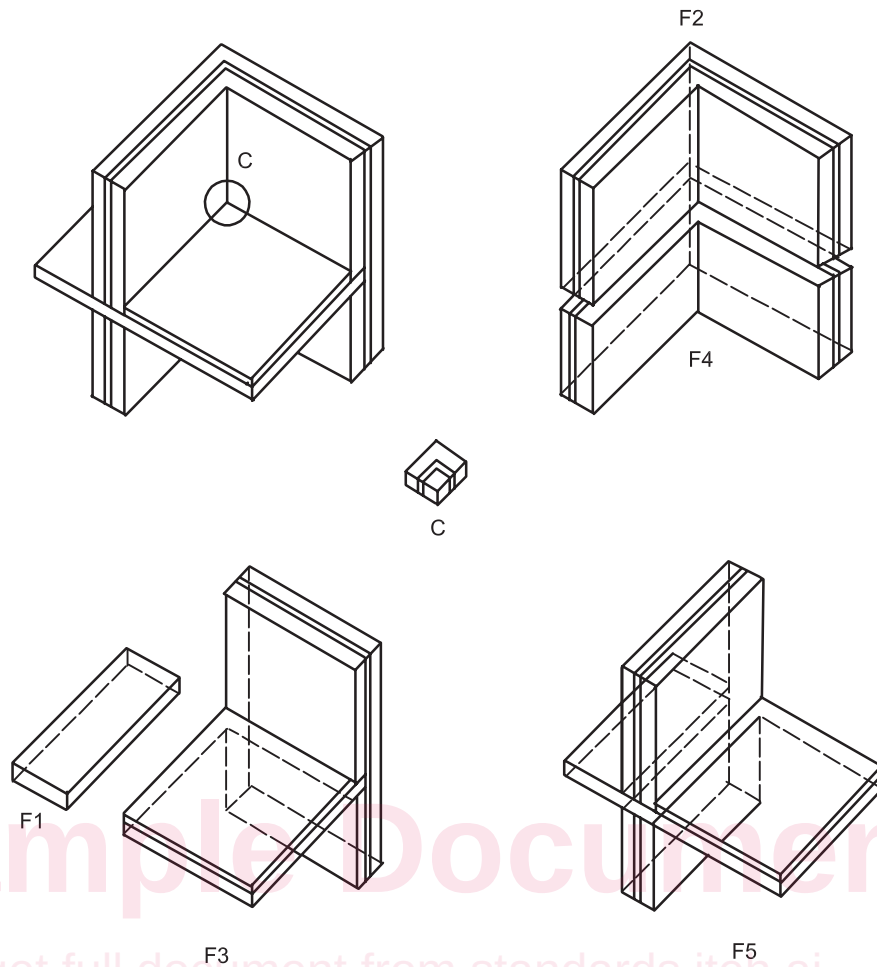
**Key**

F1, F2, F3, F4, F5 3-D flanking elements

C 3-D central element

NOTE 3-D Flanking elements have constant cross-sections perpendicular to at least one axis; the 3-D central element is the remaining part.


Figure 1 — 3-D geometrical model with five 3-D flanking elements and one 3-D central element

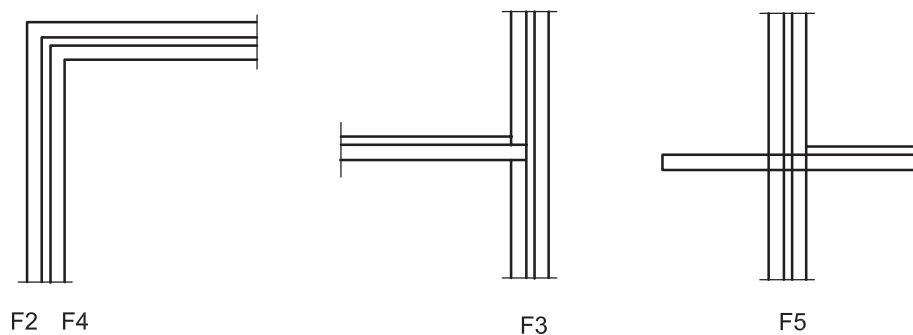**Key**

F1, F2, F3, F4, F5 3-D flanking elements

NOTE F2 to F5 refer to [Figure 1](#).

Figure 2 — Cross-sections of the 3-D flanking elements in a 3-D geometrical model treated as 2-D geometrical models

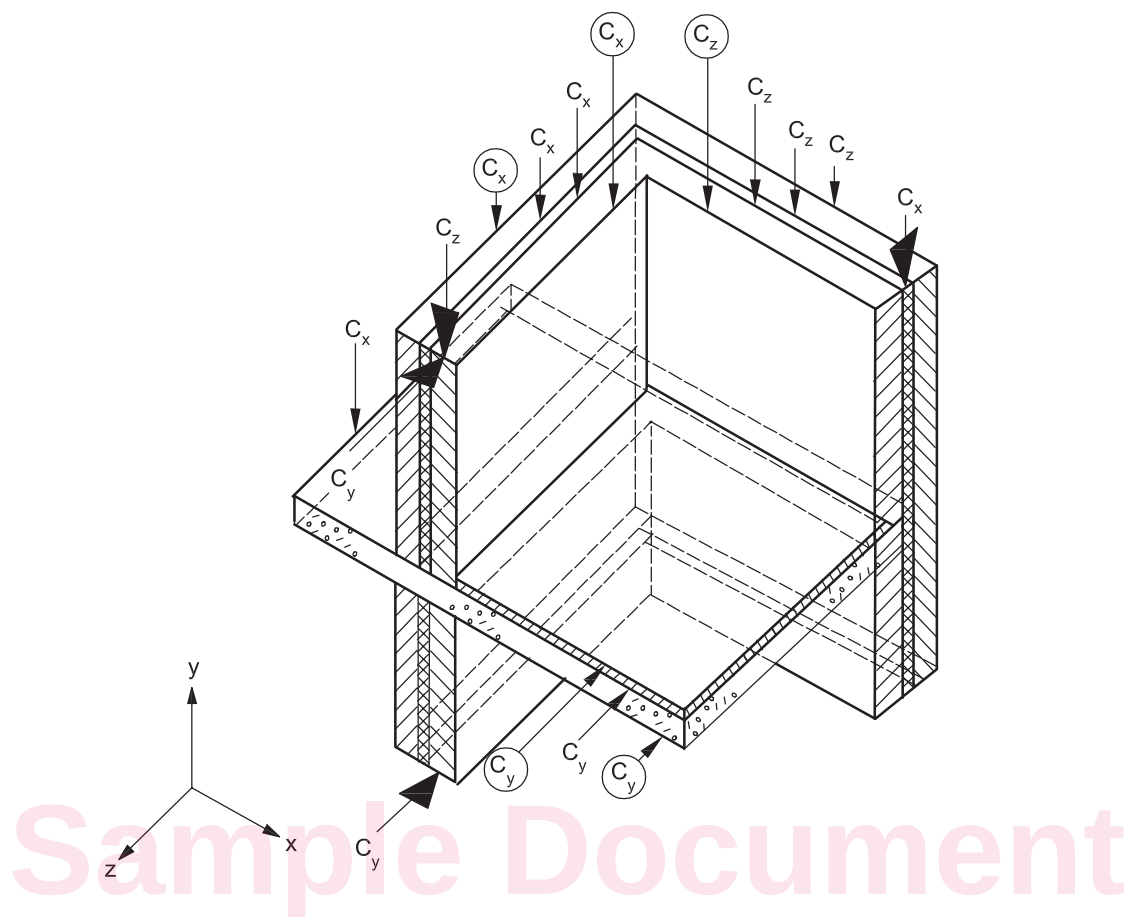

Key

C_x construction planes perpendicular to the x-axis

C_y construction planes perpendicular to the y-axis

C_z construction planes perpendicular to the z-axis

NOTE Cut-off planes are indicated with enlarged arrows; planes that separate flanking elements from central element are encircled.

Figure 3 — Example of a 3-D geometrical model showing construction planes

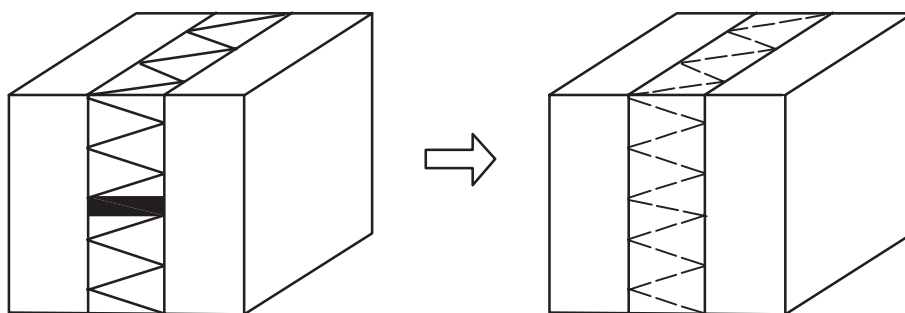


Figure 4 — Example of a minor point thermal bridge giving rise to three-dimensional heat flow, incorporated into a quasi-homogeneous layer

4 Symbols and subscripts

4.1 Symbols

For the purposes of this document, the symbols given in ISO 52000-1 and the following apply.

Symbol	Quantity	Unit
A	area	m^2
B	characteristic dimension of floor	m
b	width	m
d	thickness	m
f	temperature factor at the internal surface	—
g	temperature weighting factor	—
h	height	m
L	thermal coupling coefficient	$\text{W}/(\text{m}\cdot\text{K})$
L_{2D}	thermal coupling coefficient from two-dimensional calculation	$\text{W}/(\text{m}\cdot\text{K})$
L_{3D}	thermal coupling coefficient from three-dimensional calculation	W/K
l	length	m
N	number	—
q	density of heat flow rate	W/m^2
R	thermal resistance	$\text{m}^2\cdot\text{K}/\text{W}$
T	thermodynamic temperature	K
t	time	month
U	thermal transmittance	$\text{W}/(\text{m}^2\cdot\text{K})$
V	volume	m^3
w	wall thickness	m
z	depth of floor surface below ground level	m
Φ	heat flow rate	W
λ	thermal conductivity	$\text{W}/(\text{m}\cdot\text{K})$
θ	Celsius temperature	$^{\circ}\text{C}$
$\Delta\theta$	temperature difference	K
χ	point thermal transmittance	W/K
ψ	linear thermal transmittance	$\text{W}/(\text{m}\cdot\text{K})$

4.2 Subscripts

For the purposes of this document, the subscripts given in ISO 52000-1 and the following apply.

Subscript	Definition
b	basement, below ground level
c	component
e	external
f	floor
g	air layer, air gap (8.6)
g	ground (12.4)
ie	from internal to external
iu	from internal to unheated
int	internal