

Second edition
2016-10-15

Corrected version
2017-02

**Mechanical vibration — Laboratory
method for evaluating vehicle seat
vibration —**

**Part 1:
Basic requirements**

*Vibrations mécaniques — Méthode en laboratoire pour l'évaluation
des vibrations du siège de véhicule —*

Partie 1: Exigences de base

Sample Document

get full document from standards.iteh.ai



Reference number
ISO 10326-1:2016(E)

© ISO 2016

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General	2
5 Instrumentation	2
5.1 Acceleration transducers.....	2
5.2 Transducer mounting.....	2
5.2.1 General.....	2
5.2.2 Transducer mounting on the platform.....	3
5.2.3 Transducer mounting on the seat pan and/or backrest.....	3
5.3 Frequency weighting.....	4
5.4 Calibration.....	4
6 Vibration equipment	4
6.1 Physical characteristics.....	4
6.2 Control system.....	5
7 Safety requirements	5
8 Test conditions	5
8.1 Test seat.....	5
8.1.1 General.....	5
8.1.2 Run-in periods for suspension seats.....	5
8.1.3 Measurement of suspension travel and adjustment to weight of test person.....	6
8.1.4 Inclination of backrest.....	7
8.2 Test persons and posture.....	7
8.3 Other possibilities.....	8
9 Test input vibration	9
9.1 General.....	9
9.2 Simulated input vibration test.....	9
9.3 Tolerances on input vibration.....	10
9.4 Transfer function with sinusoidal vibration input.....	10
9.5 Damping test.....	10
9.5.1 Suspension seats.....	10
9.5.2 Other seats.....	11
10 Test procedure	11
10.1 General.....	11
10.2 Simulated input vibration test.....	11
10.3 Damping test.....	12
11 Acceptance	12
12 Test report	12
Annex A (informative) Test method for assessing the ability of a seat suspension to control the effects of impacts caused by over-travel	14
Annex B (informative) Example of a simulated input test signal specified by the PSD	20
Bibliography	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 4, *Human exposure to mechanical vibration and shock*.

This second edition cancels and replaces the first edition (ISO 10326-1:1992), which has been technically revised. It also incorporates the amendments ISO 10326-1:1992/Amd 1:2007 and ISO 10326-1:1992/Amd 2:2011.

A list of all parts in the ISO 10326 series can be found on the ISO website.

This corrected version of ISO 10326-1:2016 incorporates the following correction.

- A.3.5 The corrupted symbol Å was replaced with the correct symbol π in six instances.

Introduction

Drivers, staff and passengers of vehicles (land, air or water) and mobile machinery are exposed to mechanical vibration which interferes with their comfort, working efficiency and, in some circumstances, safety and health. Such vehicles and mobile machines are often fitted with seats that are designed and made in accordance with current state-of-the-art with regard to their capacity to control or reduce transmitted whole-body vibration.

To assist in the development of such seats, specific test codes have been, or are being, produced to evaluate the performance of seats. The following basic requirements have therefore been developed to give guidance for the specification of laboratory testing of vibration transmission through a vehicle seat to the occupant and for the evaluation of the ability of a seat to control the shock arising from over-travel of the suspension.

The seat constitutes the last stage of suspension before the driver. To be efficient at attenuating the vibration, the suspension seat should be chosen according to the dynamic characteristics of the vehicle. Any performance criteria provided should be set in accordance with what is attainable using best design practice. Such criteria do not necessarily ensure the complete protection of the operator against risks associated with exposure to vibration and shock which are generally believed to be risk of spinal injury.

Sample Document

get full document from standards.iteh.ai

Sample Document

get full document from standards.iteh.ai

Mechanical vibration — Laboratory method for evaluating vehicle seat vibration —

Part 1: Basic requirements

1 Scope

This document specifies basic requirements for the laboratory testing of vibration transmission through a vehicle seat to the occupant. These methods for measurement and analysis make it possible to compare test results from different laboratories for equivalent seats.

It specifies the test method, the instrumentation requirements, the measuring assessment method and the way to report the test result.

This document applies to specific laboratory seat tests which evaluate vibration transmission to the occupants of any type of seat used in vehicles and mobile off-road machinery.

Application standards for specific vehicles refer to this document when defining the test input vibration that is typical for the vibration characteristics of the type or class of vehicle or machinery in which the seat is to be fitted.

NOTE Examples of application standards are given in the bibliography.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2631-1, *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration — Part 1: General requirements*

ISO 5347 (all parts), *Methods for the calibration of vibration and shock pick-ups*

ISO 8041, *Human response to vibration — Measuring instrumentation*

ISO 13090-1, *Mechanical vibration and shock — Guidance on safety aspects of tests and experiments with people — Part 1: Exposure to whole-body mechanical vibration and repeated shock*

ISO 16063 (all parts), *Methods for the calibration of vibration and shock transducers*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 General

The measurement and assessment methods given in this document comply with the present practice standardized in ISO 2631-1. The measuring equipment and the frequency weightings shall be in accordance with ISO 8041.

The primary test for the vibration characteristics of the seat involves measurements under conditions which simulate the range of actual uses of a vehicle or machine. For applications where occasional severe shocks or transient vibration can be expected (and in particular for seats whose suspension travel is short, such as those intended for use on industrial trucks or off-road vehicles), in addition to the damping test, a secondary test is required to ensure that the seat responds acceptably. Machinery-specific standards shall give guidance on the need for this secondary test which comprises a method for assessing the accelerations associated with impact with the suspension end-stops when over-travel occurs. The test is described in [Annex A](#).

5 Instrumentation

5.1 Acceleration transducers

The measuring systems selected for the evaluation of vibration at the seat mounting base or platform of the vibration simulator and that selected for the evaluation of vibration transmitted to the seat occupant, or to an inert mass when used, shall have similar characteristics.

The characteristics of the vibration measuring system, accelerometers, signal conditioning and data acquisition equipment, including recording devices, shall be specified in the relevant application standard, especially the dynamic range, sensitivity, accuracy, linearity and overload capacity.

5.2 Transducer mounting

5.2.1 General

One accelerometer for each required test direction shall be located on the platform (P) at the place of the vibration transmission to the seat. The other accelerometer(s) shall be located at the interface between the human body and the seat, at either the seat pan (S) and/or the backrest (B) (see [Figure 1](#)).

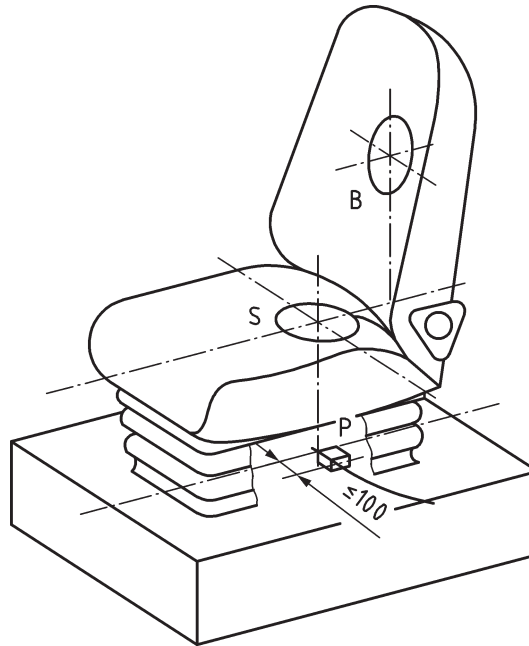


Figure 1 — Location of the accelerometers on the platform (P), on the seat pan (S) and on the backrest (B)

5.2.2 Transducer mounting on the platform

The accelerometer(s) on the platform shall be located within a circle with a diameter of 200 mm centred directly below the seat accelerometer(s). The measuring directions shall be aligned parallel to the movement of the platform.

5.2.3 Transducer mounting on the seat pan and/or backrest

The accelerometers on the seat pan shall be attached in the centre of a mounting disc with a total diameter of $250 \text{ mm} \pm 50 \text{ mm}$. The disc shall be as thin as possible (see [Figure 2](#)). The height shall not be more than 12 mm. This semi-rigid mounting disc of approximately 80 durometer to 90 durometer units (A-scale) moulded rubber or plastics material shall have a centre cavity in which to place the accelerometers. The accelerometers shall be attached to a thin metal disc with a thickness of $1,5 \text{ mm} \pm 0,2 \text{ mm}$ and a diameter of $75 \text{ mm} \pm 5 \text{ mm}$.

The mounting disc shall be placed on the surface of the seat pan and taped to the cushion in such a way that the accelerometers are located midway between the ischial tuberosities of the seat occupant with a tolerance to be defined in the relevant application standards. Alternative positioning of the disc may be recommended for certain applications. Any variation from the position here defined shall be specified in application standards.

When tests are performed without a person sitting on the seat, e.g. during damping tests, the disc shall be placed in the same position as if a person were seated in the seat.

If measurements are made on the backrest, the accelerometers shall be (horizontally) located in the vertical longitudinal plane through the centre-line of the seat. The relevant application standards shall specify the vertical position of the accelerometers. The measurement axes shall be aligned parallel to the basicentric coordinate system.

Besides the semi-rigid mounting disc recommended for soft or highly contoured cushions, a rigid disc with a generally flat surface or an individual-form design may be used. Such discs may be, for instance, required for testing rail vehicle passenger seats. The transducer mounting should be made of low-mass