
**Safety of machinery — Permanent
means of access to machinery —**

**Part 3:
Stairs, stepladders and guard-rails**

*Sécurité des machines — Moyens d'accès permanents aux
machines —*

Partie 3: Escaliers, échelles à marches et garde-corps

Sample Document

get full document from standards.iteh.ai



Reference number
ISO 14122-3:2016(E)

© ISO 2016

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General requirements	6
4.1 Construction and materials.....	6
4.2 Design and construction for the structure and the steps.....	6
5 Specific requirements applicable to stairs	6
6 Specific requirements applicable to step ladders	7
7 Specific requirements applicable to guard-rails	9
7.1 Guard-rails for platforms, walkways and stair landings.....	9
7.2 Guard-rails and handrails for stairs and handrails for step ladders.....	11
7.3 Additional fall-protection when steps, stairs or ladders are near guard-rails of working platforms.....	13
7.4 Gates.....	13
8 Verification of safety requirements	14
8.1 General.....	14
8.2 Testing of guard-rails.....	14
8.2.2 Testing procedure.....	16
8.3 Testing of steps of a stair.....	17
8.4 Testing of stepladders.....	19
Annex A (informative) Significant technical changes between this part of ISO 14122 and the previous edition	20
Bibliography	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 199, *Safety of machinery*.

This second edition cancels and replaces the first edition (ISO 14122-3:2001) which has been technically revised. It also incorporates the Amendment ISO 14122-3:2001/Amd 1:2010.

ISO 14122 consists of the following parts, under the general title *Safety of machinery — Permanent means of access to machinery*:

- *Part 1: Choice of fixed means and general requirements of access*
- *Part 2: Working platforms and walkways*
- *Part 3: Stairs, stepladders and guard-rails*
- *Part 4: Fixed ladders*

An additional part, dealing with mobile machinery, is under preparation.

Introduction

This International Standard is a type-B standard as stated in ISO 12100. It is relevant, in particular, for the following stakeholder groups representing the market players with regard to machinery safety:

- machine manufacturers (small, medium and large enterprises);
- health and safety bodies (regulators, accident prevention organizations, market surveillance, etc.).

Others can be affected by the level of machinery safety achieved with the means of this International Standard by the above-mentioned stakeholder groups:

- machine users/employers (small, medium and large enterprises);
- machine users/employees (e.g. trade unions, organizations for peoples with special needs);
- service providers, e.g. for maintenance (small, medium and large enterprises);
- consumers (in case of machinery intended for use by consumers).

The above-mentioned stakeholder groups have been given the possibility to participate at the drafting process of this International Standard.

In addition, this International Standard is intended for standardization bodies elaborating type-C standards. The requirements of this International Standard can be supplemented or modified by a type-C standard.

For machines which are covered by the scope of a type-C standard and which have been designed and built according to the requirements of that standard, the requirements of that type-C standard take precedence.

The purpose of this International Standard is to define the general requirements for safe access to machines. ISO 14122-1 gives guidance about the correct choice of access means when the necessary access to the machine is not possible directly from the ground level or from a floor or platform.

The dimensions specified are consistent with established ergonomic data given in ISO 15534-3.

Sample Document

get full document from standards.iteh.ai

Safety of machinery — Permanent means of access to machinery —

Part 3: Stairs, stepladders and guard-rails

1 Scope

This part of ISO 14122 gives requirements for non-powered stairs, stepladders and guard-rails which are a part of a stationary machine, and to the non-powered adjustable parts (e.g. foldable, slidable) and movable parts of those fixed means of access.

NOTE 1 “Fixed” means of access are those mounted in such a manner (for example, by screws, nuts, welding) that they can only be removed by the use of tools.

This part of ISO 14122 specifies minimum requirements that also apply when the same means of access is required as the part of the building or civil construction (e.g. stairs, stepladders, guard-rails) where the machine is installed, on condition that the main function of that part of the construction is to provide a means of access to the machine.

NOTE 2 Where no local regulation or standards exists, this part of ISO 14122 may be used also for means of access which are outside the scope of the standard.

It is intended that this part of ISO 14122 be used with ISO 14122-1 to give the requirements for steps, stepladders and guard-rails.

The ISO 14122 series as a whole is applicable to both stationary and mobile machinery where fixed means of access are necessary. It is not applicable to powered means of access such as lifts, escalators, or other devices specially designed to lift persons between two levels.

This part of ISO 14122 is not applicable to machinery manufactured before the date of its publication.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12100, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

ISO 14122-1:2016, *Safety of machinery — Permanent means of access to machinery — Part 1: Choice of fixed means and general requirements of access*

3 Terms and definitions


For the purposes of this document, the terms and definitions given in ISO 12100, ISO 14122-1 and the following apply.

3.1 stairs step ladders

succession of horizontal levels — *steps* (3.1.11) and *landings* (3.1.5) — allowing passage on foot from one level to another

Note 1 to entry: Stairs/step ladders are composed of the elements shown in Figure 1 and defined in 3.1.1 to 3.1.16.

Note 2 to entry: For details on the *angle of pitch* (3.1.9) for stairs/step ladders, see ISO 14122-1:2016, 3.2 and 3.3.

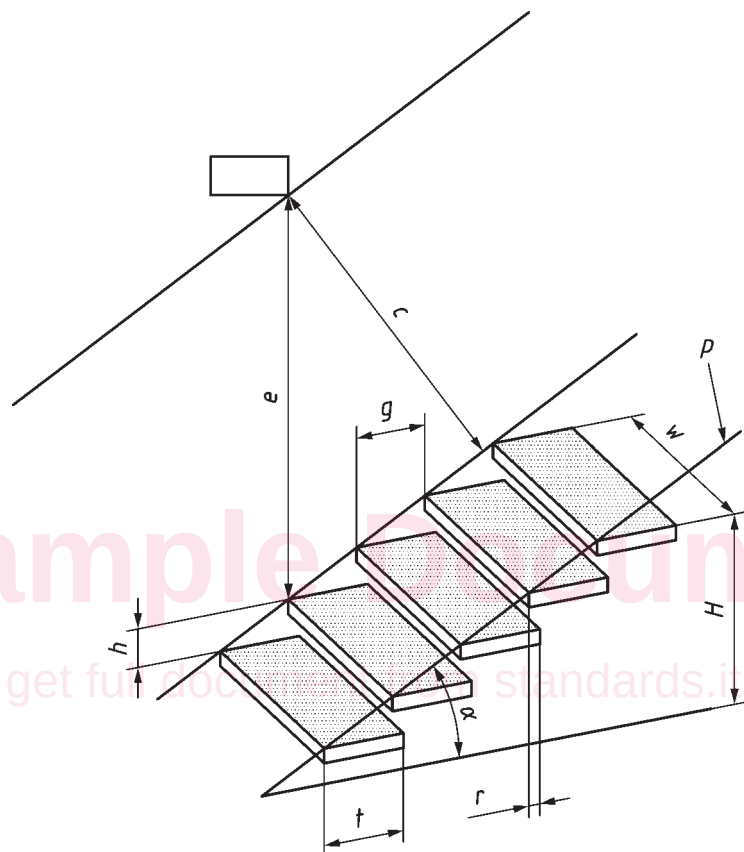

Key

H	climbing height	α	angle of pitch
g	going	w	width
e	head-height	p	pitch line
h	rise	t	depth of step
r	overlap	c	clearance

Figure 1 — Parts of stairs

3.1.1 climbing height

vertical distance between the reference level and the *landing* (3.1.5)

Note 1 to entry: See H in Figure 1.

3.1.2 flight

uninterrupted sequence of *steps* (3.1.11) between two *landings* (3.1.5)

3.1.3**going**

horizontal distance between the step *nosing* (3.1.12) of two consecutive steps

Note 1 to entry: See g in [Figure 1](#).

3.1.4**head-height**

minimum vertical distance, clear of all obstacles (such as beams, ducts, etc.) above the *pitch line* (3.1.8)

Note 1 to entry: See e in [Figure 1](#).

3.1.5**landing**

horizontal resting area situated at the end of a *flight* (3.1.2)

3.1.6**walking line**

theoretical line indicating the average path of the users

3.1.7**overlap**

difference between the depth of the step and the *going* (3.1.3)

Note 1 to entry: See r in [Figure 1](#).

3.1.8**pitch line**

notional line connecting the leading edge of the *nosing* (3.1.12) of successive *steps* (3.1.11) taken on the *walking line* (3.1.6) and which extends down to the landing at the bottom of the *flight* (3.1.2) from the nosing on the landing at the top of the flight

Note 1 to entry: See p in [Figure 1](#).

3.1.9**angle of pitch**

<stair or step ladder> angle between the *pitch line* (3.1.8) and its projection on the horizontal level

Note 1 to entry: See α in [Figure 1](#).

3.1.10**rise**

height between two consecutive *steps* (3.1.11) measured from the tread surface of one to the tread surface of the next

Note 1 to entry: See h in [Figure 1](#).

3.1.11**step**

horizontal surface on which one places the foot to go up or down the *stair/step ladder* (3.1)

3.1.12**nosing**

top edge at the front of the *step* (3.1.11) or *landing* (3.1.5)

3.1.13**string**

flanking framework element supporting the *steps* (3.1.11)