
**Acoustics — Noise from shooting
ranges —**

**Part 5:
Noise management**

Acoustique — Bruit des stands de tir —

Partie 5: Gestion du bruit

Sample Document

get full document from standards.iteh.ai



Reference number
ISO 17201-5:2010(E)

© ISO 2010

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Management process	7
5 Management documentation	11
6 Uncertainties	12
Annex A (informative) Examples	13
Annex B (informative) Classification of muzzle blast (emission)	22
Bibliography	25

Sample Document

get full document from standards.iteh.ai

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17201-5 was prepared by Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

ISO 17201 consists of the following parts, under the general title *Acoustics — Noise from shooting ranges*:

- *Part 1: Determination of muzzle blast by measurement*
- *Part 2: Estimation of muzzle blast and projectile sound by calculation*
- *Part 3: Guidelines for sound propagation calculations*
- *Part 4: Prediction of projectile sound*
- *Part 5: Noise management*

Introduction

The initiative to prepare a standard on impulse noise from shooting ranges was taken by the Association of European Manufacturers of Sporting Ammunition (AFEMS), in April 1996 by the submission of a formal proposal to CEN (see doc. CEN N 1085). After consultation in CEN in 1998, CEN/TC 211, *Acoustics*, asked ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise* to prepare ISO 17201 (all parts).

This part of ISO 17201 provides guidance for noise management of shooting activity at shooting ranges. It deals with the control of the noise received outside shooting ranges at specified reception points based either on measured or calculated data.

In general, national or regional environmental authorities specify how sound from shooting ranges should comply with guidelines, rules or regulations made by the relevant authorities. In situations with no official regulations, the management of a shooting range may use the method specified in this part of ISO 17201.

NOTE Conflicting national guidelines, rules or regulations can prevent the application of methods described in this part of ISO 17201.

Looking through various regulations used worldwide, many different approaches for noise control are found. In some countries, the long-term equivalent continuous sound pressure level is used to limit sound levels from shooting. In other countries, noise control is managed by limiting the level of one shot or by the difference between the long-term rating level and background sound pressure level, etc. This part of ISO 17201 gives a method for noise management to control the equivalent continuous sound pressure level by managing the number of shots for each combination of weapon type, ammunition type, the locations of firing, and the firing direction that is used in a shooting range. The weighting of the number of shots is related to the sound exposure levels produced by each combination at the reception points. By directly relating the number of shots to the limiting values, management objectives such as minimizing the noise load in the neighbourhood can be met.

Sample Document

get full document from standards.iteh.ai

Acoustics — Noise from shooting ranges —

Part 5: Noise management

1 Scope

This part of ISO 17201 gives guidelines for noise management of shooting activity at shooting ranges. The control of the noise received outside shooting ranges at specified reception points based either on measured or calculated sound exposure levels is specified. This part of ISO 17201 can also be used in the planning of new or reconstruction of existing ranges. It is intended to comply with all relevant local rules and regulations which imply a conversion of sound exposure level to other indicators as given in ISO 17201-3.

This part of ISO 17201 applies to weapons with calibres of less than 20 mm or explosive charges of less than 50 g TNT equivalent and pressures of less than 1 kPa at the reception point.

NOTE National or other regulations, which could be more stringent, can apply.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1996-2, *Acoustics — Description, measurement and assessment of environmental noise — Part 2: Determination of environmental noise levels*

ISO 17201-1:2005, *Acoustics — Noise from shooting ranges — Part 1: Determination of muzzle blast by measurement*

ISO 17201-2, *Acoustics — Noise from shooting ranges — Part 2: Estimation of muzzle blast and projectile sound by calculation*

ISO 17201-3, *Acoustics — Noise from shooting ranges — Part 3: Guidelines for sound propagation calculations*

ISO 17201-4, *Acoustics — Noise from shooting ranges — Part 4: Prediction of projectile sound*

ISO/IEC Guide 98-3:2008, *Uncertainty of measurement — Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 17201-1 and the following apply.

3.1 event duration

T
stated time interval, long enough to encompass all significant sound of a stated event at a **reception point** (3.22)

NOTE 1 The event duration is expressed in seconds.

NOTE 2 Adapted from ISO 17201-1:2005, 3.5.

3.2 sound exposure

E_T
integral of the square of the sound pressure, p , over a stated time interval or event of duration T (starting at t_1 and ending at t_2)

$$E_T = \int_{t_1}^{t_2} p^2(t) dt \quad (1)$$

NOTE 1 Sound exposure is expressed in square pascal seconds.

NOTE 2 Adapted from ISO 17201-1:2005, 3.6.

NOTE 3 Because of practical limitations of the measuring instruments, p^2 is always understood to denote the square of a frequency-weighted and frequency-band-limited sound pressure. If a specific frequency weighting as specified in IEC 61672-1 [6] is applied, this should be indicated by appropriate subscripts: e.g. $E_{A,1h}$ denotes the A-weighted sound exposure over 1 h.

NOTE 4 When applied to a single event, the quantity is called “single event sound exposure” and the symbol E is used without subscript.

NOTE 5 This definition is technically in accordance with ISO 80000-8:2007 [5], 8-18.

3.3 sound exposure level

L_E
ten times the logarithm to the base 10 of the ratio of the **sound exposure** (3.2), E_T , to a reference value, E_0 , expressed in decibels

$$L_E = 10 \lg \frac{E_T}{E_0} \text{ dB} \quad (2)$$

where the reference value, E_0 , is $(20 \mu\text{Pa})^2\text{s} = 4 \times 10^{-10} \text{ Pa}^2\text{s}$

NOTE 1 Adapted from ISO 17201-1:2005, 3.7.

NOTE 2 Application of specific frequency weightings as specified in IEC 61672-1 [6] is indicated by appropriate subscripts.

NOTE 3 When applied to a single event, the quantity is called “single event sound exposure level” and the symbol L_E is used without further subscript.

NOTE 4 This definition is technically in accordance with ISO 80000-8:2007 [5], 8-24.

3.4 total sound

totally encompassing sound in a given situation at a given time, usually composed of sound from many sources near and far

[ISO 1996-1:2003 ^[1].3.4.1]

See Figure 1.

3.5 specific sound

component of the **total sound** (3.4) that can be specifically identified and which is associated with a specific source

[ISO 1996-1:2003 ^[1].3.4.2]


See Figure 1.

3.6 residual sound

total sound (3.4) remaining at a given position and situation when the **specific sounds** (3.5) under consideration are suppressed

[ISO 1996-1:2003 ^[1], 3.4.3]

See Figure 1.

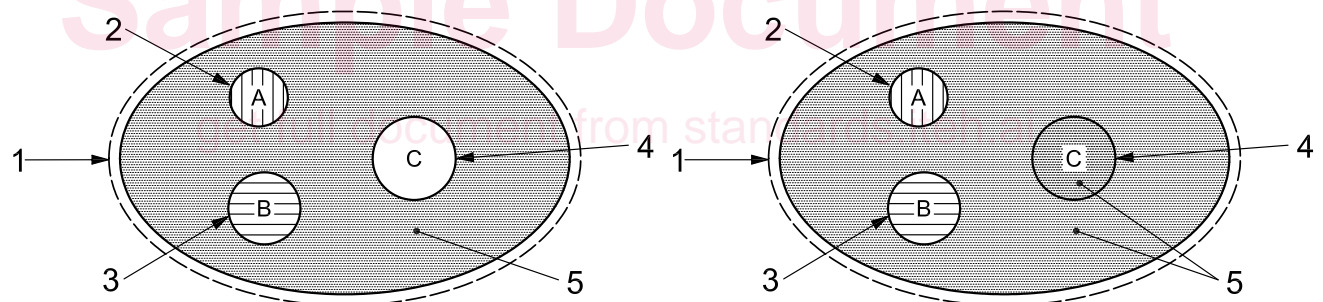

a) Three specific sounds (3.5) A, B and C under consideration — the residual sound (3.6) and the total sound (3.4) are also shown

b) Two specific sounds (3.5) A and B under consideration — the residual sound (3.6) and the total sound (3.4) are also shown

Key

1	total sound	4	specific sound C
2	specific sound A	5	residual sound
3	specific sound B		

NOTE 1 The lowest residual sound level is obtained when all specific sounds are suppressed.

NOTE 2 In Figure 1 a), the dotted area indicates the residual sound when sounds A, B, and C are suppressed.

NOTE 3 In Figure 1 b), the residual sound includes the specific sound C since it is not under consideration.

Figure 1 — Total, specific and residual sound designation