
**Road vehicles — Media Oriented
Systems Transport (MOST) —**

**Part 8:
150-Mbit/s optical physical layer**

Véhicules routiers — Système de transport axé sur les médias —

Partie 8: Couche optique physique à 150-Mbit/s

<https://standards.iteh.ai>
Document Preview

[ISO 21806-8:2020](https://standards.iteh.ai/catalog/standards/iso/26d45efa-1689-48e7-96a5-25baef7e8408/iso-21806-8-2020)

<https://standards.iteh.ai/catalog/standards/iso/26d45efa-1689-48e7-96a5-25baef7e8408/iso-21806-8-2020>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 21806-8:2020](https://standards.iteh.ai/catalog/standards/iso/26d45efa-1689-48e7-96a5-25baef7e8408/iso-21806-8-2020)

<https://standards.iteh.ai/catalog/standards/iso/26d45efa-1689-48e7-96a5-25baef7e8408/iso-21806-8-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	2
4.1 Symbols.....	2
4.2 Abbreviated terms.....	3
5 Conventions	4
6 Physical layer service interface to OSI data link layer	4
6.1 Overview.....	4
6.2 Data type definitions.....	4
6.3 Event indications and action requests.....	4
6.3.1 P_EVENT.INDICATE.....	4
6.3.2 P_ACTION.REQUEST.....	4
6.4 Parameters.....	4
6.4.1 PHY_Event.....	4
6.4.2 PHY_Request.....	5
7 Basic physical layer requirements	5
7.1 Logic terminology.....	5
7.1.1 Single-ended low-voltage digital signals.....	5
7.1.2 Differential LVDS signals.....	6
7.2 Specification points (SPs).....	6
7.3 Phase variation.....	7
7.3.1 General.....	7
7.3.2 Wander.....	7
7.3.3 Jitter.....	7
7.3.4 Clock recovery and reference clock.....	8
7.3.5 Link quality.....	9
7.3.6 MOST network quality.....	10
8 MOST150 oPHY requirements	14
8.1 General MOST network parameters.....	14
8.1.1 MOST network coding.....	14
8.1.2 Specification Point details.....	15
8.2 Models and measurement methods.....	16
8.2.1 Golden PLL.....	16
8.2.2 Jitter filter.....	17
8.2.3 Retimed bypass mode and stress pattern.....	18
8.2.4 Optical signal level detection.....	18
8.2.5 Region of optical signal level detection.....	18
9 Link specifications	19
9.1 General.....	19
9.2 Specification Point 1 (SP1).....	19
9.3 Specification Point 2 (SP2).....	21
9.3.1 Link quality parameters.....	21
9.3.2 Optical overshoot and undershoot.....	23
9.4 Specification Point 3 (SP3).....	26
9.5 Specification Point 4 (SP4).....	27
10 Power-on and power-off	28
10.1 Frequency reference and power supply.....	28

10.2	Power supply monitoring circuitry	29
10.3	Optical and electrical signal power state	29
10.3.1	General	29
10.3.2	EOC requirements	29
10.3.3	EOC power-on and power-off sequence	31
10.3.4	OEC requirements	32
10.3.5	OEC power-on and power-off sequence	34
11	MOST network requirements	35
11.1	SP4 receiver tolerance	35
11.2	TimingMaster delay tolerance	36
11.3	Optical fibre link length requirement	36
11.4	Environmental requirements and considerations	36
12	Electrical interfaces	36
12.1	LVDS	36
12.2	Bit rate and frequency tolerance	37
13	FOT packaging	37
13.1	SMD package	37
13.1.1	SMD FOT package reference drawings	37
13.1.2	SMD FOT pinout	37
13.1.3	SMD OEC signal definitions	38
13.1.4	SMD EOC signal definitions	39
13.2	Through-hole mount (THM) package	39
13.2.1	THM FOT package reference drawings	39
13.2.2	THM FOT pinout	40
13.2.3	THM OEC signal definitions	40
13.2.4	THM EOC signal definitions	40
13.3	Small form connector 2+0 SMD 7-Pin-package	41
13.3.1	2+0 Small form connector SMD 7-Pin-package reference drawings	41
13.3.2	Small form connector 2+0 SMD 7-Pin-package FOT pinout	41
13.3.3	7-Pin OEC signal definitions	42
13.3.4	7-Pin EOC signal definitions	42
13.4	MOST150 FO-Transceiver THM 180°	43
13.4.1	MOST150 FO-Transceiver THM 180° reference drawings	43
13.4.2	MOST150 FO-Transceiver THM 180° FOT pinout	43
13.4.3	MOST150 FO-Transceiver THM 180° OEC signal definitions	43
13.4.4	MOST150 FO-Transceiver THM 180° EOC signal definitions	43
13.5	MOST150 FO-Transceiver SMD 90°	43
13.5.1	MOST150 FO-Transceiver SMD 90° reference drawings	43
13.5.2	MOST150 FO-Transceiver SMD 90° FOT pinout	43
13.5.3	MOST150 FO-Transceiver SMD 90° OEC signal definitions	44
13.5.4	MOST150 FO-Transceiver SMD 90° EOC signal definitions	44
14	Device connectors	45
14.1	Connector interfaces	45
14.2	Connector interface loss	45
	Bibliography	47

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21806 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The Media Oriented Systems Transport (MOST) communication technology was initially developed at the end of the 1990s in order to support complex audio applications in cars. The MOST Cooperation was founded in 1998 with the goal to develop and enable the technology for the automotive industry. Today, MOST¹⁾ enables the transport of high quality of service (QoS) audio and video together with packet data and real-time control to support modern automotive multimedia and similar applications. MOST is a function-oriented communication technology to network a variety of multimedia devices comprising one or more MOST nodes.

Figure 1 shows a MOST network example.

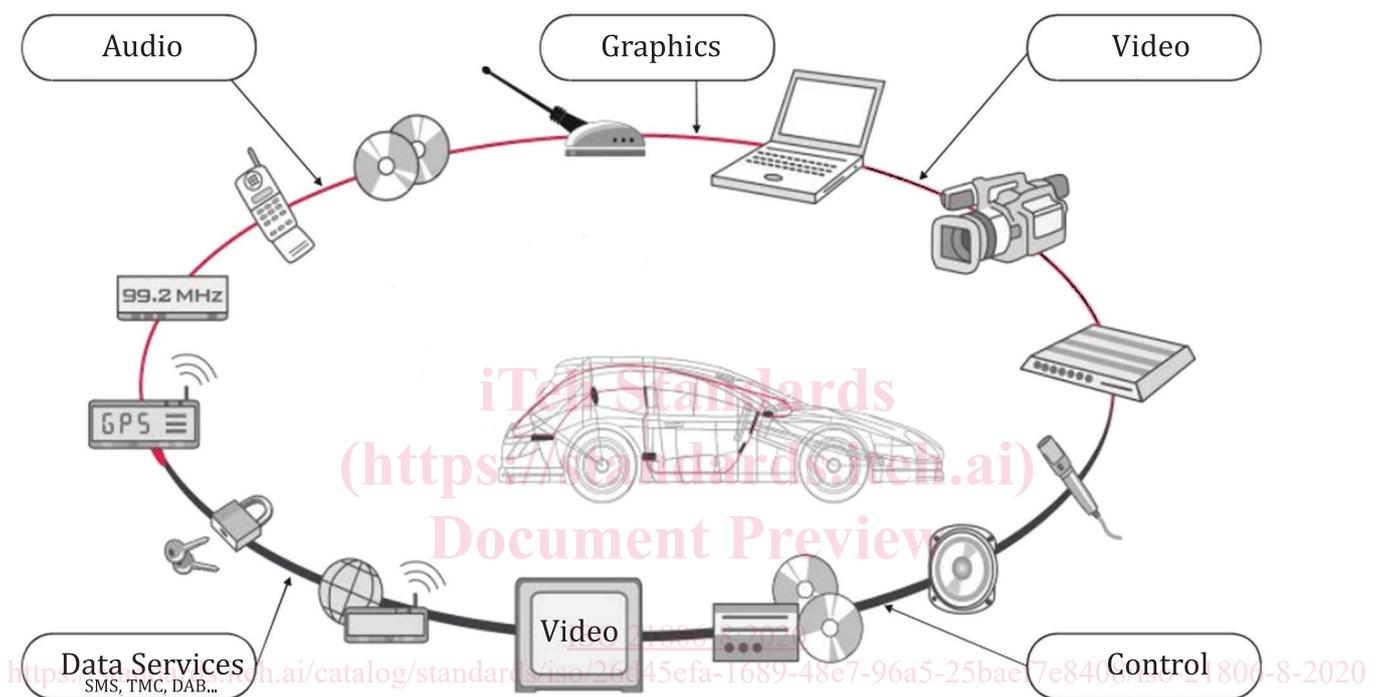


Figure 1 — MOST network example

The MOST communication technology provides:

- synchronous and isochronous streaming,
- small overhead for administrative communication control,
- a functional and hierarchical system model,
- API standardization through a function block (FBlock) framework,
- free partitioning of functionality to real devices,
- service discovery and notification, and
- flexibly scalable automotive-ready Ethernet communication according to ISO/IEC/IEEE 8802-3^[4].

MOST is a synchronous time-division-multiplexing (TDM) network that transports different data types on separate channels at low latency. MOST supports different bit rates and physical layers. The network clock is provided with a continuous data signal.

1) MOST® is the registered trademark of Microchip Technology Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO.

Within the synchronous base data signal, the content of multiple streaming connections and control data is transported. For streaming data connections, bandwidth is reserved to avoid interruptions, collisions, or delays in the transport of the data stream.

MOST specifies mechanisms for sending anisochronous, packet-based data in addition to control data and streaming data. The transmission of packet-based data is separated from the transmission of control data and streaming data. None of them interfere with each other.

A MOST network consists of devices that are connected to one common control channel and packet channel.

In summary, MOST is a network that has mechanisms to transport the various signals and data streams that occur in multimedia and infotainment systems.

The ISO standards maintenance portal (<https://standards.iso.org/iso/>) provides references to MOST specifications implemented in today's road vehicles because easy access via hyperlinks to these specifications is necessary. It references documents that are normative or informative for the MOST versions 4V0, 3V1, 3V0, and 2V5.

The ISO 21806 series has been established in order to specify requirements and recommendations for implementing the MOST communication technology into multimedia devices and to provide conformance test plans for implementing related test tools and test procedures.

To achieve this, the ISO 21806 series is based on the open systems interconnection (OSI) basic reference model in accordance with ISO/IEC 7498-1^[2] and ISO/IEC 10731^[3], which structures communication systems into seven layers as shown in [Figure 2](#). Stream transmission applications use a direct stream data interface (transparent) to the data link layer.

(<https://standards.iteh.ai>)
Document Preview

[ISO 21806-8:2020](#)

<https://standards.iteh.ai/catalog/standards/iso/26d45efa-1689-48e7-96a5-25baef7e8408/iso-21806-8-2020>