

---

---

**Road vehicles — Media Oriented  
Systems Transport (MOST) —**

**Part 9:  
150-Mbit/s optical physical layer  
conformance test plan**

*Véhicules routiers — Système de transport axé sur les médias —*

*Partie 9: Plan d'essais de conformité de la couche optique physique à  
150-Mbit/s*

*iTech Standards*  
*(<https://standards.iteh.ai>)*  
**Document Preview**

ISO 21806-9:2020

<https://standards.iteh.ai/catalog/standards/iso/19624c0e-4e61-4888-90b2-ac8145965041/iso-21806-9-2020>



**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[ISO 21806-9:2020](https://standards.iteh.ai/catalog/standards/iso/19624c0e-4e61-4888-90b2-ac8145965041/iso-21806-9-2020)

<https://standards.iteh.ai/catalog/standards/iso/19624c0e-4e61-4888-90b2-ac8145965041/iso-21806-9-2020>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword .....	v
Introduction .....	vi
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Symbols and abbreviated terms</b> .....	<b>2</b>
4.1 Symbols .....	2
4.2 Abbreviated terms .....	2
<b>5 Conventions</b> .....	<b>3</b>
<b>6 Operating conditions and measurement tools, requested accuracy</b> .....	<b>3</b>
6.1 Operating conditions .....	3
6.2 Apparatus — Measurement tools, requested accuracy .....	3
<b>7 Electrical characteristics</b> .....	<b>5</b>
7.1 Test according to LVDS .....	5
7.2 Test according to LVTTTL .....	5
<b>8 Optical characteristics</b> .....	<b>5</b>
8.1 Measurement of optical output power at SP2 .....	5
8.2 Measurement of optical input power at SP3 .....	6
8.3 Measurement of pigtail fibre attenuation .....	7
8.3.1 General .....	7
8.3.2 Practical considerations .....	9
8.4 Spectral parameters at SP2 .....	11
8.5 $b_0/b_1$ detection at SP2 .....	11
8.6 Extinction ratio at SP2 .....	13
8.7 Optical overshoot and undershoot at SP2 .....	13
8.7.1 General .....	13
8.7.2 Overshoot measurement example .....	14
8.7.3 Undershoot (2 UI) measurement example .....	16
8.7.4 Undershoot (4UI) measurement example .....	16
8.8 Transition times at SP2 .....	17
8.9 Stimulus creation for SP3 .....	18
<b>9 Measurement of phase variation</b> .....	<b>19</b>
9.1 General .....	19
9.2 Measuring alignment jitter .....	21
9.3 Measuring transferred jitter .....	23
9.4 Test set-ups .....	25
9.4.1 Relevant eye mask for MOST components .....	25
9.4.2 SP4 jitter measurement (AJ and TJ) .....	26
9.4.3 SP2 jitter measurement (AJ and TJ) .....	27
9.5 Crosstalk .....	28
9.5.1 General .....	28
9.5.2 Measurement set-up .....	28
9.5.3 Procedure .....	29
<b>10 Power-on and power-off</b> .....	<b>29</b>
10.1 General .....	29
10.2 Measuring EOC parameters .....	30
10.2.1 Measuring EOC parameters — Test set-up .....	30
10.2.2 Measuring EOC parameters — Signal charts .....	31
10.2.3 Measuring EOC parameters — Test sequences .....	33
10.3 Measuring OEC parameters .....	37

10.3.1	Measuring OEC parameters — Test set-up .....	37
10.3.2	Measuring OEC parameters — Signal charts.....	38
10.3.3	Measuring OEC parameters — Test sequences.....	39
<b>11</b>	<b>Detecting bit rate (frequency reference).....</b>	<b>43</b>
<b>12</b>	<b>System performance.....</b>	<b>43</b>
12.1	General.....	43
12.2	SP4 receiver tolerance.....	43
12.3	TimingMaster delay tolerance.....	44
<b>13</b>	<b>Conformance tests of 150-Mbit/s optical physical layer.....</b>	<b>47</b>
13.1	Location of interfaces.....	47
13.2	Control signals.....	48
13.3	Limited access to specification points.....	49
13.4	Parameter overview.....	49
<b>14</b>	<b>Physical layer verification for MOST components, MOST modules, and MOST devices.....</b>	<b>51</b>
14.1	FOT.....	51
14.2	Pigtail.....	52
14.3	MOST device.....	52
14.4	Development tool.....	52
<b>15</b>	<b>Full physical layer conformance.....</b>	<b>52</b>
15.1	Overview.....	52
15.2	Consideration of FOT.....	52
15.3	Consideration of pigtail.....	52
15.4	Consideration of connector interfaces.....	52
15.5	Generating test signals for the IUT.....	53
15.5.1	General information.....	53
15.5.2	Test set-up for jitter measurement.....	53
<b>16</b>	<b>Limited physical layer conformance.....</b>	<b>53</b>
16.1	Overview.....	53
16.2	Generating test signals for the IUT input section SP3.....	55
16.3	Analysis of test results.....	56
16.4	Test flow overview.....	56
16.5	Measurement of SP3 input signal of the IUT.....	57
16.6	Measurement of SP2 output signal of the IUT.....	58
16.7	Functional testing of wake-up and shutdown.....	58
<b>17</b>	<b>Direct physical measuring accuracy.....</b>	<b>59</b>
<b>18</b>	<b>General remarks.....</b>	<b>61</b>
18.1	Definition of family.....	61
18.2	Supplier guideline for product changes.....	61
18.3	Dependency of the network frame rate.....	62
	<b>Annex A (informative) Measuring optical signals at SP2 using averaging.....</b>	<b>63</b>
	<b>Annex B (normative) SNR requirements for test equipment.....</b>	<b>64</b>
	<b>Annex C (informative) Limited physical layer conformance for development tools.....</b>	<b>67</b>
	<b>Bibliography.....</b>	<b>68</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21806 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The Media Oriented Systems Transport (MOST) communication technology was initially developed at the end of the 1990s in order to support complex audio applications in cars. The MOST Cooperation was founded in 1998 with the goal to develop and enable the technology for the automotive industry. Today, MOST<sup>1)</sup> enables the transport of high quality of service (QoS) audio and video together with packet data and real-time control to support modern automotive multimedia and similar applications. MOST is a function-oriented communication technology to network a variety of multimedia devices comprising one or more MOST nodes.

Figure 1 shows a MOST network example.

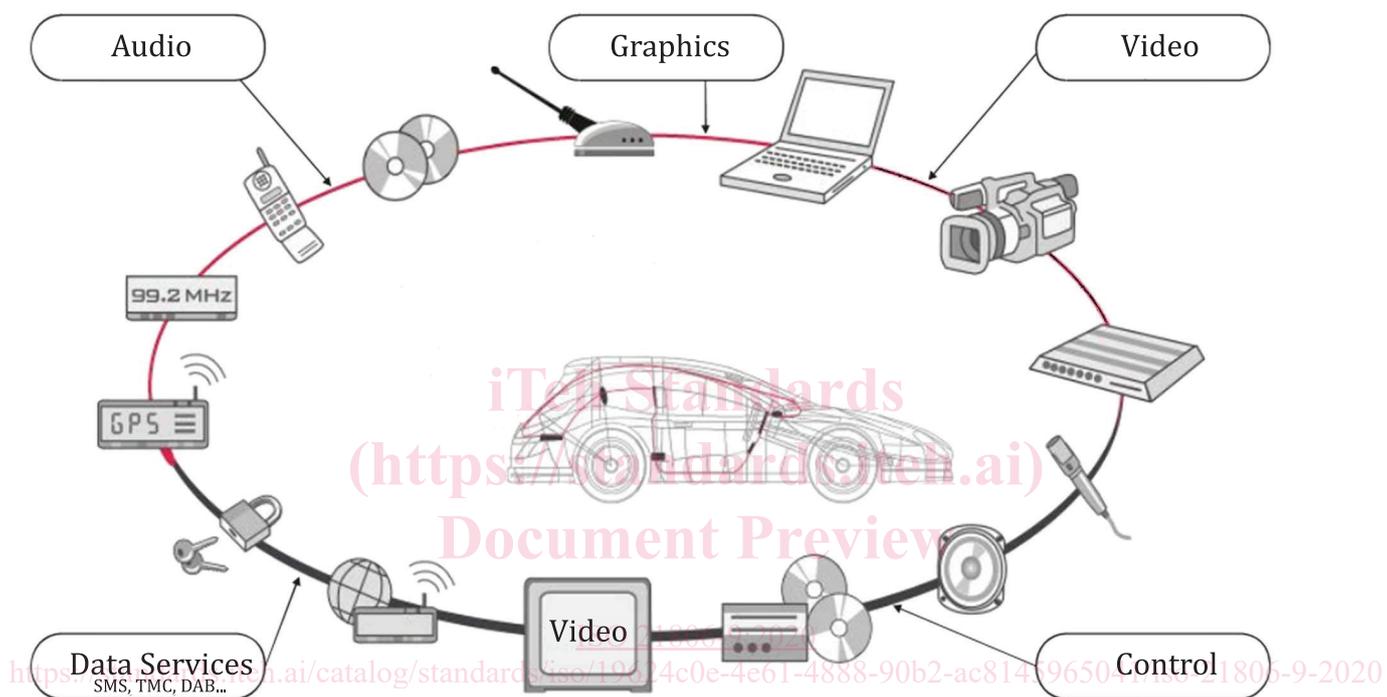


Figure 1 — MOST network example

The MOST communication technology provides

- synchronous and isochronous streaming,
- small overhead for administrative communication control,
- a functional and hierarchical system model,
- API standardization through a function block (FBlock) framework,
- free partitioning of functionality to real devices,
- service discovery and notification, and
- flexibly scalable automotive-ready Ethernet communication according to ISO/IEC/IEEE 8802-3<sup>[3]</sup>.

MOST is a synchronous time-division-multiplexing (TDM) network that transports different data types on separate channels at low latency. MOST supports different bit rates and physical layers. The network clock is provided with a continuous data signal.

1) MOST® is the registered trademark of Microchip Technology Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO.

Within the synchronous base data signal, the content of multiple streaming connections and control data is transported. For streaming data connections, bandwidth is reserved to avoid interruptions, collisions, or delays in the transport of the data stream.

MOST specifies mechanisms for sending anisochronous, packet-based data in addition to control data and streaming data. The transmission of packet-based data is separated from the transmission of control data and streaming data. None of them interfere with each other.

A MOST network consists of devices that are connected to one common control channel and packet channel.

In summary, MOST is a network that has mechanisms to transport the various signals and data streams that occur in multimedia and infotainment systems.

The ISO standards maintenance portal (<https://standards.iso.org/iso/>) provides references to MOST specifications implemented in today's road vehicles because easy access via hyperlinks to these specifications is necessary. It references documents that are normative or informative for the MOST versions 4V0, 3V1, 3V0, and 2V5.

The ISO 21806 series has been established in order to specify requirements and recommendations for implementing the MOST communication technology into multimedia devices and to provide conformance test plans for implementing related test tools and test procedures.

To achieve this, the ISO 21806 series is based on the open systems interconnection (OSI) basic reference model in accordance with ISO/IEC 7498-1<sup>[1]</sup> and ISO/IEC 10731<sup>[2]</sup>, which structures communication systems into seven layers as shown in [Figure 2](#). Stream transmission applications use a direct stream data interface (transparent) to the data link layer.

(<https://standards.iteh.ai>)  
Document Preview

[ISO 21806-9:2020](#)

<https://standards.iteh.ai/catalog/standards/iso/19624c0e-4e61-4888-90b2-ac8145965041/iso-21806-9-2020>