
**Open data communication in building
automation, controls and building
management — Home and building
electronic systems — KNXnet/IP
communication**

*Réseau ouvert de communication de données pour l'automatisation,
la régulation et la gestion technique du bâtiment — Systèmes
électroniques pour les foyers domestiques et les bâtiments —
Communication KNX/IP*

(<https://standards.iteh.ai>)
Document Preview

ISO 22510:2019

<https://standards.iteh.ai/catalog/standards/iso/4824ea26-603b-47a0-9ca5-95b60ea9127c/iso-22510-2019>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 22510:2019

<https://standards.iteh.ai/catalog/standards/iso/4824ea26-603b-47a0-9ca5-95b60ea9127c/iso-22510-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	4
5 Requirements	5
5.1 Overview	5
5.1.1 KNXnet/IP document parts	5
5.1.2 Mandatory and optional implementation of IP protocols	7
5.2 Core	8
5.2.1 Use	8
5.2.2 KNXnet/IP frames	9
5.2.3 Host protocol independence	10
5.2.4 Discovery and self description	11
5.2.5 Communication channels	13
5.2.6 General implementation guidelines	15
5.2.7 Data Packet structures	19
5.2.8 IP Networks	38
5.2.9 Minimum supported services	47
5.3 Device management specification	48
5.3.1 Use	48
5.3.2 KNXnet/IP device management	48
5.3.3 Implementation rules and guidelines	59
5.3.4 Data packet structures	60
5.3.5 Minimum profiles	63
5.4 Tunnelling	64
5.4.1 Use	64
5.4.2 Tunnelling of KNX telegrams	64
5.4.3 Configuration and management	68
5.4.4 Frame structures	70
5.4.5 Minimum profiles	77
5.5 Routing	78
5.5.1 Use	78
5.5.2 KNXnet/IP routing of KNX telegrams	78
5.5.3 Implementation rules and guidelines	88
5.5.4 Configuration and management	91
5.5.5 Data packet structures	91
5.5.6 Minimum profiles	93
5.6 Remote diagnosis and configuration	94
5.6.1 Use	94
5.6.2 Remote diagnosis of KNXnet/IP devices	95
5.6.3 Configuration and management	95
5.6.4 Data packet structures	96
5.6.5 Certification	101
5.7 Secured communication	101
5.7.1 Use	101
5.7.2 Stack and communication	102
5.7.3 Management procedures	143
5.7.4 Synchronizing timers	146
Annex A (normative) List of codes	148
Annex B (informative) Binary examples of KNXnet/IP frames	155

Annex C (normative) KNXnet/IP parameter object	175
Annex D (normative) Common external messaging interface (cEMI)	178
Annex E (normative) Coupler resources	210
Bibliography	221

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 22510:2019](https://standards.itih.ai/catalog/standards/iso/4824ea26-603b-47a0-9ca5-95b60ea9127c/iso-22510-2019)

<https://standards.itih.ai/catalog/standards/iso/4824ea26-603b-47a0-9ca5-95b60ea9127c/iso-22510-2019>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 247, *Building Automation, Controls and Building Management*, in collaboration with ISO Technical Committee TC 205, *Building environment design*, in accordance with the agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 16484 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is intended for the design of new buildings and the retrofit of existing buildings in terms of acceptable indoor environment, practical energy conservation and efficiency.

KNXnet/IP is a protocol designed to transport KNX home and building electronic system (HBES) control frames over an IP network. It is used as an infrastructure backbone for connecting KNX sub-networks, as a communication medium for KNX-IP devices and to provide IP based services for clients (e.g. connecting a tool software to a KNX installation). The main advantages of using IP for these purposes are that IP network infrastructure is inexpensive, available almost everywhere and that the distance of two communication parties on an IP network is virtually unlimited.

Widespread deployment of data networks using the Internet protocol (IP) presents an opportunity to expand building control communication beyond the local KNX control bus, providing:

- remote configuration;
- remote operation (including control and annunciation);
- fast interface from LAN to KNX and vice versa;
- WAN connection between KNX systems (where an installed KNX system is at least one line);
- an interface to super ordinate building management and energy management systems.

A KNXnet/IP system contains at least these elements:

- one EIB line with up to 64 (255) EIB devices; or one KNX segment (KNX-TP1, KNX-RF, KNX-PL110);
- a KNX-to-IP network connection device (called KNXnet/IP server); and typically
- additional software for remote functions residing on e.g. a workstation (may be data base application, BACnet Building Management System, browser, etc.).

KNXnet/IP differentiates between unicast and multicast services. KNXnet/IP unicast services are used to connect a single client to a single KNXnet/IP server (e.g. KNXnet/IP Tunnelling). KNXnet/IP multicast services are mainly used to connect different KNX sub-networks using IP communication on the KNX backbone. The KNXnet/IP routing services are defined for this purpose. KNXnet/IP multicast services build on top of IP multicast.

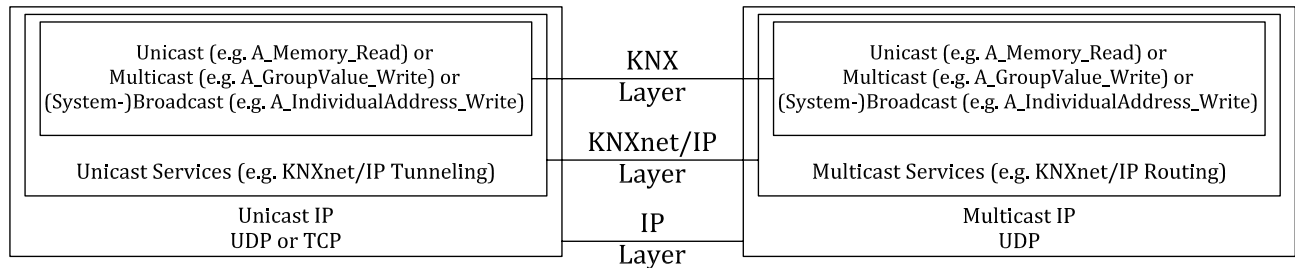


Figure 1 — Unicast and multicast in the sense of KNX, KNXnet/IP and IP

Figure 1 shows a typical scenario where a KNXnet/IP client (e.g. running ETS) accesses multiple KNX installed systems or KNX subnetworks via an IP network. The KNXnet/IP client may access one or more KNXnet/IP servers at a time. For subnetwork, routing server-to-server communication is possible.

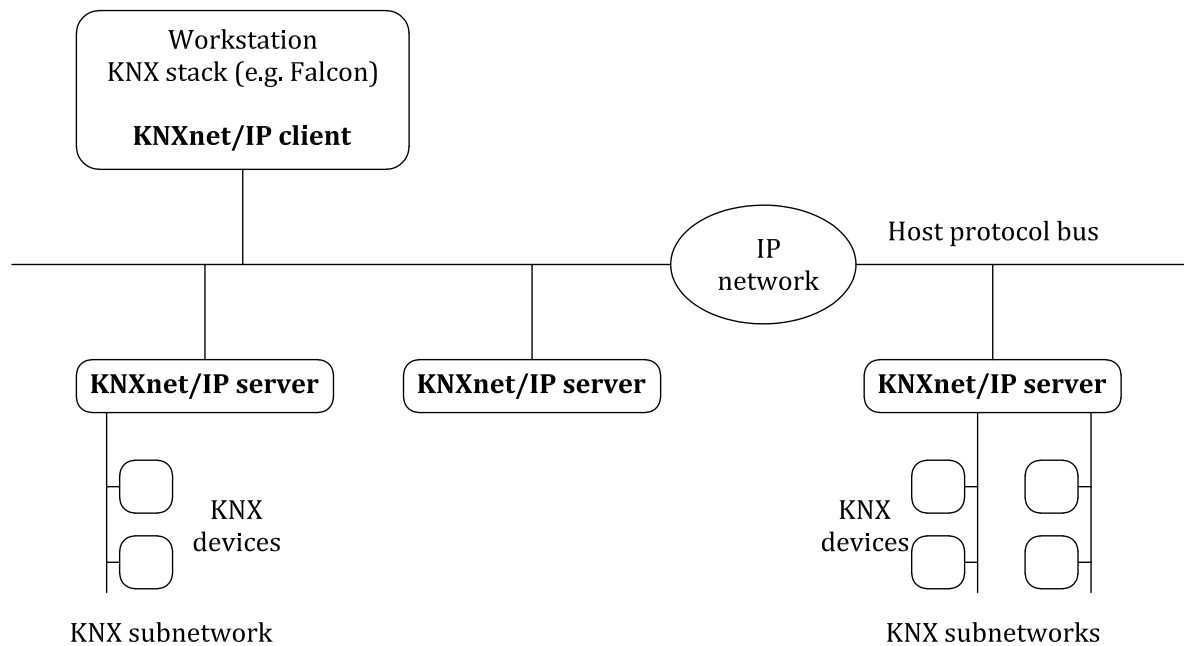


Figure 2 — Device types and configuration examples

[Figure 2](#) shows device types and configuration examples. This document defines the integration of KNX protocol implementations within the Internet protocol (IP) named KNXnet/IP. It defines a standard protocol, which is implemented within KNX devices, Engineering Tool Software (ETS) and other implementations to support KNX data exchange over IP networks. In fact, KNXnet/IP provides a general framework, which accommodates several specialised “Service Protocols” in a modular and extendible fashion.

ISO 22510:2019

<https://standards.iteh.ai/catalog/standards/iso/4824ea26-603b-47a0-9ca5-95b60ea9127c/iso-22510-2019>