



**International
Standard**

ISO 23375

**Intelligent transport systems —
Collision evasive lateral manoeuvre
systems (CELM) — Requirements
and test procedures**

*Systèmes de transport intelligents — Systèmes de manœuvre
latérale d'évitement de collision (CELM) — Exigences et
procédures d'essai*

**Second edition
2026-10**

Sample Document

get full document from standards.iteh.ai

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2026

All rights reserved.

This ISO publication is protected by copyright and is owned by ISO and/or its licensors.

The content of this ISO publication is provided under licence, not sold. Use is subject to the applicable licence terms issued by ISO, an ISO member body, or an authorized third-party distributor.

Except as required for implementation or expressly permitted by a separate licence, no part of this ISO publication may be reproduced, distributed, modified, used, or made available in any form or by any means – electronic or mechanical, including photocopying, scanning, recording, or posting on internal or external digital platforms.

Any use beyond the scope of the granted rights is prohibited and may result in legal action.

ISO copyright office
CP 401 • CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	2
4.1 Symbols	2
4.2 Abbreviated terms	3
5 System overview	3
5.1 General	3
5.2 Classification	4
6 General functional requirements	4
6.1 Functional elements	4
6.2 State transition	5
6.2.1 Definition of states	5
6.2.2 Transition conditions	6
6.3 Response to failure during CELM active state	6
6.4 Status indication	6
6.4.1 Active state	6
6.4.2 Optional warning	7
6.4.3 Failure	7
6.4.4 CELM switch on/off status	7
6.5 Status symbols	7
6.6 Minimization of vehicle lateral movement by CELM	7
6.7 Driver override	7
6.8 User-adjustable intervention thresholds	7
6.9 Information to the user in the manual	7
7 Operating conditions and requirements for Type 1 systems	7
7.1 General	7
7.2 Object condition	8
7.2.1 Object type	8
7.2.2 Amount of lateral offset	8
7.3 Activation speed of subject vehicle	9
7.4 Road condition	10
7.5 Operational limit	10
7.5.1 Operation on roads with lane markings	10
7.5.2 Operation on roads without lane markings	11
7.6 Additional operating conditions and requirements for CELM Type 1-B, when crossing lane markings	12
8 Operating conditions and requirements for Type 2 systems	13
8.1 General	13
8.2 Object condition	14
8.3 Activation speed of subject vehicle	14
8.4 Adjustment to the original heading angle after avoiding a collision	14
9 Performance evaluation test methods	14
9.1 General	14
9.2 Test conditions	14
9.2.1 Environmental conditions	14
9.2.2 Test course conditions	15
9.2.3 Test vehicle conditions	15
9.2.4 Test system installation and configuration	15

9.2.5	Data recording.....	15
9.2.6	Test target.....	15
9.3	Type 1 test procedures.....	16
9.3.1	Test case selection.....	16
9.3.2	Test parameters.....	16
9.3.3	Test target selection and positioning.....	18
9.3.4	Test procedures.....	21
9.3.5	Pass criteria.....	22
9.4	Additional Type 1-B Test procedures.....	22
9.4.1	Test case selection.....	22
9.4.2	Test parameters and target positioning.....	23
9.4.3	Test target selection.....	24
9.4.4	Test procedures.....	24
9.4.5	Pass criteria.....	25
9.5	Type 2 test procedures.....	25
9.5.1	Test equipment.....	25
9.5.2	Trajectory and torque data.....	26
9.5.3	Test procedure for collision avoidance performance.....	28
9.5.4	Pass criterion for collision avoidance performance.....	29
9.5.5	Test procedure for adjustment to the original heading angle performance (Type 2-A).....	29
9.5.6	Pass criterion for adjustment to the original heading angle performance (Type 2-A).....	30
9.5.7	Test procedure for adjustment to the original heading angle performance (Type 2-B).....	31
9.5.8	Pass criterion for adjustment to the original heading angle performance (Type 2-B).....	31
Annex A (informative) Examples of use cases for Type 1 systems.....		32
Annex B (informative) Additional information for Type 2 testing.....		35
Bibliography.....		36

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

This second edition cancels and replaces the first edition (ISO 23375:2023), which has been technically revised.

The main changes are as follows:

- extended with performance requirements and test procedures for a type of automatic collision evasive lateral manoeuvre system (CELM) that permits lane crossing under specified conditions;
- included performance requirements and a test procedure for the original heading angle adjustment function for a type of driver-initiated CELM.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Reducing traffic fatalities, injuries and property damage caused by driver carelessness or unexpected events is a global challenge. To address this situation, automatic emergency braking (AEB) systems were introduced to mitigate crash consequences through automatic deceleration by braking of the vehicle.

NOTE ISO 22839 and ISO 19237 are examples of related International Standards defining the minimum performance requirements of such systems. The ISO 22733 series defines test procedures to evaluate the performance level of such systems.

These AEB systems work effectively when there is a high probability of a collision, but their operation can be limited, or they can potentially not work at all, when there is a low probability of a collision (e.g. when the degree of overlap to the object is small). However, even in such scenarios, there are cases where a collision can be avoided by system support, i.e. by a small amount of lateral movement.

This document defines functional requirements, minimum performance requirements and test procedures to verify these requirements for collision avoidance systems using lateral movement of the vehicle, i.e. a collision evasive lateral manoeuvre system (CELM).

A CELM is a safety system aimed at supporting the driver's vehicle operation by avoiding collisions with objects in the forward path of the vehicle. When a collision is predicted, the CELM controls lateral movement of the vehicle by generating yaw moment.

The lateral control manoeuvres can be performed automatically by CELM or can be initiated by the driver and supported by CELM.

Sample Document

get full document from standards.iteh.ai

Intelligent transport systems — Collision evasive lateral manoeuvre systems (CELM) — Requirements and test procedures

1 Scope

This document specifies basic control strategies, minimum functional requirements, basic driver interface elements, and test procedures for verifying the system requirements for collision evasive lateral manoeuvre systems (CELM).

Specific methods for object detection and other environmental perception technologies are not described in this document.

This document applies to light vehicles^[1] and heavy trucks^[1]. Vehicles equipped with trailers are not within the scope of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

FMVSS 105:2026, *Hydraulic and Electric Brake Systems*

ISO 19206-2, *Road vehicles — Test devices for target vehicles, vulnerable road users and other objects, for assessment of active safety functions — Part 2: Requirements for pedestrian targets*

ISO 19206-3, *Road vehicles — Test devices for target vehicles, vulnerable road users and other objects, for assessment of active safety functions — Part 3: Requirements for passenger vehicle 3D targets*

ISO 17387, *Intelligent transport systems — Lane change decision aid systems (LCDAS) — Performance requirements and test procedures*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 subject vehicle

SV
vehicle equipped with a collision evasive lateral manoeuvre system (CELM)

3.2 object

obstacle that can represent a hazard if hit by the *subject vehicle* (3.1)

3.3

lane marking

delineator, marking or Botts' dot intentionally placed on the borderline of the lane

3.4

lane boundary

outer edge of the *lane marking* ([3.3](#))

3.5

system failure

inability of a system or system component to perform a required function within specified limits, which is caused by mechanical or electronic malfunction

3.6

subject vehicle direction

SV direction

direction of travel of the *subject vehicle* ([3.1](#)) used to predict a collision

3.7

time to collision

TTC

time that it will take a *subject vehicle* ([3.1](#)) to collide with an object assuming constant relative velocity

3.8

critical approach

driving situation which leads to an imminent collision if no driver or system prevention reaction occurs

3.9

highway

type of road where pedestrians and cyclists are prohibited and which, by design, is equipped with a physical separation that divides the traffic moving in opposite directions

3.10

ego lane

lane in which the *subject vehicle* ([3.1](#)) is currently travelling

4 Symbols and abbreviated terms

4.1 Symbols

Symbols used in this document and their meanings are described in [Table 1](#).

Table 1 — Symbols and meanings

Symbol	Meaning	Unit
V_{SV}	Speed of the SV.	m/s
V_{min}	Minimum SV speed for CELM operation.	m/s
V_{max}	Maximum SV speed for CELM operation.	m/s
V_{svL}	The mean of lateral speed of the SV orthogonal to the lane markings, i.e. the y-axis component of vehicle motion when travelling parallel to the lane markings (see 9.3.3.3 for details).	m/s
L_d	Lateral distance between the outermost edge of the object and the extension of the side of the SV closest to the object when measured parallel to the SV (i.e. point at which the distance becomes minimum). A positive value refers to a situation where an overlap exists between the SV and object. A negative value refers to a situation where an overlap does not exist between the SV and object. See 7.2.2 for details.	m
L_{d_inner}	Distance between the edge of an object and the inner edge of lane marking, when the object is located inside the ego lane of the SV.	m
L_{d_outer}	Distance between the edge of an object and the outer edge of lane marking, when the object is located outside the ego lane of the SV.	m
L_{ofst_min}	Minimum amount of lateral offset to which the system is designed to respond.	m
L_{ofst_max}	Maximum amount of lateral offset to which the system is designed to respond.	m
x_{c_min}	Minimum longitudinal distance for which the angle between the SV and an object shall be constant when the SV approaches a test target.	m
L_{dsv}	Permissible range of lateral movement.	m

4.2 Abbreviated terms

AEB	automatic emergency braking
CELM	collision evasive lateral manoeuvre system
LDP	lane departure prevention
TTC	time to collision
GNSS	Global Navigation Satellite System

5 System overview

5.1 General

The CELM detects objects in the front area in the current SV direction of travel.

The CELM determines objects as hazardous if they are predicted to be in the driving path of the SV and a collision with the object is imminent.

The CELM activates actuators (e.g. steering, brake) to generate yaw moment in an attempt to avoid a collision.

The CELM controls or supports the lateral movement of the SV in the direction which avoids the collision in the best manner or which has been chosen by the driver.

The CELM may operate under conditions where AEB systems are activated.

When the CELM is initiating, performing or terminating evasive manoeuvres, the vehicle remains controllable by the driver.

5.2 Classification

CELMs are classified into two types as shown in [Table 2](#).

Table 2 — Type classification

Types	Initiation	Description
Type 1	Automatic	<ul style="list-style-type: none"> — The evasive manoeuvre is performed automatically by the system (See Clause 7 for details). — Amount of lateral movement is restricted. <p>Type 1-A: The evasive manoeuvre shall be performed within the lane of the subject vehicle.</p> <p>Type 1-B (optional): Additionally, the evasive manoeuvre may continue to be in effect - crossing the lane marking only if the requirements in 7.6 can be met.</p>
Type 2	Driver trigger	<ul style="list-style-type: none"> — The driver performs the evasive manoeuvre. The system supports the driver (See Clause 8 for details). — No restriction on the amount of lateral movement.

6 General functional requirements

6.1 Functional elements

The CELM shall be designed taking into consideration the functional elements shown in [Figure 1](#).

Output to the brake actuator (e.g. activation of AEB systems) can potentially improve avoidance performance. However, the implementation methods for such a combination are not described in this document.


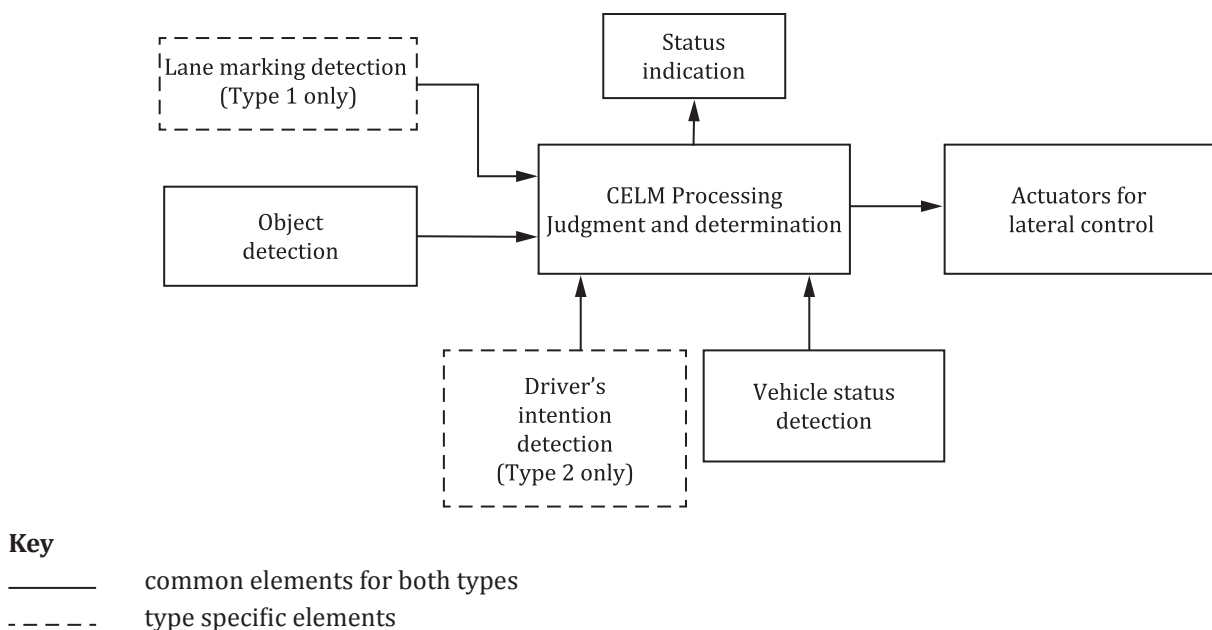


Figure 1 — Functional elements

6.2 State transition

A CELM shall operate according to the state transition diagram shown in [Figure 2](#). Specific implementation beyond that which is illustrated in [Figure 2](#) is left to the discretion of the manufacturer.

The transition diagram in [Figure 2](#) is applicable to both Type 1 and Type 2 systems. However, conditions for transition 3 and transition 4 are different.

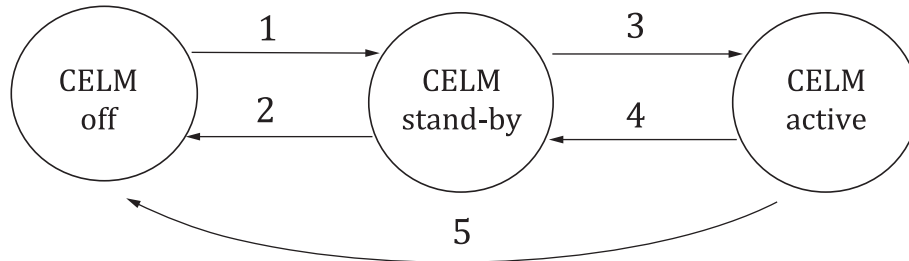

Key

- | | |
|---|--|
| <p>1 (Propulsion runcycle on and no system failure)
or
(CELM on/off switch is manually turned on, if applicable and no system failure)</p> <p>2 System failure
or propulsion run cycle off
or CELM on/off switch is manually turned off, if applicable</p> <p>3 Type 1
— critical approach is predicted
— and $V_{\min} \leq V_{sv} \leq V_{\max}$
— and other criteria specified by manufacturer (optionally)</p> | <p>4 Driver override condition satisfied or evasive manoeuvre is completed</p> <p>5 System failure
or propulsion run cycle off</p> |
|---|--|
- Type 2
— system predicts a critical approach to an object
— and the driver initiates an evasive manoeuvre
— and $V_{\min} \leq V_{sv} \leq V_{\max}$
— and other criteria specified by manufacturer (optionally)

Figure 2 — State transition diagram

6.2.1 Definition of states

6.2.1.1 CELM off state

State in which the CELM is not ready for activation.

6.2.1.2 CELM stand-by state

State in which the system is ready for activation.

6.2.1.3 CELM active state

State in which the system is activated. Operating conditions and requirements defined in [Clause 7](#) (for Type 1) or [Clause 8](#) (for Type 2) and manufacturer-defined collision prediction conditions and minimum functional requirements shall be satisfied.

6.2.2 Transition conditions

6.2.2.1 Transition from CELM off to CELM stand-by (key element 1 of [Figure 2](#))

The system shall transition from CELM off state to CELM stand-by state with the conditions of propulsion run cycle on and no system failure. If the system is equipped with a CELM on/off switch, it shall transition from CELM off state to CELM stand-by state with the conditions of propulsion run cycle on, no system failure.

6.2.2.2 Transition from CELM stand-by to CELM off (key element 2 of [Figure 2](#))

The system shall transition from CELM stand-by state to CELM off state with the conditions of system failure or propulsion run cycle off. If the system is equipped with a CELM on/off switch, it shall transition from CELM stand-by state to CELM off state when the driver deactivates CELM with the switch.

6.2.2.3 Transition from CELM stand-by to CELM active (key element 3 of [Figure 2](#))

6.2.2.3.1 Type 1 systems

The system shall transition from CELM stand-by to CELM active state when the system predicts a collision, no driver avoidance operation is detected, and operating conditions and requirements defined in [Clause 7](#) are satisfied.

NOTE See [Annex A](#) for examples of use cases of Type 1 systems.

6.2.2.3.2 Type 2 systems

The system shall transition from CELM stand-by to CELM active state when the system predicts a critical approach, the driver initiates an evasive manoeuvre, and operating conditions and requirements defined in [Clause 8](#) are satisfied.

6.2.2.4 Transition from CELM active to CELM stand-by state (key element 4 of [Figure 2](#))

The system shall transition from CELM active state to CELM stand-by state when the evasive manoeuvre is completed, or the driver overrides the system.

6.2.2.5 Transition from CELM active to CELM off (key element 5 of [Figure 2](#))

The system shall transition from CELM active state to CELM off state with the conditions of system failure or propulsion run cycle off. It is recommended for the transition to result in a gradual change of the yaw moment control.

6.3 Response to failure during CELM active state

Occurrence of a system failure during CELM active state should not result in conditions uncontrollable by the driver. Yaw moment control should fade out gradually.

6.4 Status indication

6.4.1 Active state

The system shall provide information to the driver when the system is in active state.

If the vehicle is equipped with AEB and/or lane departure prevention (LDP) systems, the display device may be commonly used to indicate the active state of multiple systems.

The driver shall be provided with an indication of active state. Specific implementation of the indication is left to the manufacturer.