
Safety of toys —

Part 4:

**Swings, slides and similar activity
toys for indoor and outdoor family
domestic use**

Sécurité des jouets —

*Partie 4: Balançoires, glissoires et jouets à activité similaire à usage
domestique familial intérieur et extérieur*

get full document from standards.iteh.ai



Reference number
ISO 8124-4:2014(E)

© ISO 2014

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements	6
4.1 General	6
4.2 Barriers	10
4.3 Rung ladders, stepladders and stairways	11
4.4 Entrapment	12
4.5 Stability of activity toys other than slides, swings and toys with crossbeams	14
4.6 Slides	15
4.7 Swings	18
4.8 Seesaws	21
4.9 Carousels and rocking toys	22
4.10 Inflatable activity toys	22
4.11 Paddling pools	24
5 Warnings and labelling	25
5.1 Labelling	25
5.2 Assembly and installation instructions	25
5.3 Maintenance instructions	26
5.4 Warnings	27
6 Test methods	28
6.1 Stability	28
6.2 Static strength	37
6.3 Dynamic strength of barriers and handrails	38
6.4 Determination of impact from swing elements	39
6.5 Test for head and neck entrapment	42
6.6 Toggle test	47
6.7 Test for protrusions	50
6.8 Durability test for suspension connectors and means of suspension	53
6.9 Deflation of inflatable activity toys	55
6.10 Static load test for paddling pools with non-inflatable walls	55
Annex A (informative) Rationale	56
Annex B (informative) Consumer information sheet for playground surfacing materials	60
Annex C (informative) Safety labelling guidelines for certain types of activity toys	61
Bibliography	63

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 181, *Safety of toys*.

This second edition cancels and replaces the first edition (ISO 8124-4:2010) and amendment 1 (ISO 8124-4:2010/Amd.1:2012). This edition incorporates the amendments ISO 8124-4:2010/Amd.1:2012 and ISO 8124-4:2010/Amd.2:2014.

ISO 8124 consists of the following parts, under the general title *Safety of toys*:

- *Part 1: Safety aspects related to mechanical and physical properties*
- *Part 2: Flammability*
- *Part 3: Migration of certain elements*
- *Part 4: Swings, slides and similar activity toys for indoor and outdoor family domestic use*
- *Part 6: Certain phthalate esters in toys and children's products*
- *Part 8: Age determination guidelines*

The following parts are under preparation:

- *Part 5: Determination of total concentration of certain elements in toys*
- *Part 7: Requirements and test methods for finger paints*

Introduction

This part of ISO 8124 is largely based upon existing standards in the European Union (EN 71-8) and in the United States (ASTM F1148).

However, it should not be construed that a toy manufactured in compliance with this part of ISO 8124 will be in full compliance with relevant national toy safety requirements in the market where the product is intended to be distributed. The user of this part of ISO 8124 is therefore advised to be aware of relevant national requirements.

Compliance with the requirements of this part of ISO 8124 will minimize potential hazards associated with toys resulting from their use in their intended play modes (normal use) as well as unintended play modes (reasonable foreseeable abuse).

This part of ISO 8124 will not, nor is it intended to, eliminate parental responsibility in the appropriate selection of toys. In addition, this part of ISO 8124 will not eliminate the need for parental supervision in situations where children of various ages may have access to the same toy(s).

Sample Document

get full document from standards.iteh.ai

Sample Document

get full document from standards.iteh.ai

Safety of toys —

Part 4:

Swings, slides and similar activity toys for indoor and outdoor family domestic use

1 Scope

This part of ISO 8124 specifies requirements and test methods for activity toys for domestic family use intended for children under 14 years to play on or in.

Products covered by this part of ISO 8124 include swings, slides, seesaws, carousels, rocking toys, climbing frames, fully enclosed toddler swing seats and other products intended to bear the mass of one or more children.

Products not included within the scope of this part of ISO 8124 are:

- a) fitness and sporting equipment unless attached to the activity toy;
- b) equipment intended for use in schools, day care centres, kindergartens, public playgrounds, restaurants, shopping centres and similar public places;
- c) juvenile care products such as, but not limited to, infant swings, playpens/enclosures, beds or furniture including picnic tables, cradle rockers and products specifically designed for therapeutic use.

Inflatable activity toys are included in the scope of this part of ISO 8124. However, a powered blower used to continuously inflate the toy is not covered by this part of ISO 8124 since it is considered to be a household appliance and covered by requirements given in IEC 60335-2-80.

See [A.1](#).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8124-1, *Safety of toys — Part 1: Safety aspects related to mechanical and physical properties*

3 Terms and definitions

For the purpose of this document, the terms and definitions given in ISO 8124-1 and the following apply.


3.1

activity toy

toy intended for family domestic use, intended to bear the mass of one or more children, the support structure of which remains stationary while the activity is taking place and which is intended for the performance by a child of any of the following activities: climbing, swinging, sliding, rocking, spinning, jumping, bouncing, crawling and creeping, or any combination thereof

EXAMPLE Swings, slides, carousels and climbing frames (see [Figure 1](#)).

Note 1 to entry: Aquatic toys, paddling pools, trampolines and ride-on vehicles are not considered as activity toys in the context of this part of ISO 8124.

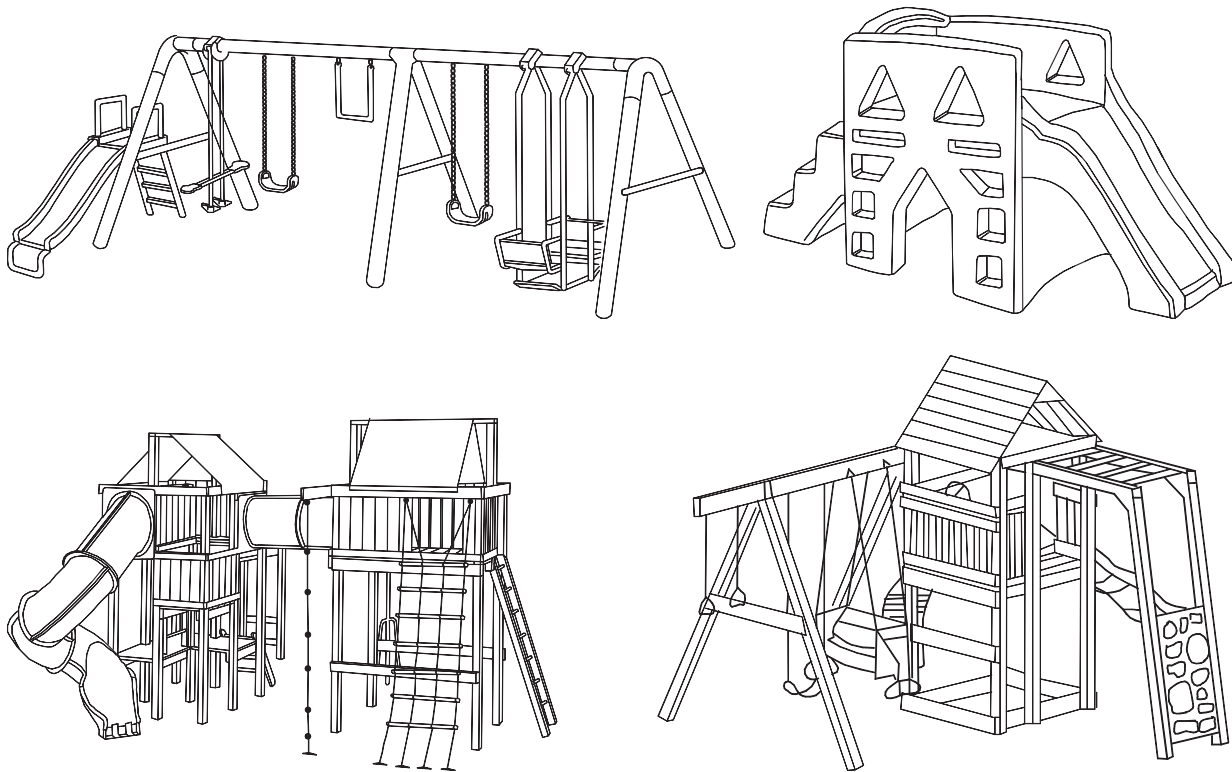

“Not to scale”

Figure 1 — Examples of activity toys

3.2

anchor

device used to fix the toy to the ground surface

3.3

attachment slide

slide for which access to the starting section is possible only by passing via other equipment or parts of other equipment

3.4

barrier

device intended to prevent children from falling from elevated surfaces

3.5

crossbeam

bar or beam which forms a main load-bearing part of the toy

3.6

entrapment

condition in which a body, part of a body or clothing becomes caught and impedes withdrawal

3.7

forced movement

movement where the direction and the extent of the child's movement is determined by the operation of the equipment, for example swinging, sliding, rocking or revolving

3.8**free height of fall**

greatest vertical distance from the intended body support, for example from the seat of a swing to the impact area below

3.9**free space**

space in, on or around the activity toy that can be occupied by a user undergoing a forced movement by the equipment, for example swinging, sliding, rocking or revolving

Note 1 to entry: The definition of free space does not include the three-dimensional area in which a falling movement takes place.

3.10**fully enclosed toddler swing seats**

fully enclosed single occupancy swing intended for young children who can sit upright unaided

Note 1 to entry: A seat is considered fully enclosed when a containment system is employed to support the child on all sides and in between the legs (see [Figure 2](#)).

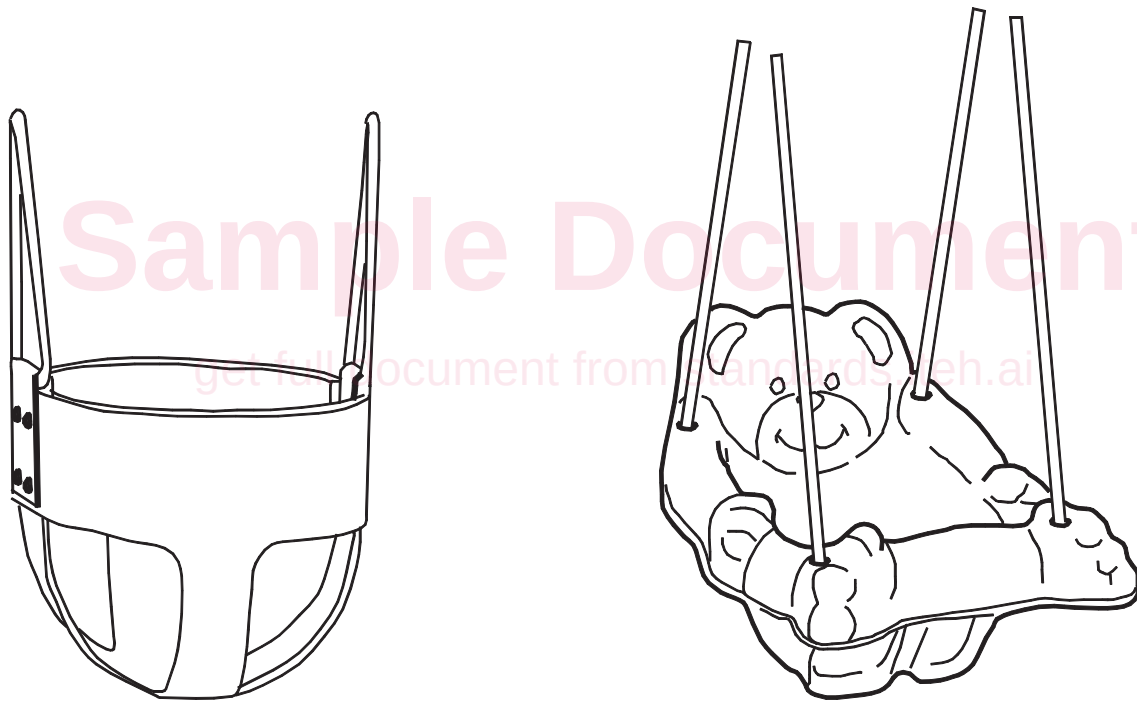


Figure 2 — Examples of fully enclosed toddler swing seat

3.11**impact area**

area of a swing element that comes into contact with the test mass during an impact test in accordance with [6.4](#) (determination of impact from swing elements)

3.12**infant swing**

stationary unit with a frame and a powered mechanism enabling an infant to swing in a seated position

Note 1 to entry: An infant swing is intended for use with infants from birth until the child is able to sit upright unassisted.

3.13**handrail**

rail intended to assist the users to balance or steady themselves

3.14

platform

any elevated substantially horizontal surface intended to be used by a child as a place for play or as a transition between components

Note 1 to entry: Slide starting sections less than 129 000 mm² are not considered platforms.


3.15

slide

structure with inclined surface(s) on which the user slides in a defined track

See Figure 3.

Note 1 to entry: Note1 to entry: Inclined planes, designed primarily for other purposes, such as roofs and ramps, do not constitute slides.

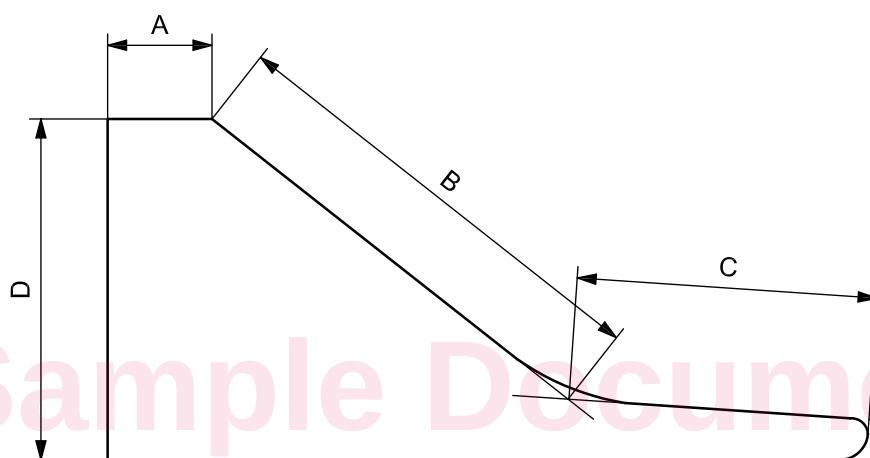

Key

- A starting section
- B sliding section
- C run-out section
- D height of slide
- B+ C slide length

NOTE The dimensions A, B, and C are measured at the centreline of the sliding surface. Each of these sizes represents one of the zones of the sliding surface. Each zone of the sliding surface is determined by the intersection of the curve of the sliding surface (taken at the bottom of the sliding surface) and the bisecting line of the angle formed between the zones of the sliding surfaces.

Figure 3 — Diagrammatic representation of a slide

3.16

suspension connector

device that forms the direct contact between a crossbeam and the swing device


See Figure 4.

3.17

swing

structure, normally intended to be attached to or incorporating a crossbeam, suspension connectors and a swing device with swing element, means of suspension and suspension coupling

See Figure 4.

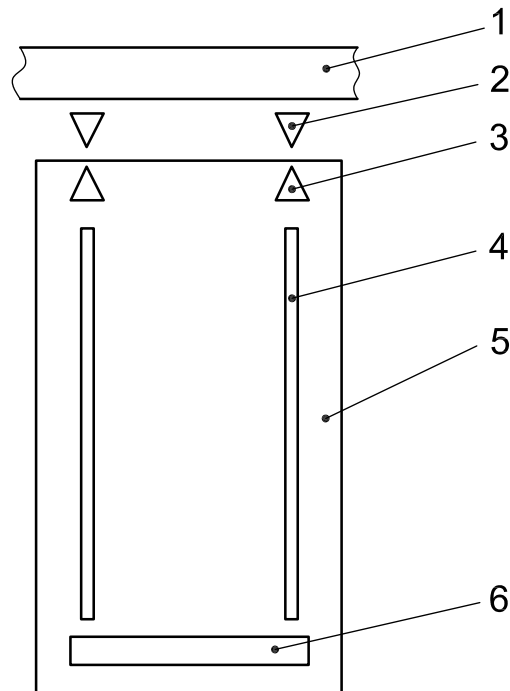**Key**

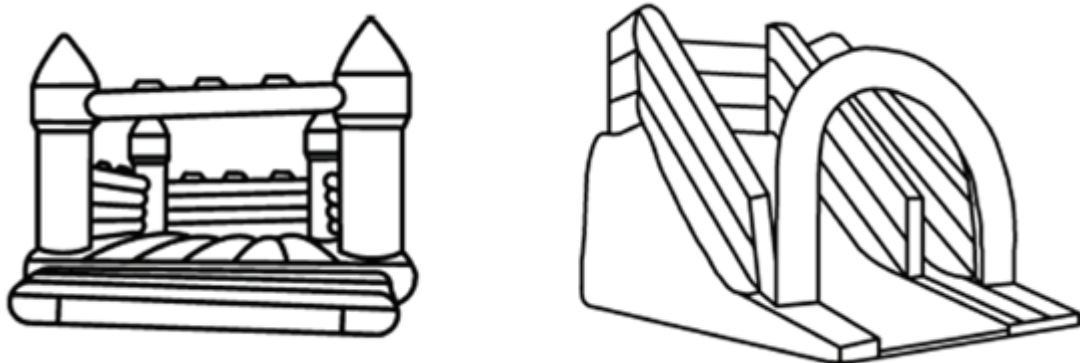
- 1 crossbeam/support member
- 2 suspension connector
- 3 suspension coupling
- 4 means of suspension
- 5 swing device
- 6 swing element (e.g. seat, rings, bar, gondola)

Figure 4 — Diagrammatic representation of a swing**3.18****inflatable activity toy**

activity toy, with a structure made of flexible material, inflated by air, intended for children to play on or in

EXAMPLE Bouncy castle, inflatable slides (see [Figure 5](#)).

Note 1 to entry: There are two types of inflatable activity toys: one is kept inflated by a closure (valve) once inflated; the other is kept inflated only by the continuous input of air from a blower.

**Figure 5 — Examples of inflatable activity toys**

3.19

paddling pool

toy pool with a maximum depth of water of 400 mm measured between the overflow level and the deepest point within the pool

Note 1 to entry: A permanently installed pool would not be considered to be a toy.

Note 2 to entry: Examples of typical paddling pools can be found in the guidance document on the application of the European directive on the safety of toys (2009/48/EC), (http://ec.europa.eu/enterprise/sectors/toys/files/gd_doc8pools_en.pdf).

4 Requirements

4.1 General

See A.4.1.

4.1.1 Static strength

Activity toys, other than swings, shall not collapse when tested in accordance with [6.2.1](#) (strength of toys other than swings). After testing, the toy shall continue to comply with the relevant requirements of this part of ISO 8124. Requirements for swings are given in [4.7](#) (swings).

4.1.2 Maximum height

See A.4.1.2.

There shall be no part of the activity toy designed to encourage the child to climb, sit on or stand on, with a height of 2 500 mm or more when measured from the ground.

This does not include barriers, roofs, etc., that are not intended to be climbed, sat on or stood on.

Barriers, roofs, etc., that are not intended to be climbed shall be designed in such a way that climbing is not encouraged.

4.1.3 Corners and edges

See A.4.1.3.

Exposed corners and edges shall be rounded.

Corners and exposed edges on moving parts shall have a minimum radius of 3 mm. This does not apply to swing elements with a mass of 1 000 g or less, the corners and edges of which shall be rounded.

4.1.4 Protruding parts

4.1.4.1 General

Protruding parts (such as bolt ends and nuts) shall be recessed or be protected in such a way that they do not constitute an entrapment hazard or other hazard to users.

If protrusions cannot be placed within the 50 mm outside diameter test gauge defined in [6.7.1](#) (all protrusions), they are considered to be inaccessible and are exempted from these requirements (see [Figure 6](#)).

Rope protrusions are specifically exempted from the requirements of [4.1.4](#).

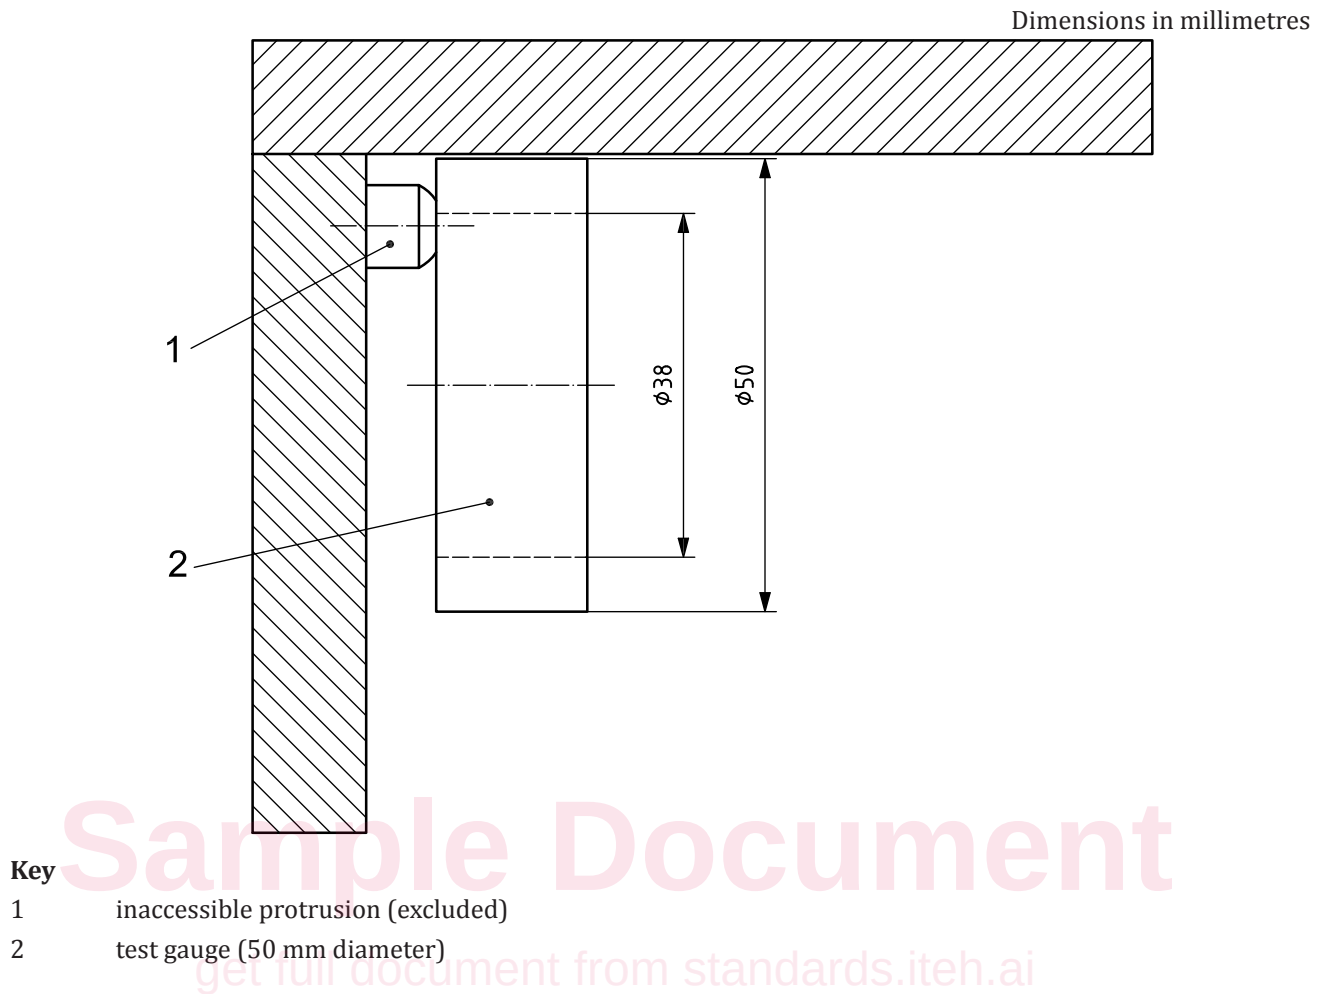
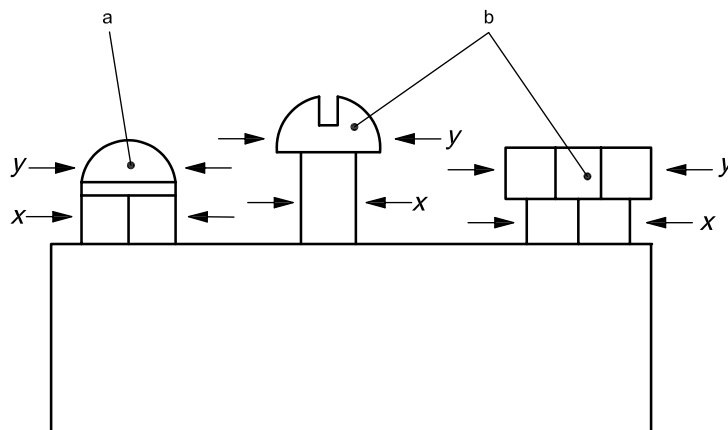


Figure 6 — Example of excluded protrusion

4.1.4.2 All protrusions

No protrusion shall extend beyond the full depth of the test gauges when tested in accordance with [6.7.1](#).

No protrusion shall terminate in a dimension greater than that of the base dimension (see [Figure 7](#)). In the case of hardware, the base dimension shall be defined as the major dimension of the attachment nut or bolt head.


**Key**

- a Pass ($y \leq x$).
 b Fail ($y > x$).

Figure 7 — Examples of protrusion configurations**4.1.4.3 Upright protrusions**

Protrusions that fit within any of the gauges defined in 6.7.1 and that project upwards from a horizontal plane shall have no projection perpendicular or at an acute angle to the plane of the initial surface extending more than 3 mm in height (see Figure 8).

For example, the hemispherical ends of bolts are exempt from this requirement because they do not project perpendicular to the plane of the initial surface.

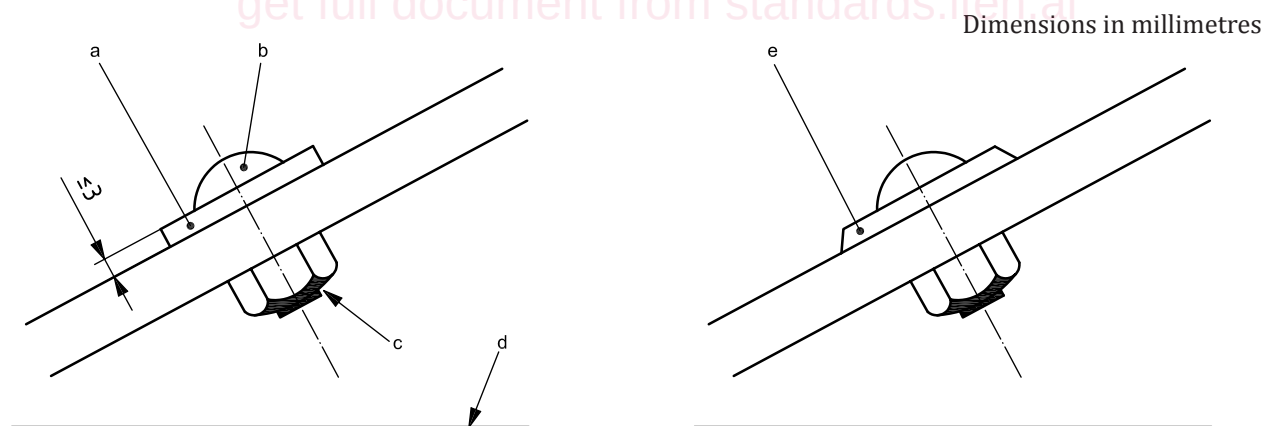**Key**

- a Protrusions that project perpendicular or at an acute angle to the plane of the initial surface with the axis inclined upward from the horizontal plane shall comply with the 3 mm maximum requirement.
 b Hemispherical end exempted from the 3 mm maximum requirement.
 c Protrusions with axis horizontal or below horizontal shall not extend beyond the face of the test gauges defined in 6.7.1.
 d Horizontal plane.
 e Protrusions that project at an obtuse angle to the plane of the initial surface are exempt from the 3 mm maximum requirement.

Figure 8 — Upright protrusion test


4.1.4.4 Motion rides

Protrusions on the front and rear surfaces of suspended members of swinging elements and those on the interior surface of slides shall not protrude beyond the full depth of the test gauge when tested in accordance with 6.7.2 (protrusions in motion rides).

4.1.4.5 Slides

Slides, including protective barriers and their means of attachment, and transition areas pose a greater risk of entrapment than other areas of play equipment. Therefore, the following requirements apply to slides and sliding devices.

Any accessible protrusion that allows the 77 mm test gauge defined in 6.7.1.2 to pass over it shall have no projection perpendicular or at an acute angle to the plane of the initial surface extending more than 3 mm. The areas subject to this requirement are outlined in Figure 9. The outside surface of tunnel slides that are completely enclosed are exempt from this requirement.

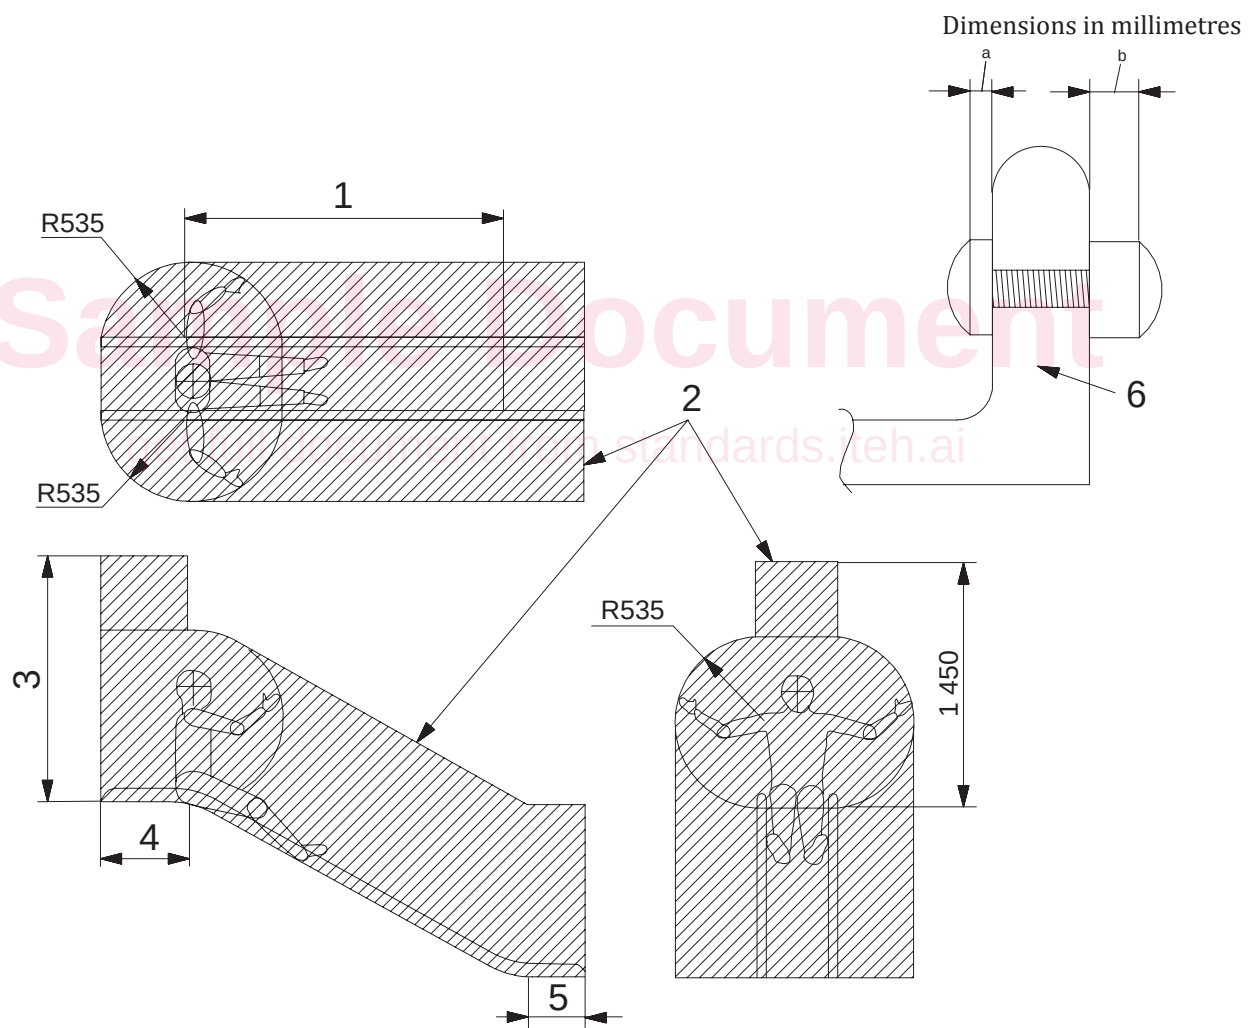

Key

- | | | | |
|---|--|---|------------------|
| 1 | sliding surface | 4 | starting section |
| 2 | shaded areas representing non-entrapment/
protrusion zone | 5 | run-out section |
| 3 | standing height | 6 | slide side rail |