TECHNICAL REPORT

# ISO/TR 18476

First edition
2017-06

# Ophthalmic optics and instruments — Free form technology — Spectacle lenses and measurement

*Optique et instruments ophtalmiques — Technologie free form — Verres de lunettes et mesurage*

Sample Document

get full document from standards.iteh.ai

Reference number
ISO/TR 18476:2017(E)

© ISO 2017

ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

Sample Document

get full document from standards.iteh.ai



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org



© ISO 2017 – All rights reserved

ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

# Contents

Page

**Foreword** ... **iv**

**1 Scope** ... **1**

**2 Normative references** ... **1**

**3 Terms and definitions** ... **1**

**4 Technical introduction** ... **1**
4.1 Preliminaries ... 1
4.2 What is free form? ... 1
4.3 Does free form equal better vision? ... 2
4.4 Classification ... 2

**5 Manufacturing** ... **3**
5.1 General ... 3
5.2 Conventional surfacing ... 4
5.3 Free form surfacing ... 5
5.4 Comparison of conventional and free form manufacturing ... 6

**6 Potential benefits of free form lens calculation** ... **7**
6.1 Oblique astigmatism ... 7
6.2 Limitations of conventional lenses ... 9
6.3 Potential benefit of free form lens design ... 10
6.4 Optimization for prescription ... 11
6.5 Customization for the as-worn position ... 12
6.5.1 Explaining the as-worn position ... 12
6.5.2 As-worn position and verification power ... 13
6.6 Customization for the frame size ... 14
6.7 Personalization of the lens design ... 15

**7 Measurement and quality control** ... **16**
7.1 Lens performance ... 16
7.2 Conformity with standards ... 16
7.3 Design integrity and process control ... 17
7.3.1 General ... 17
7.3.2 Surface shape measurement ... 17
7.3.3 Through power measurement ... 17
7.4 Measuring the as-worn position ... 18
7.5 Inspection gates of the manufacturing process ... 21

**Annex A** (informative) **Typical dispensing flowchart** ... **22**

**Annex B** (informative) **Measurement technology** ... **23**

**Annex C** (informative) **Glossary of terms and their descriptions** ... **28**

**Bibliography** ... **30**

Sample document
get full document from standards.iteh.ai

© ISO 2017 – All rights reserved


ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

# Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www. iso. org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www. iso. org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso. org/iso/foreword. html.

Sample Document

This document was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 7, *Ophthalmic optics and instruments*.

get full document from standards.iteh.ai


© ISO 2017 – All rights reserved
ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

# Ophthalmic optics and instruments — Free form technology — Spectacle lenses and measurement

## 1 Scope

This document outlines all the steps from refraction to dispensing of spectacles, with particular attention to the benefits added by using free form technology, and provides a collection of relevant terms and descriptions.

This document does not contain the proprietary features of lens designs provided by suppliers.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at http://www.electropedia.org/

— ISO Online browsing platform: available at http://www.iso.org/obp

Sample Document
get full document from standards.iteh.ai

## 4 Technical introduction

### 4.1 Preliminaries

**4.1.1** There are various ways of spelling the term “free form”. This document uses two separate words.

**4.1.2** There are various terms explaining spectacle lens optical power design which are commonly used such as “optical function”, “optical characteristics”, “optical properties”, or “design property”. For purpose of simplicity, this document uses the word “characteristics”. The phrase “optical properties” is used simply to describe the optical results of the geometry of the lens, but not an intended design or characteristic.

**4.1.3** A typical flowchart including refraction, dispensing and manufacturing is shown in Figure A.1 (see Annex A).

**4.1.4** A glossary of terms and their descriptions is provided in Annex C.

### 4.2 What is free form?

In ophthalmic optics, the term “free form surfacing” refers to a spectacle lens surfacing process that is capable of producing continuous, smooth, non-symmetrical lens surfaces that lack point, axial or plane symmetry and are described by three-dimensional coordinates created by mathematical formulation. This design and surfacing process enables optimization of the lens performance.

Conventional lens surfacing technology which smooths and polishes using hard lap tools can produce only simple spherical or toroidal lens surfaces.

© ISO 2017 – All rights reserved

ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

Modern free form lens surfacing methods are now capable of generating surfaces that are much more complex than simple spherical and toroidal surfaces, allowing local optical laboratories to manufacture progressive-power and other lens designs directly onto the lens blank with the required prescription curves. In order to produce these complex surface shapes, free form surfacing utilizes precise, computer-driven control of the cutter with three or more axes of movement. Often, the surface is machined using single-point diamond turning and then polished using flexible lap tools.

A "free form process" can thus be summarized as a lens surfacing process using Computer Numeric Control (CNC) devices capable of producing a free form surface with optical characteristics on either or both side(s) of the lens.

It should be noted that when simpler surfaces that can be manufactured by conventional methods are produced by free form processing, these simpler surfaces should not be termed free form surfaces nor the resulting lenses free form lenses.

## 4.3 Does free form equal better vision?

As an enabling technology, free form surfacing makes possible the application of optical characteristics, using information specific to the individual wearer, immediately prior to lens manufacture.

The use of free form surfacing as a manufacturing method does not guarantee any visual benefit to the wearer. It is true that the soft lap tool polishing process used during free form surfacing is not subject to the rounding errors of conventional lens surfacing. Conversely, it can maintain an accurately generated free form surface. Hence, soft lap polishing actually relies on more extensive process engineering and quality control in order to achieve high quality lens surfaces.

Sample Document

Free form surfacing provides a powerful vehicle for overcoming the limitations of conventional semi-finished lens manufacturing when utilized in conjunction with sufficiently advanced optical design software by delivering lenses custom-designed for the specific visual requirements of the individual wearer. It becomes possible to optimize the optical design of the lens individually (i.e. upon the exact prescription power and orientation of the fitted lens) before the lens is actually manufactured, in order to preserve the intended optical lens characteristics for each and every wearer.

In addition to preserving the intended optical lens characteristics for any combination of prescription power or as-worn position, it is also possible to customize other features of the lens design for the individual wearer. The lens can be adapted further in order to modify the corridor length for the fitting height in small increments, optimize the viewing zones for occupational demands, and adjust peripheral power gradients for the head-eye movement behaviour, and so on. It is important to note, however, that only custom-designed free form lenses will offer this level of sophistication and design properties for the wearer.

Nevertheless, without the application of real-time optical design to optimize the lens design for the individual wearer, the potential visual advantages of using free form surfacing are relatively small.

## 4.4 Classification

With free form surfacing, an optical laboratory can surface a variety of lens designs directly onto a semi-finished lens blank in addition to the prescription curves that are normally applied. With two separate surfaces to work with, the optical characteristics, addition power, if any, and prescription components of a free form lens can be applied to the lens blank in a variety of possible lens surface configurations. Each type of free form lens represents a particular combination of factory-moulded and directly-surfaced lens curves. The lens surfaces involved range in complexity from simple spherical surfaces to individually-optimized progressive power surfaces that simultaneously fulfil all of the prescription requirements of the wearer.


© ISO 2017 – All rights reserved
ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

When free form surfacing is used to transfer the optical characteristics onto the lens blank, free form progressive-power lenses may be classified by the distribution of the optical characteristics between the front and back surfaces (see Figure 1).


a) *Front surface free form lenses* (A in Figure 1) employ a directly-surfaced progressive surface with the full addition power on the front and conventionally-surfaced prescription curves on the back. The progressive optics are surfaced directly onto the lens. While less common, this configuration may, for instance, be utilized to achieve broader prescription ranges.

b) *Dual-surface free form lenses* (B in Figure 1) employ a factory-moulded (or, in some cases, a directly-surfaced) progressive-like surface with a component of the total addition power on the front and a digitally-surfaced progressive surface with, for instance, the remaining addition power that has been combined with the prescription curves on the back. The progressive-power optics are distributed between both lens surfaces.

c) *Back-surface free form lenses* (C in Figure 1) employ a factory-moulded spherical surface on the front and a directly-surfaced progressive surface that has been combined with the prescription curves on the back. The progressive lens design may be a standard (fixed) design or an optically-optimized design.

For the purpose of simplicity, the rest of this document will refer only to full back surface lenses (C in Figure 1).

Sample Document
get full document from standards.iteh.ai

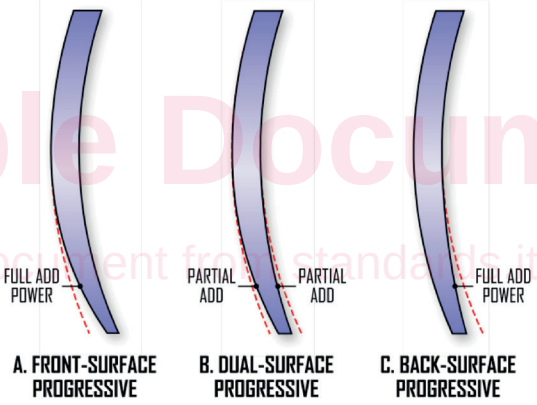


NOTE Image by Darryl Meister. Reproduced with permission from Carl Zeiss Vision GmbH, USA.

**Figure 1 — Classification of free form progressive-power lenses by the distribution of the addition power between the front and back surfaces**

## 5 Manufacturing

### 5.1 General

Whatever the process used to manufacture the lens, the lens manufacturing cycle is the same. The general lens manufacturing flow is described in Figure 2.




**Figure 2 — General lens manufacturing flow with semi-finished lens blanks and surfacing**

© ISO 2017 – All rights reserved

ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

## 5.2 Conventional surfacing

Conventional surfacing is a four-step process for finishing the unfinished back surface of a semi-finished lens blank with the required prescription curves (see Figure 3). Semi-finished lens blanks have an optical-quality front surface that has been moulded by a manufacturer.


In the first step termed "blocking", the semi-finished lens blank is mounted by its finished surface on a support to hold it for the next three steps.

In the second step, the unfinished surface of the lens is machined by a generator to approximately the required shape using a grinding, turning or milling process.

In the third step, known as fining or smoothing, the worked surface is ground to the precise surface shape by a toroidal smoothing/polishing machine that rapidly moves the lens surface in a cyclical motion over a hard lap tool fitted with abrasive pads that matches the intended curvature of lens surface. This brings the lens surface to a quality suitable for polishing.

In the fourth and final manufacturing step, known as polishing, the abrasive pad is replaced by a polishing pad. The lens surface is once again cycled over the hard lap tool in a toroidal smoothing/polishing machine, while the pad is soaked with polishing slurry. The lens is then "de-blocked".

See Figure 3 a) and b). In Figure 3 b) the hard lap tool copies the fixed two principal meridians' curvatures to the lens's concave surface.

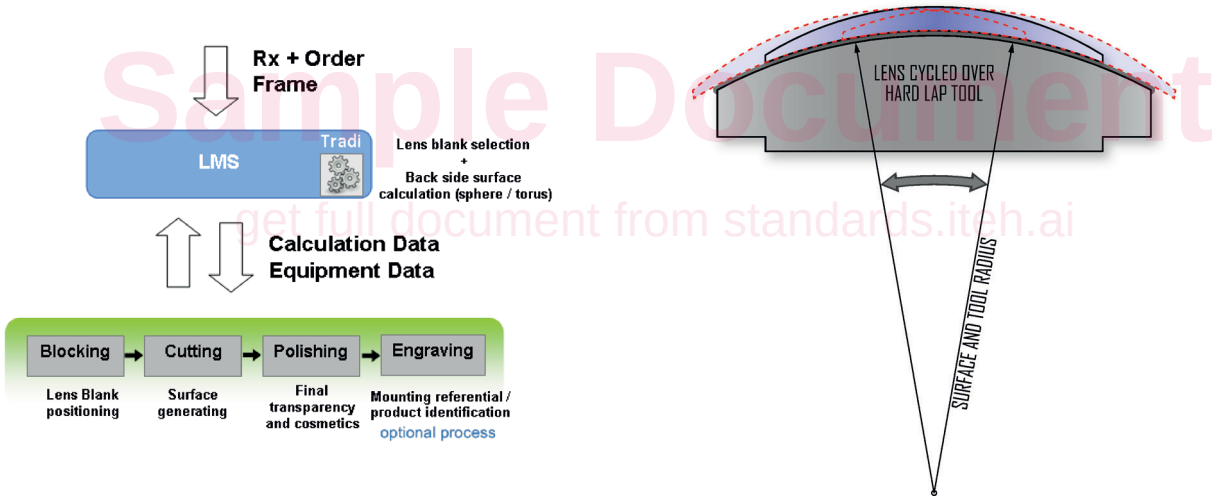


**a) Scheme of conventional surfacing process** **b) Fining process used in conventional surfacing**

**Figure 3 — Conventional surfacing process**

The simplest generators are two-axis machines that utilize a diamond-impregnated grinding wheel to generate a spherical or toroidal lens surface. The emphasis of a conventional generating process is on throughput and rapid removal of lens material. Any inaccuracy in the shape of the generated lens surface is ultimately corrected during the fining process by the hard lap tool. In particular, the fining process with hard lap tools exploits the rotational or meridional circular symmetry of spherical or toroidal lens surfaces, since these surfaces can be cycled over the hard lap tool using a uniform rocking motion that produces relatively constant fining and polishing pressure over the lens blank [see Figure 3 b)]. The use of hard lap tools during the fining and polishing processes therefore restricts the range of possible lens surface shapes to simple spherical and toroidal surfaces. Moreover, in practice, hard lap tools are only available in discrete increments of surface curvature. Due to the need for reasonable inventory requirements, hard lap tools are often stocked in eighth-dioptre (0,12 D) or tenth-dioptre (0,10 D) steps for the sphere power, although larger laboratories may stock tools in 0,06 D steps. This can potentially result in rounding errors of up to ±0,05 D from the desired surface curvature, which will limit the



© ISO 2017 – All rights reserved
ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017

accuracy of the prescription power of the surfaced lens and increase the likelihood of failure during a quality inspection.

## 5.3 Free form surfacing

In conjunction with the Laboratory Management System (LMS), a *Lens Design Server* (LDS; computer and appropriate sophisticated software) is first used to calculate a *surface description file* (SDF) (also known as a "*points file*") from the prescription and lens order parameters. The points file contains surface height (and possibly slope) data [see Axis 1 in Figure 4 b)] that characterize the required three-dimensional geometry of the lens surface to be cut[7]. The required lens surface is then generated from the points file using a CNC cutting process. With three or more axes of precisely controlled movement, the single-point cutting tools of these generators can produce virtually any continuously smooth surface shape with a high degree of accuracy and smoothness that requires minimal polishing.

The machine may also orientate the cutter to be at right angles to the orientation of the lens surface in the immediate area in which it is cutting; hence, there may be three or five axis machines, double that if they can surface the left and right lenses simultaneously.

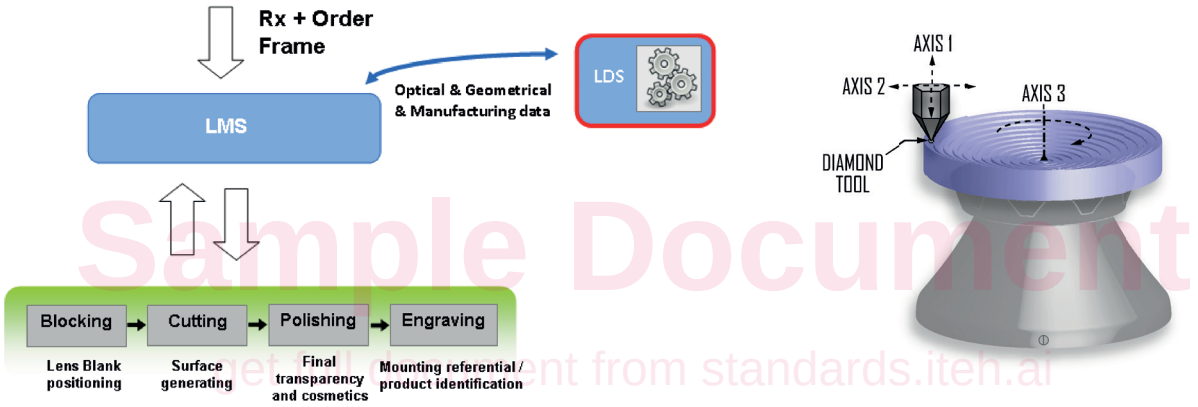


**a) Scheme of free form surfacing process** **b) Free form CNC machining**

**Figure 4 — Free form surfacing process**

With most free form lenses, the prescription powers are combined into the required lens design, and then processed as a single surface onto the back of a semi-finished lens blank, as in Figure 2[8]. This allows the fabrication of a lens design and the prescription curves in a single step. The worked lens surface is then polished by a free form polisher using a soft lap polishing tool that is also dynamically controlled by a computer. Unlike hard lap tools, which are only available in specific increments of surface curvature, soft lap tools can polish a lens surface to within very small increments.

Because this technology allows the laboratory to fabricate complex lens design directly onto the lens blank, free form surfacing is sometimes referred to as *direct surfacing*. Because free form lens surfacing relies on computer (points) files that describe the desired surface shape, free form lens surfacing is also referred to as *digital surfacing*. However, the term "digital surfacing" is often used more generally to refer to any lens surfacing process that utilizes free form surfacing equipment, even when surfacing conventional spherical or toroidal surfaces, which makes the use of this particular term potentially misleading.

In summary, a conventional surfacing process cannot produce the complex surfaces utilized for complicated lens designs like progressive-power lenses due to limitations in both the range of possible surface-shape geometries and the quality of the finished surface produced by conventional generators. Free form surfacing is, however, a more sophisticated surfacing process that is capable of producing virtually any continuously smooth surface, including aspheric, atoroidal, and progressive-power surfaces, in addition to basic spherical and toroidal surfaces. This allows local optical laboratories to

© ISO 2017 – All rights reserved

ISO/TR 18476:2017 • https://standards.iteh.ai/catalog/standards/iso/ef5d5f92-1874-43ab-85ea-9530803e68c7/iso-tr-18476-2017