

---

---

**Natural gas — Supporting information  
on the calculation of physical  
properties according to ISO 6976**

*Gaz naturel — Informations supplémentaires pour le calcul des  
propriétés physiques selon l'ISO 6976*

Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)



# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

# Contents

Page

|                                                                                     |            |
|-------------------------------------------------------------------------------------|------------|
| <b>Foreword</b>                                                                     | <b>vi</b>  |
| <b>Introduction</b>                                                                 | <b>vii</b> |
| <b>1 Scope</b>                                                                      | <b>1</b>   |
| <b>2 Normative references</b>                                                       | <b>1</b>   |
| <b>3 Terms and definitions</b>                                                      | <b>1</b>   |
| <b>4 Symbols, units and abbreviated terms</b>                                       | <b>1</b>   |
| 4.1 Quantities                                                                      | 1          |
| 4.2 Subscripts                                                                      | 3          |
| 4.3 Superscripts                                                                    | 3          |
| 4.4 Abbreviated terms                                                               | 3          |
| <b>5 Enthalpy of combustion of the ideal gas and its variation with temperature</b> | <b>4</b>   |
| 5.1 Preamble                                                                        | 4          |
| 5.2 Standard enthalpy of combustion at 25 °C                                        | 4          |
| 5.3 Standard enthalpy of combustion at other temperatures                           | 5          |
| 5.4 Formulation of the ideal-gas enthalpy                                           | 6          |
| 5.5 Illustrative examples                                                           | 7          |
| 5.6 Uncertainty in enthalpy of combustion                                           | 8          |
| <b>6 Non-ideality: Variation of real-gas enthalpy of combustion with pressure</b>   | <b>9</b>   |
| 6.1 Preamble                                                                        | 9          |
| 6.2 Formulation of the enthalpic correction                                         | 10         |
| 6.3 Estimation of the enthalpic correction                                          | 12         |
| 6.4 Conclusion                                                                      | 13         |
| <b>7 Non-ideality: Compression factor effect on volume-basis calorific values</b>   | <b>13</b>  |
| 7.1 Compression factor                                                              | 13         |
| 7.2 Virial equation of state                                                        | 14         |
| 7.3 Estimation of mixture compression factor                                        | 15         |
| 7.4 Limitations of the modified IGT-32 method                                       | 17         |
| 7.5 Uncertainty in compression factor                                               | 18         |
| <b>8 Quantitation of volumetric non-ideality</b>                                    | <b>18</b>  |
| 8.1 Second virial coefficients of pure components                                   | 18         |
| 8.1.1 Preliminary procedures                                                        | 18         |
| 8.1.2 Improved procedure                                                            | 19         |
| 8.2 Summation factors of pure components                                            | 21         |
| 8.2.1 Overview                                                                      | 21         |
| 8.2.2 Major components of natural gas                                               | 21         |
| 8.2.3 Hydrogen and helium                                                           | 22         |
| 8.3 Compression factors of the permanent gases                                      | 23         |
| 8.4 Pure component uncertainties                                                    | 25         |
| 8.4.1 Uncertainty of second virial coefficients                                     | 25         |
| 8.4.2 Truncation error                                                              | 25         |
| 8.4.3 Linearization error                                                           | 27         |
| 8.4.4 Berlin versus Leiden                                                          | 28         |
| 8.4.5 Hydrogen and helium                                                           | 29         |
| 8.4.6 Water                                                                         | 30         |
| 8.4.7 Combination of uncertainties                                                  | 31         |
| 8.5 Mixture uncertainty                                                             | 31         |
| <b>9 Miscellaneous data</b>                                                         | <b>31</b>  |
| 9.1 Atomic weights of the elements                                                  | 31         |
| 9.1.1 Atomic weights 2007                                                           | 31         |
| 9.1.2 Atomic weights 2009 and 2011                                                  | 32         |
| 9.1.3 Discussion                                                                    | 34         |

|           |                                                                                           |           |
|-----------|-------------------------------------------------------------------------------------------|-----------|
| 9.2       | Composition and molecular weight of dry air .....                                         | 35        |
| <b>10</b> | <b>Effects of water vapour on calorific value .....</b>                                   | <b>36</b> |
| 10.1      | Preamble .....                                                                            | 36        |
| 10.2      | Excluded volume effect .....                                                              | 37        |
| 10.3      | Latent heat (enthalpic) effect .....                                                      | 38        |
| 10.4      | Compression factor effect .....                                                           | 39        |
| 10.5      | Combination of effects .....                                                              | 39        |
| 10.6      | Spectator water .....                                                                     | 40        |
| 10.7      | Effect of humid air .....                                                                 | 41        |
| 10.7.1    | Preamble .....                                                                            | 41        |
| 10.7.2    | Stoichiometric combustion with oxygen .....                                               | 42        |
| 10.7.3    | Combustion of dry gas with excess dry air .....                                           | 42        |
| 10.7.4    | Combustion of wet gas with excess dry air .....                                           | 43        |
| 10.7.5    | Combustion of wet gas with excess humid air .....                                         | 43        |
| <b>11</b> | <b>Summary, discussion and selection of the calorific value of methane .....</b>          | <b>45</b> |
| 11.1      | Standard enthalpy of combustion .....                                                     | 45        |
| 11.1.1    | Background .....                                                                          | 45        |
| 11.1.2    | Selection of data .....                                                                   | 45        |
| 11.1.3    | Recalculation of Rossini values .....                                                     | 46        |
| 11.1.4    | Evaluation of selected data .....                                                         | 48        |
| 11.1.5    | Selected value and uncertainty .....                                                      | 52        |
| 11.2      | Derived calorific values .....                                                            | 52        |
| 11.3      | Comparisons between calorimetric methodologies .....                                      | 54        |
| <b>12</b> | <b>Calorific values on a mass basis .....</b>                                             | <b>56</b> |
| 12.1      | Calorific values on a mass basis for components of natural gas .....                      | 56        |
| 12.2      | Alternative (non-normative) method of calculation for mass-basis calorific values .....   | 57        |
| <b>13</b> | <b>Calorific values on a volume basis .....</b>                                           | <b>60</b> |
| 13.1      | Calorific values on a volume basis for components of natural gas .....                    | 60        |
| 13.2      | Alternative (non-normative) method of calculation for volume-basis calorific values ..... | 60        |
| <b>14</b> | <b>Approximate conversion between reference conditions .....</b>                          | <b>63</b> |
| 14.1      | Factors for conversion between metric reference conditions .....                          | 63        |
| 14.2      | Equations for conversion between metric reference conditions .....                        | 65        |
| 14.3      | Expression of non-SI reference (base) pressures in metric units .....                     | 65        |
| <b>15</b> | <b>Mathematical and methodological issues relating to estimation of uncertainty .....</b> | <b>66</b> |
| 15.1      | Principles .....                                                                          | 66        |
| 15.2      | Input data .....                                                                          | 68        |
| 15.2.1    | Preamble .....                                                                            | 68        |
| 15.2.2    | Reference conditions .....                                                                | 68        |
| 15.2.3    | Composition data .....                                                                    | 68        |
| 15.2.4    | Physical property data .....                                                              | 69        |
| 15.3      | Uncertainty of the calculational method .....                                             | 70        |
| 15.4      | Evaluation of sensitivity coefficients .....                                              | 70        |
| 15.4.1    | Preamble .....                                                                            | 70        |
| 15.4.2    | Analytical method .....                                                                   | 71        |
| 15.4.3    | Finite difference method .....                                                            | 73        |
| 15.4.4    | Monte Carlo method .....                                                                  | 73        |
| <b>16</b> | <b>Detailed derivation of uncertainty equations in ISO 6976:2016 .....</b>                | <b>73</b> |
| 16.1      | Principles and assumptions .....                                                          | 73        |
| 16.2      | General formulation .....                                                                 | 74        |
| 16.3      | Effects of correlations .....                                                             | 75        |
| 16.3.1    | Correlation between mole fractions .....                                                  | 75        |
| 16.3.2    | Correlation between molar masses .....                                                    | 76        |
| 16.3.3    | Correlation between physical properties .....                                             | 78        |
| 16.4      | Uncertainty equations for basic properties .....                                          | 78        |
| 16.4.1    | Molar mass .....                                                                          | 78        |

|           |                                                            |           |
|-----------|------------------------------------------------------------|-----------|
| 16.4.2    | Molar-basis gross calorific value.....                     | 79        |
| 16.4.3    | Molar-basis net calorific value.....                       | 79        |
| 16.4.4    | Summation factor.....                                      | 80        |
| 16.4.5    | Compression factor.....                                    | 80        |
| 16.5      | Uncertainty equations for compound properties.....         | 81        |
| 16.5.1    | Mass-basis gross calorific value.....                      | 81        |
| 16.5.2    | Mass-basis net calorific value.....                        | 82        |
| 16.5.3    | Volume-basis gross calorific value.....                    | 83        |
| 16.5.4    | Volume-basis net calorific value.....                      | 84        |
| 16.5.5    | Density.....                                               | 86        |
| 16.5.6    | Relative density.....                                      | 87        |
| 16.5.7    | Gross Wobbe index.....                                     | 88        |
| 16.5.8    | Net Wobbe index.....                                       | 89        |
| 16.6      | Repeatability and reproducibility.....                     | 91        |
| <b>17</b> | <b>Computer implementation of recommended methods.....</b> | <b>92</b> |
| 17.1      | Compiled BASIC shareware program.....                      | 92        |
| 17.2      | Spreadsheet implementation.....                            | 94        |
|           | <b>Bibliography.....</b>                                   | <b>97</b> |

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

The committee responsible for this document is ISO/TC 193, *Natural gas*, Subcommittee SC 1, *Analysis of natural gas*.

get full document from [standards.iteh.ai](http://standards.iteh.ai)

## Introduction

Both international and intranational custody transfer of natural gas usually require precise determination of both the quantity and the quality of the gas to be traded. ISO 6976:2016, which cancels and replaces ISO 6976:1995, specifies methods for the calculation of those properties, often known as the combustion properties, which (in part) describe gas quality, namely gross (superior) and net (inferior) calorific value, density, relative density, gross and net Wobbe index. The methods provide the means of calculating the properties, including uncertainties, of any natural gas, natural gas substitute, or similar combustible gaseous fuel of known composition at commonly used reference conditions.

Some 80-odd years ago, in the Introduction to Hyde and Mills' classic text *Gas Calorimetry*, Sir Charles Vernon ('CV') Boys wrote the words<sup>[109]</sup> “ ... I hesitate to give the number of actual tests of the calorific value of gas which are made every year, but ... it will be evident that any machinery set up to ascertain its value must be extensive ... The fact is that no single commodity generally purchased by the public is so carefully watched and maintained of its guaranteed quality as gas ... ”. Since that time, the technology of gas calorimetry has changed beyond either recognition or imagination, but the truth of the sentiment expressed remains unchanged and refers every bit as much to 2017 as it did to 1932.

This document acts as a repository for those manifold technical details which justify and explain the methods presented in the new third (2016) edition of ISO 6976 but which are not directly needed in its everyday routine implementation. In short, it is conceived and intended as a complete(ish) knowledge base which provides full and proper technical authentication of ISO 6976.

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)

# Natural gas — Supporting information on the calculation of physical properties according to ISO 6976

## 1 Scope

This document acts as a repository for those manifold technical details which justify and explain the methods presented in the third edition of ISO 6976 but which are not directly needed in the everyday routine implementation of the standard.

Each main clause addresses a specific aspect of the calculational method described in ISO 6976:2016, and is intended to be self-sufficient and essentially independent of each other clause. For this reason, the user should not expect the whole to be accessible to study as a sequentially coherent narrative.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6976 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

## 4 Symbols, units and abbreviated terms

### 4.1 Quantities

| Symbol | Meaning                                                                          | Unit                            |
|--------|----------------------------------------------------------------------------------|---------------------------------|
| $a$    | atomic index for carbon in the generalized molecular species $C_aH_bN_cO_dS_e$   | —                               |
| $b$    | atomic index for hydrogen in the generalized molecular species $C_aH_bN_cO_dS_e$ | —                               |
| $c$    | atomic index for nitrogen in the generalized molecular species $C_aH_bN_cO_dS_e$ | —                               |
| $d$    | atomic index for oxygen in the generalized molecular species $C_aH_bN_cO_dS_e$   | —                               |
| $e$    | atomic index for sulfur in the generalized molecular species $C_aH_bN_cO_dS_e$   | —                               |
| $g$    | coefficients in equation for $B$                                                 | —                               |
| $h$    | molar enthalpy                                                                   | $\text{kJ}\cdot\text{mol}^{-1}$ |
| $k$    | coverage factor                                                                  | —                               |
| $m$    | number of sets of values                                                         | —                               |
| $n$    | number of determinations in a set of values                                      | —                               |
| $p$    | pressure (absolute)                                                              | kPa                             |
| $q$    | exact input quantity in calculation of $Y$                                       | (varies)                        |
| $r$    | correlation coefficient                                                          | —                               |
| $s$    | summation factor                                                                 | —                               |
| $t$    | Celsius temperature                                                              | $^{\circ}\text{C}$              |
| $u(Y)$ | standard uncertainty of $Y$                                                      | (varies)                        |

| Symbol        | Meaning                                                         | Unit                                              |
|---------------|-----------------------------------------------------------------|---------------------------------------------------|
| $u(Y, Y')$    | covariance of $Y$ and $Y'$                                      | (varies)                                          |
| $w$           | repeatability or reproducibility                                | (varies)                                          |
| $x$           | mole fraction                                                   | —                                                 |
| $y$           | inexact input quantity in calculation of $Y$                    | (varies)                                          |
| $A$           | atomic mass (atomic weight)                                     | $\text{kg}\cdot\text{kmol}^{-1}$                  |
| $B$           | second virial coefficient                                       | $\text{m}^3\cdot\text{mol}^{-1}$                  |
| $C$           | third virial coefficient                                        | $\text{m}^6\cdot\text{mol}^{-2}$                  |
| $C_p$         | molar isobaric heat capacity                                    | $\text{kJ}\cdot\text{mol}^{-1}\cdot\text{K}^{-1}$ |
| $D$           | (mass) density                                                  | $\text{kg}\cdot\text{m}^{-3}$                     |
| $\bar{D}$     | molar density                                                   | $\text{mol}\cdot\text{m}^{-3}$                    |
| $E$           | non-random (systematic) bias from the true value of $H_c$       | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $F$           | function that generates property $Y$                            | —                                                 |
| $G$           | relative density                                                | —                                                 |
| $H_c$         | molar-basis calorific value (negative enthalpy of combustion)   | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $H_f$         | enthalpy of formation                                           | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $H_m$         | mass-basis calorific value                                      | $\text{MJ}\cdot\text{kg}^{-1}$                    |
| $H_v$         | volume-basis calorific value                                    | $\text{MJ}\cdot\text{m}^{-3}$                     |
| $J$           | $j$ -th virial coefficient                                      | $\text{m}^3(j-1)\cdot\text{mol}^{-(j-1)}$         |
| $L$           | molar enthalpy of vaporization of water                         | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $M$           | molar mass (molecular weight)                                   | $\text{kg}\cdot\text{kmol}^{-1}$                  |
| $N$           | number of components in a mixture                               | —                                                 |
|               | number of input values of $y$                                   | —                                                 |
| $Q$           | amount of heat released                                         | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $R$           | molar gas constant                                              | $\text{J}\cdot\text{mol}^{-1}\cdot\text{K}^{-1}$  |
| $S$           | sum of mole fractions (= 1)                                     | —                                                 |
| $T$           | thermodynamic (absolute) temperature                            | K                                                 |
| $U(Y)$        | expanded uncertainty of $Y$                                     | (varies)                                          |
| $V$           | molar volume                                                    | $\text{m}^3\cdot\text{mol}^{-1}$                  |
| $W$           | Wobbe index                                                     | $\text{MJ}\cdot\text{m}^{-3}$                     |
| $Y$           | general (unspecified) physical property                         | (varies)                                          |
| $Z$           | compression factor                                              | —                                                 |
| $\alpha$      | mole fraction of nitrogen in dry combustion air                 | —                                                 |
| $\beta$       | mole fraction of oxygen in dry combustion air                   | —                                                 |
| $\gamma$      | mole fraction of argon in dry combustion air                    | —                                                 |
| $\delta$      | mole fraction of water vapour in humid combustion air           | —                                                 |
| $\varepsilon$ | molar amount of air (including any excess) per mole of reactant | —                                                 |
| $\zeta$       | zero-value parameter having non-zero uncertainty                | —                                                 |
| $\eta$        | unity-value factor having non-zero uncertainty                  | —                                                 |
| $\theta$      | $a + b/4$                                                       | —                                                 |
| $\lambda$     | random contribution of offset from the true value of $H_c$      | $\text{kJ}\cdot\text{mol}^{-1}$                   |
| $\mu$         | dipole moment                                                   | debyes                                            |
| $\nu$         | stoichiometric coefficient                                      | —                                                 |
| $\xi$         | relative humidity                                               | —                                                 |
| $\tau$        | $100\text{ K}/T$                                                | —                                                 |
| $\varphi$     | molar amount of saturated exhaust gases per mole of reactant    | —                                                 |

| Symbol    | Meaning                                                      | Unit |
|-----------|--------------------------------------------------------------|------|
| $\omega$  | acentric factor                                              | —    |
| $A_{1-9}$ | constants in the Aly-Lee $Cp^o$ formulation                  | —    |
| $\Phi$    | function that generates the third term of a virial expansion | —    |

## 4.2 Subscripts

|     |                                                                                        |
|-----|----------------------------------------------------------------------------------------|
| $c$ | at the gas-liquid critical point                                                       |
| $g$ | for the sample gas                                                                     |
| $i$ | serial counter                                                                         |
|     | component identifier                                                                   |
| $j$ | serial counter                                                                         |
|     | component identifier                                                                   |
| $k$ | serial counter                                                                         |
| $m$ | serial counter                                                                         |
| $n$ | serial counter                                                                         |
| $r$ | value made dimensionless (reduced) using values for the gas-liquid critical properties |
| $s$ | at the vapour-liquid saturation point                                                  |
| $w$ | for water vapour                                                                       |
| $G$ | gross/superior (calorific value or Wobbe index)                                        |
| $N$ | net/inferior (calorific value or Wobbe index)                                          |
| air | for air                                                                                |
| 0   | reference (base) value of pressure or temperature                                      |
| 1   | combustion reference state/condition                                                   |
| 2   | metering reference state/condition                                                     |

## 4.3 Superscripts

|     |                         |
|-----|-------------------------|
| $o$ | for the ideal gas state |
| $*$ | pre-normalization value |
| $+$ | modified value          |

## 4.4 Abbreviated terms

|       |                                                                 |
|-------|-----------------------------------------------------------------|
| liq   | liquid                                                          |
| ppm   | parts per million (moles per million moles)                     |
| sat   | saturated with water vapour                                     |
| vap   | vapour                                                          |
| AGA   | American Gas Association (USA)                                  |
| BAM   | Bundesanstalt für Materialforschung und Prüfung (Germany)       |
| BBC   | British Broadcasting Corporation (UK)                           |
| CIAAW | IUPAC Commission on Isotopic Abundances and Atomic Weights      |
| GERG  | Groupe Européen de Recherches Gazières                          |
| GOMB  | Gas and Oil Measurement Branch (UK Department of Energy)        |
| GPA   | Gas Processors Association (USA)                                |
| IAPWS | International Association for the Properties of Water and Steam |
| IGT   | Institute of Gas Technology (USA)                               |
| IUPAC | International Union of Pure and Applied Chemistry               |

|       |                                                                              |
|-------|------------------------------------------------------------------------------|
| NAMAS | National Measurement Accreditation Service (UK)                              |
| NBS   | National Bureau of Standards (U.S. Department of Commerce)                   |
| NIST  | National Institute of Standards and Technology (U.S. Department of Commerce) |
| NPL   | National Physical Laboratory (UK)                                            |
| OFGEM | Office of Gas and Electricity Markets (UK National Regulatory Authority)     |
| PTB   | Physikalische-Technische Bundesanstalt (Germany)                             |
| PVT   | pressure-volume-temperature                                                  |
| SD    | standard deviation                                                           |
| SE    | experimental standard deviation of the mean (standard error)                 |
| SI    | Système Internationale des Unités                                            |
| UKAS  | United Kingdom Accreditation Service (UK)                                    |

## 5 Enthalpy of combustion of the ideal gas and its variation with temperature

### 5.1 Preamble

The most fundamental thermophysical properties required in the calculation of the calorific values of a gas or gas mixture are the ideal-gas (standard) enthalpies of combustion  $(-Hc^o)_j$  of each of its component molecular species at any temperature at which combustion may be deemed to take place, i.e. the combustion reference temperature.

In ISO 6976:2016, 6.1, the user is advised that each of these quantities  $(-Hc^o)_j$ , equal numerically to the corresponding ideal-gas gross (superior) calorific value  $(Hc)_G^o$  of component  $j$  varies, albeit weakly, with the combustion reference temperature. The variation observed is nevertheless significant and cannot be ignored in the kind of high-precision calculations that are made possible by ISO 6976.

The theoretical variation of  $Hc^o$  with temperature is in general mathematically unwieldy and, in consequence, it is not practicable to provide simple formulations that would enable the user to determine  $Hc^o$  at any arbitrary combustion reference temperature. Instead, values of  $(Hc^o)_j$  for each distinct molecular species  $j$  listed in ISO 6976 are given in ISO 6976, Table 3 for each of the commonly used combustion reference temperatures of 298,15 K, 293,15 K, 288,71 K, 288,15 K and 273,15 K (25 °C, 20 °C, 60 °F, 15 °C and 0 °C, respectively).

The first of these temperatures, 298,15 K, is the temperature adopted by the International Union of Pure and Applied Chemistry (IUPAC) as the reference temperature for thermochemistry and, in consequence, critically evaluated values of  $Hc^o(25)$  are readily available in the published scientific literature.

Values of  $Hc^o$  have therefore been carefully selected for each of the chemical species listed in ISO 6976:2016 at this temperature (see 5.2), and used as the basis for the calculation of values for the other temperatures as described below (see 5.3 and 5.4).

### 5.2 Standard enthalpy of combustion at 25 °C


Except for methane, for which a new and specially detailed re-evaluation is given in [Clause 11](#) and for water (changed by a trivially small amount in accordance with the latest IAPWS documentation[3]), the values of  $Hc^o(25)$  listed in ISO 6976:2016, Table 3 are unchanged from those given in ISO 6976:1995. All of these values were, in turn, taken from fully-referenced tabulations in GERG TPC/1[4], the major sources for which were Garvin et al.[5] and tables published by the Thermodynamics Research Center[6].

For those components new to the third edition of ISO 6976, namely n-undecane, n-dodecane, n-tridecane, n-tetradecane and n-pentadecane, values of  $H_c^o(25)$  have been taken without change from [6].

### 5.3 Standard enthalpy of combustion at other temperatures

The values listed in ISO 6976:2016, Table 3 for temperatures other than 25 °C have been derived as follows.

Consider the generalized combustion reaction for the pure, supposedly gaseous, chemical species  $C_aH_bN_cO_dS_e$ , in which the atomic indices  $a$  to  $e$  are small non-negative integers (including zero) whose values define the specific species in question (e.g. for  $a = 1, b = 4, c = d = e = 0$ , the species is  $CH_4$ ), viz.



NOTE In some applications, it might be better to consider any sulfur in the products of combustion to be present as  $H_2SO_4$ , either gaseous or liquid as appropriate but, in the present application, gaseous sulfur dioxide is the likely product.

Suppose that the standard enthalpy of combustion at 25 °C,  $-H_c^o(25)$ , for this reaction is available in authoritative publications (as is indeed the case for all species considered herein). The value of  $H_c^o(t)$  at some other temperature  $t$ , for this same species  $j$ , is then given by

$$[-H_c^o(t)]_j = [-H_c^o(t_0)]_j + \sum_i v_i \times [h_i^o(t_0) - h_i^o(t)] \quad (2)$$

or, equivalently,

$$[-H_c^o(t)]_j = [-H_c^o(t_0)]_j + \sum_i \int_{t_0}^t v_i \times (Cp^o)_i dt \quad (3)$$

where

$t_0$  is equal to 25 °C;

$h_i^o(t)$  is the ideal-gas molar enthalpy of component  $i$ ;

$(Cp^o)_i$  is the ideal-gas isobaric molar heat capacity of component  $i$  (except for product water which is taken as the liquid);

$v_i$  is the stoichiometric coefficient for component  $i$ , being taken as positive for reactants (unity for the “object” species  $j$ ) and negative for products.

The summation is taken over all species  $i$  (including  $j$ ) that appear in the combustion reaction (a maximum of 6 in the most general case).

For convenience, we may set

- $i = 1$  for the combusted species  $j$ , from which it follows that  $v_1 = 1$  for all  $j$ ,
- $i = 2$  for the reactant oxygen, whence  $v_2 = [a + (b/4) - (d/2) + e]$ ,
- $i = 3$  for the product carbon dioxide, whence  $v_3 = -a$ ,
- $i = 4$  for the product water, whence  $v_4 = -b/2$ ,
- $i = 5$  for any product nitrogen, whence  $v_5 = -c/2$ , and
- $i = 6$  for any product sulfur dioxide, whence  $v_6 = -e$ .

Thus, the calculation is reduced to having sufficient knowledge of either  $h^o$  or, equivalently,  $Cp^o$  as a function of temperature, for the “object” species  $j$  and for the 5 “auxiliary” species  $O_2$ ,  $CO_2$ ,  $N_2$  and  $SO_2$  (in the gas phase) and liquid water. Either quantity is a complicated function of temperature, historically often expressed in polynomial form, for all molecular species.

## 5.4 Formulation of the ideal-gas enthalpy

Appropriate data for the enthalpy differences  $[h_i^o(t_0) - h_i^o(t)]$  between specific temperatures, which thus enable direct calculations of  $Hc^o(t)$ , without recourse to polynomial expressions, may be found for several of the present components in the compilations of Armstrong and Jobe<sup>[7]</sup> and (less explicitly) of Garvin et al.<sup>[5][8]</sup> For components not considered in these sources recourse is indeed necessary to polynomial expressions that are available in the research literature.

Several types of polynomial expression have been used over the years to represent the variation of  $h^o$  and  $Cp^o$  with temperature. For the present application, the temperature range over which the variation is needed is rather small (a maximum of 25 K). Partially as a consequence of this, the entire second term on the right-hand side of [Formulae \(2\)](#) and [\(3\)](#) is very small by comparison with the leading term, and any reasonable formulation should produce essentially identical results for  $Hc^o(t)$ . Polynomials of the simple functional form given by Passut and Danner<sup>[9]</sup> (a power series in absolute temperature  $T$ ) or of the somewhat more complex modified Wilhoit-Harmens form<sup>[10][11][12]</sup> are available for a very wide range of molecular species.

For preliminary investigations in ISO 6976:1995, calculations for  $Hc^o(t)$  were, wherever possible, carried out by a variety of routes in order to confirm their equivalence. No significant discrepancies were revealed - that is, differences were generally only to be found at the level of hundredths of  $\text{kJ}\cdot\text{mol}^{-1}$  (the second place of decimal in ISO 6976:2016, Table 3). This level of uncertainty is usually not significant in terms of either measurement accuracy or the required precision of calculation, and the second place of decimal is retained in Table 3 only for interpolative purposes.

Since somewhat before (but not used in) the preparation of the second edition of ISO 6976, a more complex formulation for  $h^o(T)$  and  $Cp^o(T)$  has become available through the publications of Lee et al.<sup>[13][14][15]</sup>, reproduced here for  $Cp^o$  as [Formula \(4\)](#).

$$\frac{Cp^o(T)}{R} = \Lambda_1 + \Lambda_2 \cdot \left( \frac{\Lambda_3 / T}{\sinh(\Lambda_3 / T)} \right)^2 + \Lambda_4 \cdot \left( \frac{\Lambda_5 / T}{\cosh(\Lambda_5 / T)} \right)^2 + \Lambda_6 \cdot \left( \frac{\Lambda_7 / T}{\sinh(\Lambda_7 / T)} \right)^2 + \Lambda_8 \cdot \left( \frac{\Lambda_9 / T}{\cosh(\Lambda_9 / T)} \right)^2 \quad (4)$$

This formulation, involving the use of hyperbolic functions, has gained much popularity and has been applied to many components of natural gas by Jaeschke and Schley<sup>[16]</sup>, who give values of the constants  $\Lambda_{1-9}$  for each of these components. Furthermore, it has been incorporated into the methodology given in ISO 20765-1:2005<sup>[17]</sup> and ISO 20765-2:2015<sup>[18]</sup> for the calculation of thermodynamic properties of natural gas.

For this reason, the Aly-Lee method, as implemented in the commercially available thermophysical properties computer package GasVLe<sup>®1)</sup>, has been used for the purpose of deriving final values of  $Hc^o(20)$ ,  $Hc^o(15,55)$ ,  $Hc^o(15)$  and  $Hc^o(0)$  from  $Hc^o(25)$  to list in ISO 6976:2016, Table 3. In general, the values so derived are unchanged from those listed in ISO 6976:1995, Table 3, but in a few cases there are trivial changes of one or two hundredths of  $\text{kJ}\cdot\text{mol}^{-1}$ .

1) GasVLe<sup>®</sup> is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.

## 5.5 Illustrative examples

Figure 1 is an example, in this case for methane, of how conversion from standard enthalpy of combustion at 25 °C (assumed known) to the corresponding value at 15 °C is carried out. The calculation is performed in accordance with Formula (2) and is presented in Figure 1 in a simple flowsheet-cum-spreadsheet style layout. All the values of  $[h^0(25) - h^0(15)]$  are taken directly from tabulations given in Armstrong and Jobe[7]. No further explanation seems to be necessary.

Another example is given as Figure 2, in this case for hydrogen sulfide, a non-hydrocarbon for which not all of the required data are available in Armstrong and Jobe. This time the conversion is carried out from 25 °C to 0 °C. In this example, of course, the products include sulfur dioxide but no carbon dioxide, and not all of the stoichiometric coefficients are integral. This time the values of  $[h^0(25) - h^0(0)]$  have mostly been calculated using the modified Wilhoit-Harmens formulation[12], as formerly implemented in the computer package GasVLe®.

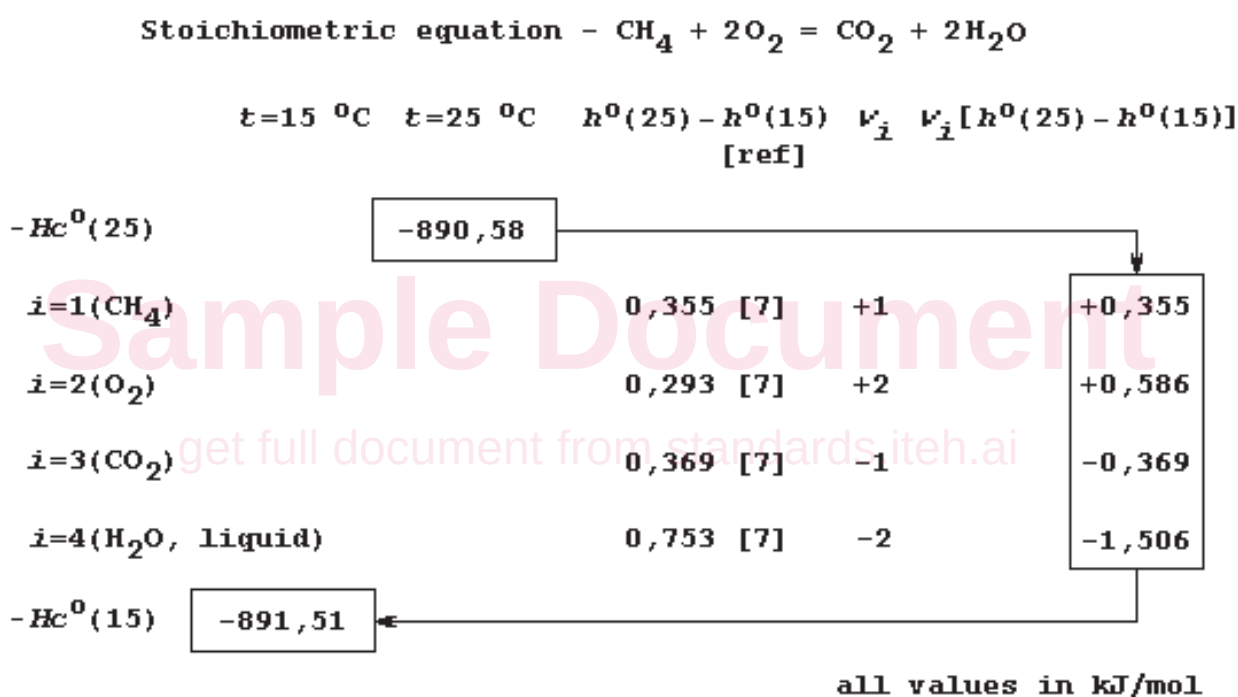


Figure 1 — Conversion of the enthalpy of combustion of the ideal gas from 25 °C to 15 °C — Methane