



SLOVENSKI STANDARD
SIST ISO 15076-1:2026

01-april-2026

Nadomešča:
SIST ISO 15076-1:2011

Upodobitvena tehnologija; barvno upravljanje - Arhitektura, format profila in podatkovna struktura - 1. del: Utemeljeno na osnovi ICC.1:2022

Image technology colour management - Architecture, profile format and data structure - Part 1: Based on ICC.1:2022

Gestion de couleur en technologie d'image - Architecture, format de profil et structure de données - Partie 1: Sur la base de l'ICC.1:2022

get full document from standards.iteh.ai

Ta slovenski standard je istoveten z: ISO 15076-1:2025

ICS:

01.070	Barvno kodiranje	Colour coding
37.100.99	Drugi standardi v zvezi z grafično tehnologijo	Other standards related to graphic technology

SIST ISO 15076-1:2026

en,fr

Sample Document

get full document from standards.iteh.ai



**International
Standard**

ISO 15076-1

**Image technology colour
management — Architecture,
profile format and data structure —**

**Part 1:
Based on ICC.1:2022**

*Gestion de couleur en technologie d'image — Architecture,
format de profil et structure de données —*

Partie 1: Sur la base de l'ICC.1:2022

**Third edition
2025-10**

Sample Document

Get full document from standards.iteh.ai

ISO 15076-1:2025(en)

Sample Document

get full document from standards.iteh.ai



COPYRIGHT PROTECTED DOCUMENT

© ISO 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2025 – All rights reserved

ISO 15076-1:2025(en)

Contents

	Page
Foreword	vii
Introduction	viii
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	2
3.1 Terms and definitions.....	2
3.2 Abbreviated terms.....	6
4 Basic number types	6
4.1 General.....	6
4.2 dateTimeNumber.....	6
4.3 float32Number.....	7
4.4 positionNumber.....	7
4.5 response16Number.....	7
4.6 s15Fixed16Number.....	8
4.7 u16Fixed16Number.....	8
4.8 u1Fixed15Number.....	8
4.9 u8Fixed8Number.....	8
4.10 uint16Number.....	8
4.11 uint32Number.....	8
4.12 uint64Number.....	9
4.13 uint8Number.....	9
4.14 XYZNumber.....	9
4.15 Seven-bit ASCII.....	9
5 Conformance	9
6 Profile connection space, rendering intents and device encoding	9
6.1 General considerations.....	9
6.2 Rendering intents.....	10
6.2.1 General.....	10
6.2.2 Media-relative colorimetric intents.....	10
6.2.3 ICC-absolute colorimetric intent.....	10
6.2.4 Perceptual intent.....	11
6.2.5 Saturation intent.....	11
6.3 Profile connection space.....	11
6.3.1 Chromatic adaptation.....	11
6.3.2 Colorimetric specification.....	11
6.3.3 Reference viewing environment and medium for the perceptual rendering intent.....	13
6.3.4 Colour space encodings for the PCS.....	15
6.4 Converting between PCSXYZ and PCSLAB encodings.....	17
6.5 Device encoding.....	18
7 Profile requirements	18
7.1 General.....	18
7.2 Profile header.....	20
7.2.1 General requirements.....	20
7.2.2 Profile size field (bytes 0 to 3).....	20
7.2.3 Preferred CMM type field (bytes 4 to 7).....	20
7.2.4 Profile version field (bytes 8 to 11).....	21
7.2.5 Profile/device class field (bytes 12 to 15).....	21
7.2.6 Data colour space field (bytes 16 to 20).....	21
7.2.7 PCS field (bytes 20 to 23).....	22
7.2.8 Date and time field (bytes 24 to 35).....	22
7.2.9 Profile file signature field (bytes 36 to 39).....	22
7.2.10 Primary platform field (bytes 40 to 43).....	22

ISO 15076-1:2025(en)

7.2.11	Profile flags field (bytes 44 to 47).....	23
7.2.12	Device manufacturer field (bytes 48 to 51).....	23
7.2.13	Device model field (bytes 52 to 55).....	23
7.2.14	Device attributes field (bytes 56 to 63).....	23
7.2.15	Rendering intent field (bytes 64 to 67).....	23
7.2.16	PCS illuminant field (Bytes 68 to 79).....	24
7.2.17	Profile creator field (bytes 80 to 83).....	24
7.2.18	Profile ID field (bytes 84 to 99).....	24
7.2.19	Reserved field (bytes 100 to 127).....	24
7.3	Tag table.....	24
7.3.1	Overview.....	24
7.3.2	Tag count (byte position 0 to 3).....	25
7.3.3	Tag signature (byte position 4 to 7 and repeating).....	25
7.3.4	Offset to beginning of tag data element (byte position 8 to 11 and repeating).....	25
7.3.5	Tag data element size (byte position 12 to 15 and repeating).....	25
7.4	Tag data.....	26
8	Required tags.....	26
8.1	General.....	26
8.2	Common requirements.....	26
8.3	Input profiles.....	26
8.3.1	General.....	26
8.3.2	N-component LUT-based Input profiles.....	27
8.3.3	Three-component matrix-based Input profiles.....	27
8.3.4	Monochrome Input profiles.....	27
8.4	Display profiles.....	28
8.4.1	General.....	28
8.4.2	N-Component LUT-based Display profiles.....	28
8.4.3	Three-component matrix-based Display profiles.....	28
8.4.4	Monochrome Display profiles.....	28
8.5	Output profiles.....	29
8.5.1	General.....	29
8.5.2	N-component LUT-based Output profiles.....	29
8.5.3	Monochrome Output profiles.....	29
8.6	DeviceLink profile.....	29
8.7	ColorSpace profile.....	30
8.8	Abstract profile.....	30
8.9	NamedColor profile.....	31
8.10	Precedence order of tag usage.....	31
8.10.1	General.....	31
8.10.2	Input, display, output or colour space profile types.....	31
8.10.3	DeviceLink or Abstract profile types.....	31
9	Tag definitions.....	32
9.1	General.....	32
9.2	Tag listing.....	33
9.2.1	AToB0Tag.....	33
9.2.2	AToB1Tag.....	33
9.2.3	AToB2Tag.....	33
9.2.4	blueMatrixColumnTag.....	33
9.2.5	blueTRCTag.....	33
9.2.6	BToA0Tag.....	34
9.2.7	BToA1Tag.....	34
9.2.8	BToA2Tag.....	34
9.2.9	BToD0Tag.....	34
9.2.10	BToD1Tag.....	34
9.2.11	BToD2Tag.....	34
9.2.12	BToD3Tag.....	35
9.2.13	calibrationDateTimeTag.....	35
9.2.14	charTargetTag.....	35

ISO 15076-1:2025(en)

9.2.15	chromaticAdaptationTag	35
9.2.16	chromaticityTag	36
9.2.17	cicpTag	36
9.2.18	colorantOrderTag	36
9.2.19	colorantTableTag	36
9.2.20	colorantTableOutTag	37
9.2.21	colorimetricIntentImageStateTag	37
9.2.22	copyrightTag	39
9.2.23	deviceMfgDescTag	39
9.2.24	deviceModelDescTag	39
9.2.25	DToB0Tag	39
9.2.26	DToB1Tag	39
9.2.27	DToB2Tag	39
9.2.28	DToB3Tag	40
9.2.29	gamutTag	40
9.2.30	grayTRCTag	40
9.2.31	greenMatrixColumnTag	40
9.2.32	greenTRCTag	40
9.2.33	luminanceTag	40
9.2.34	measurementTag	41
9.2.35	metadataTag	41
9.2.36	mediaWhitePointTag	41
9.2.37	namedColor2Tag	41
9.2.38	outputResponseTag	41
9.2.39	perceptualRenderingIntentGamutTag	42
9.2.40	preview0Tag	42
9.2.41	preview1Tag	42
9.2.42	preview2Tag	42
9.2.43	profileDescriptionTag	43
9.2.44	profileSequenceDescTag	43
9.2.45	profileSequenceIdentifierTag	43
9.2.46	redMatrixColumnTag	43
9.2.47	redTRCTag	43
9.2.48	saturationRenderingIntentGamutTag	43
9.2.49	technologyTag	44
9.2.50	viewingCondDescTag	44
9.2.51	viewingConditionsTag	45
10	Tag type definitions	45
10.1	General	45
10.2	chromaticityType	45
10.3	cicpType	46
10.4	colorantOrderType	47
10.5	colorantTableType	48
10.6	curveType	48
10.7	dataType	49
10.8	dateTimeType	49
10.9	dictType	49
10.10	lut16Type	51
10.11	lut8Type	55
10.12	lutAtoBType	57
10.12.1	General	57
10.12.2	“A” curves	58
10.12.3	CLUT	58
10.12.4	“M” curves	59
10.12.5	Matrix	59
10.12.6	“B” curves	59
10.13	lutBtoAType	60
10.13.1	General	60

ISO 15076-1:2025(en)

10.13.2 “B” curves	61
10.13.3 Matrix.....	61
10.13.4 “M” curves	61
10.13.5 CLUT	61
10.13.6 “A” curves.....	62
10.14 measurementType.....	62
10.15 multiLocalizedUnicodeType.....	63
10.16 multiProcessElementsType.....	64
10.16.1 General.....	64
10.16.2 multiProcessElementsType Elements.....	65
10.17 namedColor2Type.....	69
10.18 parametricCurveType.....	71
10.19 profileSequenceDescType.....	71
10.20 profileSequenceIdentifierType.....	72
10.20.1 General.....	72
10.20.2 Profile ID.....	73
10.20.3 Profile Description	73
10.21 responseCurveSet16Type.....	73
10.22 s15Fixed16ArrayType.....	76
10.23 signatureType.....	76
10.24 textType.....	76
10.25 u16Fixed16ArrayType.....	76
10.26 uInt16ArrayType.....	77
10.27 uInt32ArrayType.....	77
10.28 uInt64ArrayType.....	77
10.29 uInt8ArrayType.....	78
10.30 viewingConditionsType.....	78
10.31 XYZType.....	78
Annex A (informative) Data colour encodings and rendering intents.....	79
Annex B (informative) Embedding profiles.....	82
Annex C (informative) Relationship between ICC profiles and PostScript CSAs and CRDs.....	83
Annex D (informative) Profile connection space.....	85
Annex E (informative) Chromatic adaptation tag.....	98
Annex F (normative) Profile computational models.....	101
Annex G (informative) Tables of required tags and tag list.....	103
Annex H (informative) Relationship to iccMAX.....	109
Bibliography.....	110

ISO 15076-1:2025(en)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 130, *Graphic technology*.

This third edition cancels and replaces the second edition (ISO 15076-1:2010), which has been technically revised.

The main changes are as follows:

- `cicpTag` has been added to enable HDR metadata to be carried in the profile;
- `metadataTag` and `dictType` have been added to enable flexible definition of additional metadata;
- it has been clarified that PCSXYZ values can be negative;
- Tag tables are now required to define a contiguous sequence of unique tag elements, with no gaps;
- `parametricCurveType` functions in [Table 69](#) have been corrected;
- informative [Annex B](#) content on embedding profiles has been replaced with a reference to an ICC Technical Note;
- informative [Annex E](#) on chromatic adaptation has been updated;
- the Bibliography and normative references have been updated.

Profiles created in conformance with this document are identified as Version 4.4.0.0 profiles.

A list of all parts in the ISO 15076 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO 15076-1:2025(en)

Introduction

0.1 General

This document specifies the profile format defined by the International Color Consortium[®] (ICC). The intent of this format is to provide a cross-platform profile format for the creation and interpretation of colour data. Such profiles can be used to translate between different colour encodings, and to transform colour data created using one device into another device's native colour encoding. The acceptance of this format by application and operating system vendors allows end users to transparently move profiles, and images with embedded profiles, between different systems. For example, this allows a printer manufacturer to create a single profile for multiple applications and operating systems.

It is assumed that the reader of this document has a good understanding of colour science and imaging, such as familiarity with CIE, ISO and IEC colour standards, general knowledge of device measurement and characterization, and familiarity with at least one operating system level colour management system.

0.2 International Color Consortium

The International Color Consortium was formed with the primary intent of developing and administering a colour profile format standard, and for the registration of the associated tag signatures and descriptions. The founding members of this consortium can be found on the ICC website¹⁾.

0.2.1 ICC profile versions

The initial version of the profile specification developed by the ICC has undergone various revisions, and it was agreed by the ICC that its revision 4.2 first be proposed as an International Standard. It is that revision which formed the basis of the first edition, ISO 15076-1:2005.^[28] The second edition, ISO 15076-1:2010,^[29] was based on ICC revision 4.3, which is fully backward compatible with 4.2. This document is based on ICC.1:2022 (the ICC revision 4.4 of ICC.1), and is fully backward compatible with earlier versions. All the technical specifications contained in the previous edition (ISO 15076-1:2010) are also given in this document, and new specifications exclusive to this document are identified in the Foreword. Informative material has also been updated and clarified.

The ICC specification is widely used and is referred to in other ISO standards. [Table 1](#) is provided to assist users to identify the main technical differences between versions.

1) Available from <https://color.org/iccmembers.xalter>

ISO 15076-1:2025(en)

Table 1 — ICC and ISO versions of the ICC profile specification

ISO version	ICC version	Profile version	Main technical changes relative to previous version
ISO 15076-1:2005	ICC.1:2005	4.2	N/A
ISO 15076-1:2010	ICC.1:2010	4.3	Addition of <ul style="list-style-type: none"> — perceptual intent reference medium colour gamut — new technology signatures — a floating-point device encoding range — a colorimetric intent image state tag — a profile sequence identifier tag Deletion of the mediaBlackPointTag PCSXYZ no longer limited to the PCS illuminant
ISO 15076-1:2024	ICC.1:2024	4.4	Addition of <ul style="list-style-type: none"> — cicpTag to enable HDR metadata to be carried in the profile — metadataTag and dictType added to enable flexible definition of additional metadata Clarified that PCSXYZ values can be negative Tag tables now required to define a contiguous sequence of unique tag elements, with no gaps parametricCurveType functions corrected

The ICC will continue to administer its own version of this document and, if enhancements are made to ICC.1, they will be considered for future revisions of ISO 15076-1. ICC and ISO/TC 130 will work to ensure that there are no significant differences between the ICC and ISO versions of this document.

The ICC web site (www.color.org) provides supplementary information relevant to ISO 15076-1 and ICC.1 and additional resources for developers and users. It also provides information on how to become a member of ICC.

0.3 Colour management architecture and profile connection space

The underlying architecture assumed in this document is based around a reference colour space that is unambiguously defined. The colour specification method selected was that defined by CIE which is internationally accepted. The CIE system enables a set of tristimulus values (CIEXYZ) to be specified for a coloured stimulus. These tristimulus values enable a user to determine whether colours match in appearance when viewed by a typical observer in a specific viewing environment. It follows that it is possible to define the colour appearance of a sample by these tristimulus values (or some defined transformation of them) for a specified state of viewer adaptation. The colour appearance is simply the appearance of the colour to a typical human observer, as opposed to the physical characteristics of the colour stimulus, which is not fully specified using tristimulus values.

Calculation of the CIEXYZ values for transmitting or reflecting media is achieved from the spectral sum-product of the reflectance or transmittance of the sample, the relative spectral power distribution of the illumination source used to view it and the spectral 'sensitivity' of the standard observer. However, as CIE defines two standard observers, two measurement geometries (for reflecting media) and a large number of standard illuminants, it is necessary to restrict these options in order to have a colour specification system that is not ambiguous for a particular application. For this document, the ICC has defined such a restriction, based on ISO 13655, and the resultant colour spaces are known as PCSXYZ and PCSLAB. Furthermore, the simple CIE system (whether CIEXYZ or the CIELAB values derived from them) does not accommodate the effect of surrounding stimuli to the sample being measured (which can be different for various types of media) or the illumination. Both of these affect appearance so the PCS values do not by themselves specify appearance. To overcome this problem, the PCS is used in two different ways. The first accounts only for the assumed state of chromatic adaptation of the viewer, and describes the colorimetry of actual originals and their reproductions, chromatically adapted to the PCS adopted white chromaticity, through the colorimetric

ISO 15076-1:2025(en)


rendering intents. The second, which describes the colorimetry of an image colour rendered to a standard reference medium under a specified viewing condition, is employed for the perceptual rendering intent and optionally for the saturation rendering intent. Thus, it can incorporate corrections for different states of viewer adaptation and other desired rendering effects, as well as accommodating differences between actual colour encoding and device dynamic ranges and colour gamuts, and those of the perceptual intent reference medium. When required, the viewing conditions can be specified to allow colour appearance to be determined for the colorimetric rendering intents.

In summary, the PCS is based on CIEXYZ (or CIELAB) determined for a specific observer (CIE Standard 1931 Colorimetric Observer, often known colloquially as the 2-degree observer), relative to a specific illuminant chromaticity (that of CIE D50), and measured with a specified measurement geometry ($0^\circ:45^\circ$ or $45^\circ:0^\circ$), for reflecting media. Measurement procedures are also defined for transmitting and self-luminous media. Since the conversion from CIEXYZ to CIELAB is quite unambiguous, profile builders can use either colour space for the PCS; the colour management system is able to determine which has been used from a tag in the header.

For colorimetric renderings where the measured data were not obtained relative to a D50 adopted white chromaticity, the profile builder is expected to adapt the data to achieve this. Therefore, a mechanism for identifying the chromatic adaptation used in such situations is provided. For the perceptual rendering intent, the viewing conditions and reference medium are specified in order to provide a clear target for colour rendering and re-rendering (including gamut mapping). In the following paragraphs, the reference colour space, to which reference is made, needs to include the viewing conditions and reference medium when the perceptual intent is being considered. For the perceptual rendering intent, profile builders are expected to undertake any corrections for appearance effects if the viewing conditions used for monitors and transmitting media (such as dark surrounds) differ from those typical for reflecting media, and to account for differences between actual media and the reference medium.

[Figure 1](#) shows how a reference colour space can be used to provide the common interface for transformations between different colour encodings, as used by different devices, or even different operational modes of the same device. Without it, a separate transformation would be required for each pair of device modes. If there are n device modes to be supported in a system, and it is necessary to provide a transformation between each pair of device modes, n^2 transforms would need to be defined and n new transforms would need to be defined every time a new device mode was added. As a new printer device mode can consist simply of a new paper type, this is not a practical solution. By using a reference colour space, only n transforms need be defined and only one new transform needs to be defined each time a new device mode is added; whatever device-to-device transforms are needed can be constructed by linking the source and destination profiles using the reference colour space as the interface.

ISO 15076-1:2025(en)

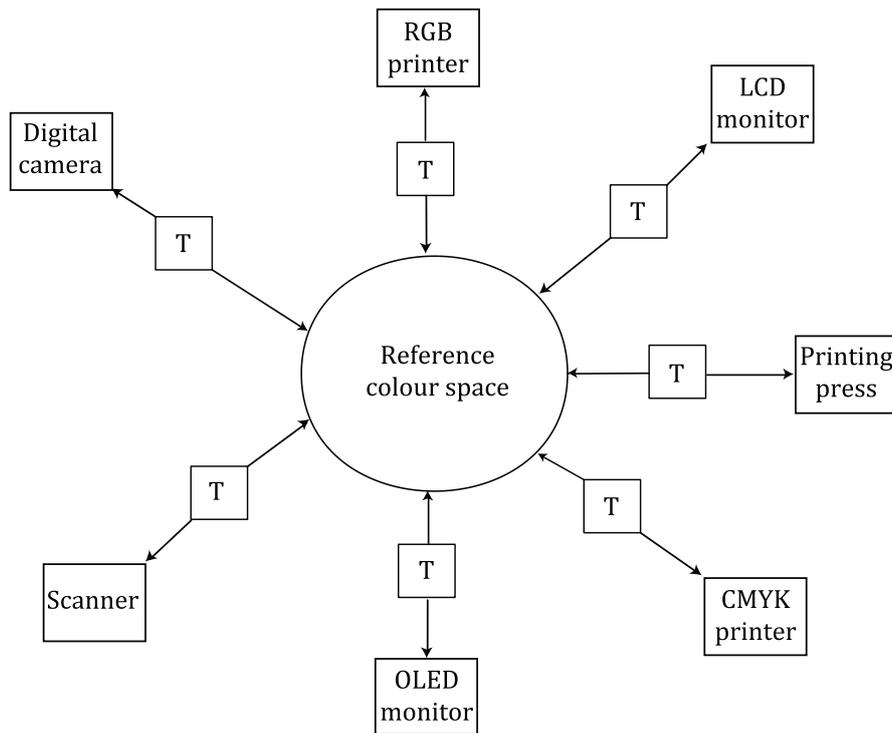**Key**

T colour management transform

Figure 1 — Use of a reference colour space

While images can be encoded directly in PCSXYZ or PCSLAB, this will not generally be the case. A number of colour encodings for open exchange have been standardized to meet a variety of needs. Depending on the use case, different bit depths, image states, reference media and colour gamuts are needed. Devices also have different characteristics resulting in different native encodings. Except for a few cases where default encodings for key system devices are used for exchange (like the sRGB encoding), it is not practical or productive to attempt to restrict system colour encoding support.

For reasons of precision, it is usually desirable to define the transformation between the colour data encoding and the profile connection space (PCS) at a high precision. If the transformation between a colour data encoding and the PCS is provided with an image file, it can be utilized when images are reproduced. In order that the transformation between the colour data encoding and the PCS can be interpreted by all applications it is important that it be defined in an open specification. The profile format defined in this document provides that specification.

0.4 Rendering intents

In general, actual device colour gamuts will fail to match each other, and that of the perceptual intent reference medium, to varying degrees. Because of this mismatch, and because of the needs of different applications, four rendering intents (colour rendering styles) are defined in this document. Each one represents a different colour reproduction objective. The colorimetric rendering intents operate directly on measured colorimetric values, with correction for chromatic adaptation when the measured values were not obtained relative to the PCS adopted white chromaticity. The other rendering intents (perceptual and saturation) operate on colorimetric values which are adjusted in an as-needed fashion to account for any differences between devices, media, and viewing conditions.

Two colorimetric rendering intents are specified in this document, though only one is included fully constructed in the profile. The included media relative colorimetric intent is based on media-relative colorimetry, which is normalized relative to the media white for reflecting, transmitting, and self-luminous media, or, in the case of colour encodings and capture, to the colour encoding values that correspond to the highest perceived brightness. Thus, the media white will have the values of 100, 0, 0 in PCSLAB. This ensures that highlight clipping will not occur when the media-relative colorimetric intent is used. The use

ISO 15076-1:2025(en)

of media-relative colorimetry enables colour reproductions to be defined which maintain highlight detail, while keeping the medium 'white', even when the original and reproduction media differ in colour. However, this rendering intent introduces some change in all colours in the reproduction when the media whites of the source and destination do not match.

The PCS adopted white is defined to be the radiance of a perfect reflecting diffuser illuminated by a source with a spectral power distribution matching that of CIE Illuminant D50. ICC profiles contain the values of the media white, adapted to be relative to the chromaticity of the PCS adopted white. For the ICC-absolute colorimetric rendering intent, all of the colorimetric values are re-calculated to be relative to the tristimulus values of the PCS adopted white. When source and destination viewing conditions are identical and an exact colour match is required for all within-gamut colours (including the source medium colour), it is recommended that the ICC-absolute colorimetric rendering intent is used. This rendering intent can also be useful in other situations.

The colour rendering of the perceptual and saturation rendering intents is vendor specific. The former, which is useful for general reproduction of pictorial images, typically includes tone scale adjustments to map the dynamic range of one medium to that of another, and gamut reshaping and mapping to deal with gamut mismatches. The latter has historically been useful for images which contain objects such as charts or diagrams, and usually involves compromises, such as trading off preservation of hue in order to preserve the vividness of pure colours. As the saturation rendering intent is neither required to contain colorimetric characterization information or to use the perceptual intent reference medium, it is the only option, in proprietary systems, for providing colour rendering and re-rendering transforms to and from custom reference media represented in the PCS. For broader interoperability when using the saturation rendering intent, the perceptual reference medium can be used, and its use indicated.

For perceptual transforms it is necessary, in order to optimize colour rendering, to provide a realistic target for the colour rendering. For this reason, a reference medium and reference viewing condition have been defined which apply only to the perceptual rendering. The reference medium is defined as a hypothetical reflection print on a substrate with a white having a neutral reflectance of 89 %, and a density range of 2,459 3. The reference viewing condition is the P2 condition specified in ISO 3664, i.e. D50 at 500 lx for viewing reflecting media. A neutral surround of 20 % reflectance is assumed. The colour gamut of the reference medium is qualitatively specified as that of a reflection print, and whatever colour gamut is used in the PCS is required to be consistent with the specified dynamic range of the perceptual reference medium. It is recommended that the reference gamut specified in ISO 12640-3 be used as a more explicit target gamut for improved interoperability. It is recommended that profile creators consider this gamut to be the target for perceptual intent colour rendering and re-rendering to the PCS. Likewise, the perceptual intent colour re-rendering from the PCS needs to assume this gamut as the starting gamut for colour re-rendering to the destination medium. However, even when the use of this gamut is indicated, perceptual intent transforms need to be designed to produce the best visual results, and need not conform exactly to this gamut in the PCS.

The choice of a reference medium with a realistic black point for the perceptual intent provides a well-defined aim when colour rendering or re-rendering are required. Inputs with a dynamic range greater than a reflection print (e.g. a slide film image, or the colorimetry of high-range scenes) can have their highlights and shadows smoothly compressed to the range of the reference medium in such a way that these regions can be expanded again without undue loss of detail on output to wide-range media. Likewise, images from original media with limited dynamic range can be colour re-rendered to the expanded dynamic range of the reference medium, in order to produce better quality in subsequent reproductions. Bi-directional transform pairs (e.g. data-to-PCS and PCS-to-data for each rendering intent) in the profiles can be used to undo prior PCS-to-data colour re-rendering so that a differently optimized reproduction can be produced for a different reproduction medium.

Profiles generally offer different transformations for different rendering intents. When the rendering intent is selected the corresponding transformation is selected by the colour management system. The choice of rendering intent is highly dependent upon the intended use. In general, the perceptual rendering intent is most applicable for the colour re-rendering of natural images, to make pleasing and aesthetically similar, but not exactly matching, reproductions on different media. The ICC-absolute colorimetric rendering intent is most appropriate for a proofing environment, where the colour reproduction obtained on one device is simulated on another. The media-relative colorimetric rendering intent is appropriate when mapping of the source medium white to the destination medium white is desired, but a full colour re-rendering is not.


ISO 15076-1:2025(en)

For those requiring further information, an extended discussion of many of the issues described above is provided in [Annex D](#).


0.5 Colour profiles

Colour profiles provide colour management systems with the information necessary to convert colour data between different colour encodings, including device encodings. This document divides colour devices into three broad classifications, i.e. input devices, display devices and output devices. For each device class, a series of base algorithmic models are described which perform the transformation between colour encodings. [Figures 2](#) and [3](#) show examples of these models, which provide different trade-offs in memory footprint, colour quality and performance results. The matrix tone reproduction curve (TRC) model is explained in detail in [8.3.3](#) and [8.4.3](#), the lutAToBType and lutBToAType in [10.10](#) and [10.11](#), and the multiProcessElementsType in [10.14](#). The necessary parameter data to implement these models is described in the appropriate tag type descriptions in [Clause 10](#). This required data provides the information for the colour management framework default colour management module (CMM) to transform colour information between colour encodings. A representative architecture using these components is illustrated in [Figure 4](#).


NOTE Only the models shown in [Figures 2 d\), e\), f\)](#) and [Figures 3 d\), e\) and f\)](#) can be used if the device space has more than three components/colours.

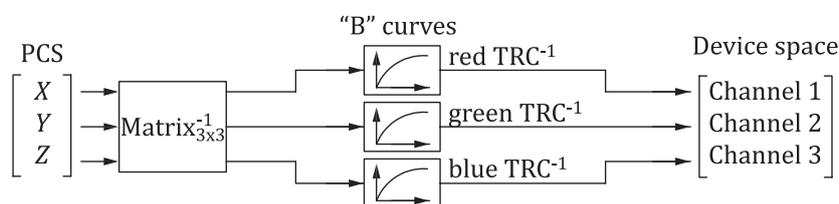


a) Using a matrix/TRC model

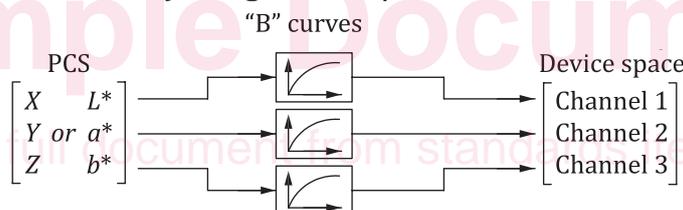

b) Using a lutBToAType model

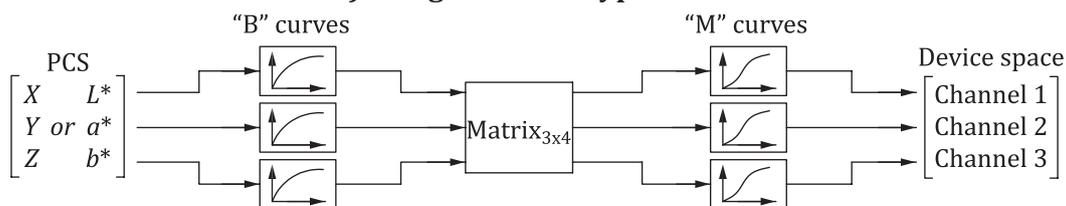

c) Using a lutBToAType model

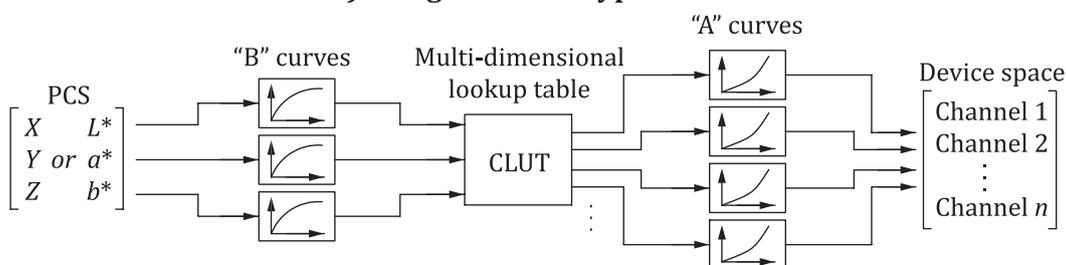

d) Using a lutBToAType model