© IEC 2023

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

_____

IEC 60884-1
Edition 4.0 2022-01

PLUGS AND SOCKET-OUTLETS FOR HOUSEHOLD AND SIMILAR PURPOSES –

Part 1: General requirements

IEC 60884-1
Édition 4.0 2022-01

PRISES DE COURANT POUR USAGES DOMESTIQUES ET ANALOGUES –

Partie 1: Exigences générales

CORRIGENDUM 1

Corrections to the French version appear after the English text.


Les corrections à la version française sont données après le texte anglais.

SIST Preview
(https://ecommerce.sist.si)

Figure 13 – Arrangement for checking damage to conductors

*Replace the dimension "*H ± 1,5*" with "*H ± 15*", as follows:*

IEC 60884-1:2022/COR1:2023
https://ecommerce.sist.si/catalog/standards/iec/c3c5d2a5-e48e-43f5-a334-651721f8b2e9/iec-60884-1-2022-cor1-2023

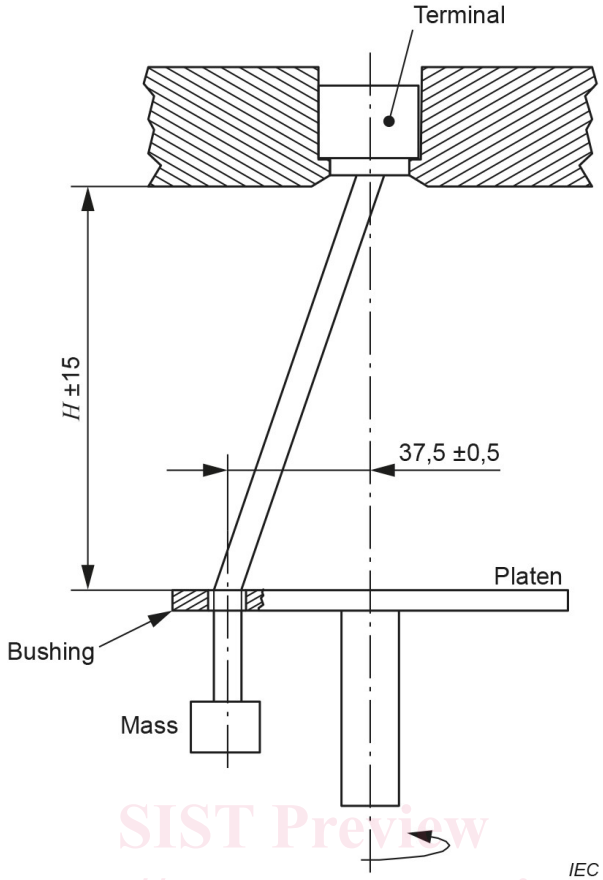

SIST Preview
(https://ecommerce.sist.si)

Figure 13 – Arrangement for checking damage to conductors

IEC 60884-1:2022/COR1:2023
https://ecommerce.sist.si/catalog/standards/sist/e3f5-a334-65172f8b2e9/iec-60884-1-2022-cor1-2023

Table 8 – Relationship between rated current and connectable cross-sectional areas of copper conductors for screwless-type terminals

Replace the text in Table 8, first column, third row with the following:

From 10 up to and including 16

Table 9 – Value for pull test for screwless-type-type terminals

Replace the text in Table 9, first column, second row with the following:

From 10 up to and including 16

Table 12 – Nominal cross-sectional areas of rigid copper conductors for deflection test of screwless-type terminals

Replace the text in Table 12, first column, second row with the following:

From 10 up to and including 16

Figure 19 – Test set-up in accordance with 16.2.3

*Replace in the key the terms "*Spray tube*" with "*Oscillating tube*" and the terms "*Base part*" with "*Base plate*".*

17.3 Electric strength test

Replace the first two paragraphs of 17.3 (including the dashed list) with the following:

A voltage of substantially sine-wave form, having a frequency of 50 Hz or 60 Hz, is applied for 1 min between the parts indicated in 17.2.

The test voltage shall be as follows:

– *1 250 V for accessories having a rated voltage up to and including 130 V;*
– *2 000 V for accessories having a rated voltage exceeding 130 V.*

Accessories with an accessible metal surface according to 10.3.2 shall in addition be tested as follows:

Between the live parts (L1, L2, L3 and N, if any) connected together and the accessible metal surface:

– *2 000 V for accessories having a rated voltage up to and including 130 V;*
– *3 000 V for accessories having a rated voltage exceeding 130 V.*

19.5.1.1 General

Move the first paragraph of 19.5.1.1 after the second paragraph of 19.2.

Table 19 – Maximum and minimum withdrawal force for plugs and socket-outlets

Replace Table 19 with the following:

SIST Preview
(https://ecommerce.sist.si)
IEC 60884-1:2022/COR1:2023
https://ecommerce.sist.si/catalog/standards/iec/c3c5d2a5-e48e-43f5-a334-651721f8b2e9/iec-60884-1-2022-cor1-2023

Table 19 – Maximum and minimum withdrawal force for plugs and socket-outlets

Ratings of the accessory	Number of the poles of the accessory	Withdrawal force N		
		Multi-pin gauge maximum	Single-pin gauge minimum	Single-pin gauge maximum[a]
Up to and including 13 A	2	40	1,5	17
	3	50		
	More than 3	70		
Above 13 A up to and including 20 A	2	50	2,0	25
	3	54		
	More than 3	70		
Above 20 A up to and including 32 A	2	80	3,0	27
	3	80		
	More than 3	100		

[a] These withdrawal forces are only for testing the resilient earthing contact assembly of a plug.

Figure 45 – Impact test apparatus on pins provided with insulating sleeves

*Replace "*Falling weight 1000 ± 2g*" with "*Falling weight 100 ± 1 g*" as follows:*