

ETSI TS 118 123 V2.0.2 (2020-03)



oneM2M; Home Appliances Information Model and Mapping (oneM2M TS-0023 version 2.0.2 Release 2A)

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/b682362-b6ca-4aba-848f-abe2b6a995c4/etsi-ts-118-123-v2.0.2-2020-03>



ReferenceRTS/oneM2M-000023v2A

Keywordsinformation model, IoT, M2M

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2020.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definition of terms, symbols and abbreviations.....	8
3.1 Terms.....	8
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Conventions.....	8
5 Home Appliance Information Model	8
5.1 Introduction	8
5.2 Design Principle of the Home Appliance Information Model.....	8
5.2.1 Basic design principle of information modelling.....	8
5.2.2 Description rules for Module Classes and Device models.....	9
5.3 ModuleClasses	10
5.3.1 alarmSpeaker	10
5.3.2 audioVideoInput	10
5.3.3 audioVolume.....	10
5.3.4 battery	11
5.3.5 binarySwitch.....	11
5.3.6 bioElectricalImpedanceAnalysis.....	12
5.3.7 boiler.....	12
5.3.8 brightness.....	12
5.3.9 clock.....	12
5.3.10 colour.....	13
5.3.11 colourSaturation.....	13
5.3.12 doorStatus	13
5.3.13 electricVehicleConnector.....	13
5.3.14 energyConsumption	14
5.3.15 energyGeneration.....	14
5.3.16 faultDetection	14
5.3.17 height	15
5.3.18 hotWaterSupply	15
5.3.19 keypad.....	15
5.3.20 motionSensor	15
5.3.21 oximeter	16
5.3.22 powerSave.....	16
5.3.23 pushButton.....	16
5.3.24 recorder	16
5.3.25 refrigeration	17
5.3.26 relativeHumidity	17
5.3.27 rinseLevel	17
5.3.28 runMode.....	17
5.3.29 signalStrength	18
5.3.30 smokeSensor.....	18
5.3.31 spinLevel	18
5.3.32 televisionChannel	18
5.3.33 temperature	19
5.3.34 temperatureAlarm	19
5.3.35 timer.....	19
5.3.36 turbo.....	20
5.3.37 waterFlow	21

5.3.38	waterLevel	21
5.3.39	waterSensor.....	21
5.3.40	weight	21
5.3.41	wind	21
5.4	Device models	22
5.4.1	deviceAirConditioner.....	22
5.4.2	deviceClothesWasher.....	22
5.4.3	deviceElectricVehicleCharger	23
5.4.4	deviceLight	23
5.4.5	deviceMicrogeneration	23
5.4.6	deviceOven	24
5.4.7	deviceRefrigerator	24
5.4.8	deviceRobotCleaner.....	24
5.4.9	deviceSmartElectricMeter	24
5.4.10	deviceStorageBattery	25
5.4.11	deviceTelevision.....	25
5.4.12	deviceThermostat.....	25
5.4.13	deviceWaterHeater.....	26
5.5	Enumeration type definitions	26
5.5.1	hd:deviceType.....	26
5.5.2	hd:supportedInputSources	26
5.5.3	hd:liquidLevel.....	27
5.5.4	hd:spinLevelStrength	27
5.5.5	hd:doorState.....	27
5.5.6	hd:tone	27
5.5.7	hd:supportedModes.....	28
5.5.8	hd:alertColourCode.....	28
5.5.9	hd:waterFlowStrength.....	28
5.5.10	hd:windStrength.....	29
5.6	Universal and Common Properties for Device models	29
6	The Principle of Resource Mapping for Home Appliance Information Model.....	30
6.1	Introduction	30
6.2	The Resource Mapping Rules	30
6.2.1	Introduction.....	30
6.2.2	Resource mapping for Device model.....	30
6.2.3	Resource mapping for ModuleClass	31
6.2.4	Resource mapping for Action	31
6.2.5	Resource mapping for Property.....	31
6.2.6	Resource mapping for DataPoint	31
6.3	Short names	32
6.3.1	Introduction.....	32
6.3.2	Resource types	32
6.3.3	Resource attributes for properties and data points	33
6.4	containerDefinition values.....	36
6.4.1	Introduction.....	36
6.4.2	Device models	36
6.4.3	ModuleClasses	36
6.4.4	Actions.....	37
6.5	XSD definitions.....	37
6.5.1	Introduction.....	37
6.5.2	XSD definitions for Device models	37
6.5.3	XSD definitions for ModuleClass.....	38
6.5.4	XSD definitions for Action.....	39
7	Mapping with Other Information Models from External Organizations.....	39
8	Ontology for the Home Appliance Information Model aligned with oneM2M Base Ontology	39
Annex A (informative): Resource Mapping Examples		41
A.1	Introduction	41
A.2	Example for Device model 'deviceAirConditioner'.....	41

A.3 Example of ModuleClass 'binarySwitch'45

A.4 Example of Action 'toggle'46

History47

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/e689e362-b6ca-4aba-848f-abe2b6a995c4/etsi-ts-118-123-v2.0.2-2020-03>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI Partnership Project oneM2M (oneM2M).

ETSI STANDARD REVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/889e362-b6ca-4aba-848f-abe2b6a995c4/etsi-ts-118-123-v2.0.2-2020-03>

1 Scope

The present document describes the oneM2M defined information model for home appliances, including the description of how it is mapped with other information models from external organizations. It also explains the ontology for the home domain information model.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] Home Gateway Initiative Smart Device Template.

NOTE: Available at <https://github.com/Homegateway/SmartDeviceTemplate/tree/7c890b69d9764e341ef1768c5a0e7d53a47cf5c>.

[2] Java™ coding rule.

NOTE: Available at <http://www.oracle.com/technetwork/java/codeconventions-135099.html>.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] oneM2M Drafting Rules.

NOTE: Available at <http://www.onem2m.org/images/files/oneM2M-Drafting-Rules.pdf>.

[i.2] ETSI TR 118 517: "oneM2M; Home Domain Abstract Information Model (oneM2M TR-0017)".

[i.3] ETSI TS 118 101: "oneM2M; Functional Architecture (oneM2M TS-0001)".

[i.4] IEEE 802.15.4™: "IEEE Standard for Local and metropolitan area networks -- Part 15.4: Low-Rate Wireless Personal Area Networks (LR-WPANs)".

[i.5] ETSI TS 118 112: "oneM2M; Base Ontology (oneM2M TS-0012)".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

Device Class ID: URN to identify the Device model definition

ModuleClass ID: URN to identify the ModuleClass model definition

3.2 Symbols

Void.

3.3 Abbreviations

Void.

4 Conventions

The key words "Shall", "Shall not", "May", "Need not", "Should", "Should not" in the present document are to be interpreted as described in the oneM2M Drafting Rules [i.1].

5 Home Appliance Information Model

5.1 Introduction

The present document intends to provide the unified means in the oneM2M system by defining a home appliance information model for the home domain devices such as TV, refrigerator, air conditioner, clothes washer, oven, and robot cleaner. For the reasons of interworking with external technologies and efficiency, the principle of the home appliance information model is designed based on HGI SDT 3.0 [1].

The principle of defining the home appliance information model is introduced in clause 5.2. ModuleClasses which oneM2M systems support are explained in clause 5.3. In the subsequent clause 5.4, Device models are defined.

5.2 Design Principle of the Home Appliance Information Model

5.2.1 Basic design principle of information modelling

The design principle of the oneM2M abstract information model of home appliance, is to use SDT 3.0 as introduced in ETSI TR 118 517 [i.2]. Note that those terms starting with a capital letter in this clause are SDT terms and are explained in [1].

Domain is a unique name which acts like a namespace (e.g. "org.oneM2M.home.modules"). It is set by the organization creating the SDT, allowing reference to a package of definitions for the contained ModuleClasses and Device models.

ModuleClasses specifies a single service (e.g. audioVolume, powerOn/Off) with one or more Actions, Properties, DataPoints and Events. Each service which is described as a ModuleClass can be re-used in many Devices.

Device model is a physical, addressable, identifiable appliance, sensor and actuator with one or more Modules, Properties and SubDevices.

SubDevice is a device which may be embedded in a Device and/or is addressed via another Device.

Module is an instantiation of a ModuleClass for a specific Device or SubDevice.

Figure 5.2.1-1 depicts the basic structure of SDT 3.0 [i.2].

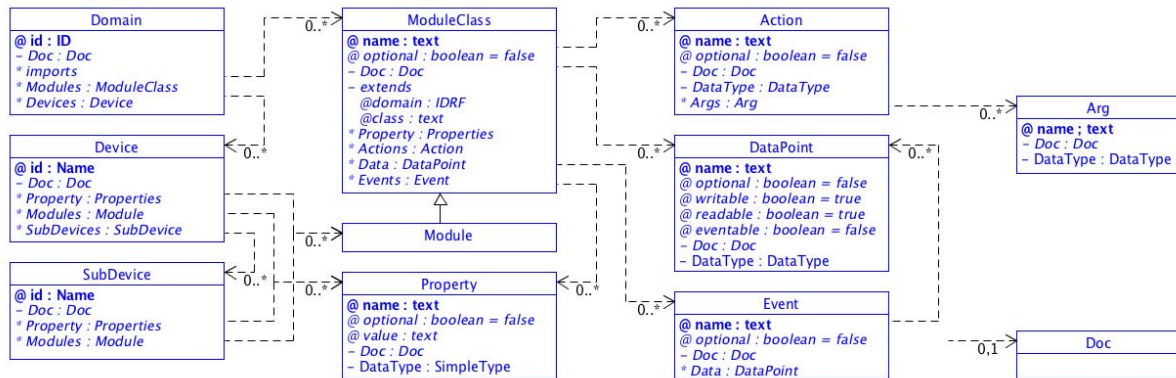


Figure 5.2.1-1: Design Structure of the Home Appliance Information Model using SDT 3.0

5.2.2 Description rules for Module Classes and Device models

When the Home Appliances Information Model is described based on SDT, the following rules shall be applied:

- Rule 1: CamelCase rule:
 - When naming each element, lowerCamelCase shall be used as the Java coding rules [2].
- Rule 2: Rule for description of Action, DataPoint.
 - DataPoint shall be used to represent stateless operations. (e.g. powerState of binarySwitch for on/off operations).
 - Action shall be used when describing stateful condition, handling unknown internal state conditions (e.g. upVolume/downVolume by increasing/decreasing the audioVolume in steps, handling transactional procedures, or checking integrity using username plus password at the same time).
- Rule 3: Rule for description of DataPoint and Property:
 - Non-functional information shall be described as a Property. Functional information shall be described as a DataPoint. (E.g. non-functional information: version, id; functional information: targetTemperature, targetVolume).
- Rule 4: Definition of the Domain:
 - The Domain, in the case of the Home Appliance Information Model, is specified as "org.onem2m.home".
 - The sub-domain for Device and ModuleClass shall be specified as "org.onem2m.home.devices" and "org.onem2m.home.moduleclasses" respectively.
- Rule 5: Naming rule for the element:
 - the name of each element should be concise and avoid repeating its parent element name; but
 - it may include the name of its parent element for readability (e.g. lightDimmerUp, lightDimmerDown under lightDimmer).
- Rule 6: Criteria for marking elements as optional or mandatory:
 - An element shall only be defined as mandatory if it is foreseen to be universally mandatory to all implementing technologies.

- Rule 7: Enumeration type:
 - When describing the meaning of values for enumeration type elements, they may be described in another clause.

The enumeration types for Home Appliance Information Model are based on <xs:integer>, and the numeric values are interpreted as specified in clause 5.5.

5.3 ModuleClasses

5.3.1 alarmSpeaker

This ModuleClass provides the capability to initiate an alarm.

Table 5.3.1-1: DataPoints of alarmSpeaker ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
tone	hd:tone	true	true	true	Representing the tones of the alarm.
light	hd: alertColour Code	true	true	true	Representing the lighting mode of the alarm.
alarmStatus	xs:boolean	true	true	false	"True" indicates the alarm start while "False" indicates the alarm stop.

5.3.2 audioVideoInput

This ModuleClass provides capabilities to control and monitor audio video input source of device such as TV or SetTopBox.

Table 5.3.2-1: DataPoints of audioVideoInput ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
inputSourceID	xs:integer	true	true	false	Activated input source ID in the supported input source list, supportedInputSources.
supportedInputSources	list of hd:supportedInput Source	true	false	false	List of supported input sources for the given device (see clause 5.5.2).

5.3.3 audioVolume

This ModuleClass provides capabilities to control and monitor volume

Table 5.3.3-1: Actions of audioVolume

Return Type	Name	Argument	Optional	Documentation
none	upVolume	none	true	Increase volume by the amount of the stepValue up to the maxValue.
none	downVolume	none	true	Decrease volume by the amount of the stepValue down to 0.

Table 5.3.3-2: DataPoints of audioVolume

Name	Type	Readable	Writable	Optional	Documentation
volumePercentage	xs:integer	true	true	false	The rounded percentage of the current volume in the range of [0, maxValue]. 0 percentage shall mean no sound produced.
stepValue	xs:integer	true	false	true	Step value used by UpVolume and DownVolume Actions.
maxValue	xs:integer	true	false	true	Maximum value allowed for Volume.
muteEnabled	xs:boolean	true	true	false	The current status of the mute enablement. "True" indicates enabled, and "False" indicates not enabled.

5.3.4 battery

Battery indicates the detection of low battery and gives an alarm if triggering criterion is met. The charge value in the module shows the current battery charge level.

Table 5.3.4-1: DataPoints of battery ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
level	xs:integer	true	false	false	The rounded percentage of the current level of battery in the range of [0, 100]. 0 percentage shall mean no battery remained.
capacity	xs:integer	true	false	true	The total capacity of battery in mAh.
charging	xs:boolean	true	false	true	The status of charging. "True" indicates enabled, and "False" indicates not enabled.
discharging	xs:boolean	true	false	true	The status of discharging. "True" indicates enabled, and "False" indicates not enabled.
lowBattery	xs:boolean	true	false	true	To indicate that the battery is in low charge level.
batteryThreshold	xs:integer	true	true	true	When the battery level is less than batteryThreshold then the lowBattery is true (and optionally to generate an alarm, see clause 5.3.1).

Table 5.3.4-2: Properties of battery ModuleClass

Name	Type	Value	Optional	Documentation
propElectricEnergy	xs:integer		true	Rated electric energy.
propVoltage	xs:integer		true	Rated voltage.
propMaterial	xs:string		true	The material (e.g. lithium ion, nickel and lead) of the cell.

5.3.5 binarySwitch

This ModuleClass provides capabilities to control and monitor the state of power.

Table 5.3.5-1: Actions of binarySwitch ModuleClass

Return Type	Name	Argument	Optional	Documentation
none	toggle	none	true	Toggle the switch.

Table 5.3.5-2: DataPoints of binarySwitch ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
powerState	xs:boolean	true	true	false	The current status of the binarySwitch. "True" indicates turned-on, and "False" indicates turned-off.

5.3.6 bioElectricalImpedanceAnalysis

This ModuleClass provides the analysis of human body tissue based on impedance measurement.

Table 5.3.6-1: DataPoints of bioElectricalImpedanceAnalysis ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
water	xs:float	true	false	false	The water content measurement from the BIA; the common unit is percentage.
fat	xs:float	true	false	false	The fat content measurement from the BIA; the common unit is percentage.
muscle	xs:float	true	false	false	The muscle content measurement from the BIA; the common unit is percentage.
bone	xs:float	true	false	false	The bone content measurement from the BIA; the common unit is percentage.
visceraFat	xs:float	true	false	false	The viscera fat content measurement from the BIA; the common unit is percentage.
kcal	xs:float	true	false	false	The kcal (kilocalories) measurement from the BIA.
resistance	xs:float	true	false	false	The resistance of human body; the common unit is ohm.

5.3.7 boiler

This ModuleClass provides the status of boiling function for water heaters.

Table 5.3.7-1: DataPoints of boiler ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
status	xs:boolean	true	true	false	The status of boiling.

5.3.8 brightness

This ModuleClass describes the brightness of a light e.g. from a lamp. Brightness is scaled as a percentage. A lamp or a monitor can be adjusted to a level of light between very dim (0 % is the minimum brightness) and very bright (100 % is the maximum brightness).

Table 5.3.8-1: DataPoints of brightness ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
brightness	xs:integer	true	true	false	The status of brightness level in percentage.

5.3.9 clock

This ModuleClass provides the information about current date and time.

Table 5.3.9-1: DataPoints of clock ModuleClass

Name	Type	Readable	Writable	Optional	Documentation
currentTime	xs:time	true	true	false	Information of the current time
currentDate	xs:date	true	true	false	Information of the current date