

INTERNATIONAL STANDARD



**Internet of Things (IoT) – Interoperability for IoT systems –
Part 3: Semantic interoperability**

(standards.iteh.ai)

ISO/IEC 21823-3:2021

<https://standards.iteh.ai/catalog/standards/sist/ceda0c85-f05f-4df9-92eb-0698f6e4cb2b/iso-iec-21823-3-2021>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

iTeh STANDARD PREVIEW
(standards.itih.ai)
<https://standards.itih.ai/catalog/standards/sist/ceda0c85-f05f-4df9-92eb-0698f6e4cb2b/iso-iec-21823-3-2021>



ISO/IEC 21823-3

Edition 1.0 2021-09

INTERNATIONAL STANDARD



Internet of Things (IoT) – Interoperability for IoT systems –
Part 3: Semantic interoperability

ITeH STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/ceda0c85-f05f-4df9-92eb-0698f6e4cb2b/iso-iec-21823-3-2021>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.020; 35.110

ISBN 978-2-8322-1019-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	5
1 Scope.....	8
2 Normative references	8
3 Terms and definitions	8
4 Abbreviated terms	9
5 IoT semantic interoperability process.....	9
5.1 Overview.....	9
5.2 IoT semantic interoperability process requirements.....	10
5.3 IoT semantic interoperability models	11
5.4 IoT semantic interoperability guidelines	13
5.4.1 Guidelines on the capture of semantic meaning	13
5.4.2 Guidelines on the integration of semantic interoperability capability.....	14
5.4.3 Guidelines on the support of semantic interoperability engineering	15
6 IoT semantic interoperability life cycle	19
6.1 Life cycle requirements	19
6.2 Life cycle model.....	22
6.3 Life cycle implementation guidelines	23
6.3.1 Guidelines on ontology life cycle.....	23
6.3.2 Guidelines on semantic interoperability life cycle	23
6.3.3 Guidelines on IoT system life cycle.....	24
Annex A (informative) Guidance on how to learn IoT semantic interoperability	26
Annex B (informative) Guidance on how to develop IoT semantic interoperability.....	29
B.1 Developing semantic interoperability capabilities	29
B.2 Building steps	29
Annex C (informative) Guidance on how to manage IoT semantic interoperability life cycle.....	31
C.1 Interoperability specification life cycle that supports ontologies.....	31
C.2 IoT system life cycle supporting interoperability	32
Annex D (informative) Ontological specification of the IoT Reference Architecture	33
D.1 General.....	33
D.2 Service, network, IoT device and IoT gateway	33
D.3 IoT-User	34
D.4 Virtual entity, physical entity and IoT device.....	35
D.5 Domain-based Reference Model (RM).....	35
Annex E (informative) Related existing ontologies	37
E.1 W3C Semantic Sensor Network ontology	37
E.2 IoT-Lite	37
E.3 Open Connectivity Foundation (OCF) ontology	37
E.4 ETSI Smart Applications REference ontology.....	41
E.5 oneM2M Base Ontology	42
E.6 Sensor Model Language (SensorML)	42
E.7 IoT-O	43
E.8 IoT ontology unification approach	43
Bibliography.....	45

Figure 1 – Semantic interoperability facet for IoT	5
Figure 2 – Using metadata in semantic interoperability	6
Figure 3 – Meaningfulness of the data, described with metadata.....	6
Figure 4 – Objective of semantic interoperability standard	9
Figure 5 – IoT semantic interoperability process model.....	11
Figure 6 – Semantic information usage model.....	12
Figure 7 – Example of structured knowledge representation	13
Figure 8 – Example of semantic information usage for a temperature sensor	15
Figure 9 – Example of ontology mapping	17
Figure 10 – Example of ontology alignment.....	18
Figure 11 – Example of ontology merging	18
Figure 12 – Example of ontology integration	19
Figure 13 – Example of modular design	22
Figure 14 – Example of interoperability maturity evaluation result	22
Figure 15 – Semantic interoperability life cycle model	23
Figure 16 – Example of ontology life cycle model.....	23
Figure 17 – Example of interoperability specification life cycle	24
Figure D.1 – IoT entity	33
Figure D.2 – Service, network, IoT device and IoT gateway	34
Figure D.3 – IoT-User	34
Figure D.4 – Virtual entity, physical entity, and IoT device	35
Figure D.5 – Domain-based Reference Model	36
Figure E.1 – Architecture – concepts	38
Figure E.2 – Communication layering model	38
Figure E.3 – oneloTa	39
Figure E.4 – OCF ontology	40
Figure E.5 – SAREF and its extensions	41
Figure E.6 – Overview of the SAREF ontology	42
Table 1 – IoT semantic interoperability process requirements	10
Table 2 – Llife cycle requirements.....	20
Table A.1 – Syllabus example on IoT semantic interoperability practice	26
Table A.2 – Course content for semantic interoperability practice	27
Table B.1 – Building steps for IoT semantic interoperability	30
Table C.1 – Example of interoperability specification life cycle.....	31
Table C.2 – Example of IoT system life cycle	32

INTERNET OF THINGS (IoT) – INTEROPERABILITY FOR IoT SYSTEMS –

Part 3: Semantic interoperability

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
- 3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this document.
- 7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
- 8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC document may be the subject of patent rights. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 21823-3 has been prepared by subcommittee 41: Internet of Things and related technologies, of ISO/IEC joint technical committee 1: Information technology. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
JTC1-SC41/233/FDIS	JTC1-SC41/244/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, available at: www.iec.ch/members_experts/refdocs and www.iso.org/directives.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The use of the Internet of Things (IoT) is increasing every year, in application areas such as manufacturing, healthcare, and new cross-domain applications related to smart cities (e.g. water, energy, transport, or health). Most IoT systems want to share information, which can be done by interoperability. Mechanisms are therefore needed on how to exchange information and use associated data and data description.

IoT interoperability is described as a successful interaction among entities specified in ISO/IEC 30141 [1]¹, for instance between IoT services provided by different IoT service providers. It can be achieved using the interoperability facet model defined in ISO/IEC 21823-1, which defines five facets: transport, syntactic, semantic, behavioural and policy interoperability.

IoT semantic interoperability is the facet which enables the exchange of data between IoT systems using understood data information models (or semantic meanings). According to a recently published white paper [2]:

"Semantic interoperability is achieved when interacting systems attribute the same meaning to an exchanged piece of data, ensuring consistency of the data across systems regardless of individual data format. This consistency of meaning can be derived from pre-existing standards or agreements on the format and meaning of data or it can be derived in a dynamic way using shared vocabularies either in a schema form and/or in an ontology-driven approach."

As shown in Figure 1,

- semantic interoperability means that information in different data information models can be translated into understandable meaning and exchanged between applications;
- semantic interoperability provides the capability for applications to understand exchanged information;
- semantic interoperability for IoT is achieved by invoking services, and by using specific knowledge and concepts of IoT.

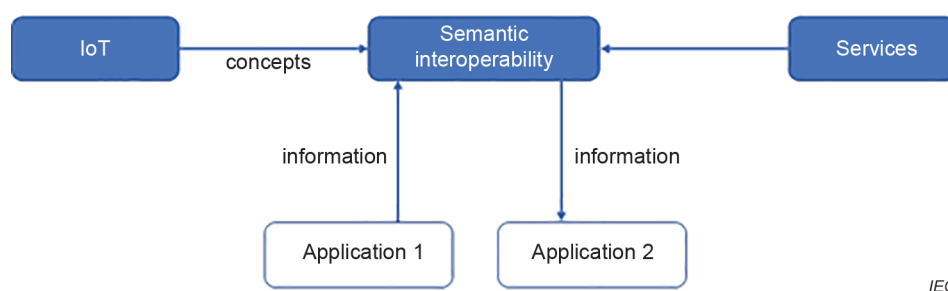


Figure 1 – Semantic interoperability facet for IoT

Semantic interoperability is achieved through the use of metadata, or descriptions of data. The approach of providing data and descriptions has been widely used in IT systems. Two examples are:

- conceptual schemas have been used to describe database content;
- record layouts have been used to display the content of a database record.

As shown in Figure 2, many services invoked by semantic interoperability involve metadata, thus enabling their discovery, understanding and (re)usability.

¹ Numbers in square brackets refer to the Bibliography.

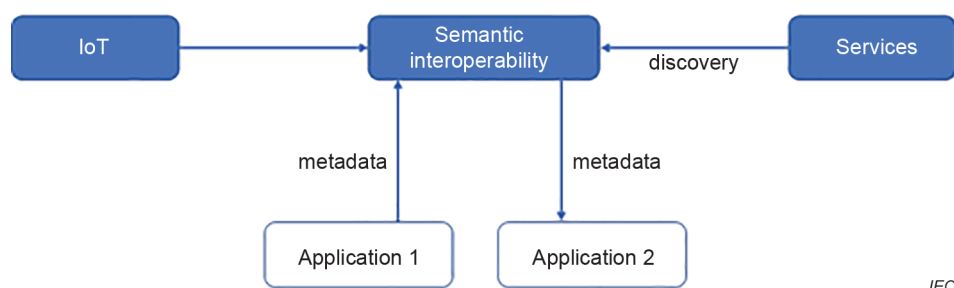


Figure 2 – Using metadata in semantic interoperability

Metadata provides IoT systems with a common understanding of exchanged data. Figure 3 shows how the meaning of data is defined by the metadata to a specific room temperature (left column) and how it is described with metadata (right column).

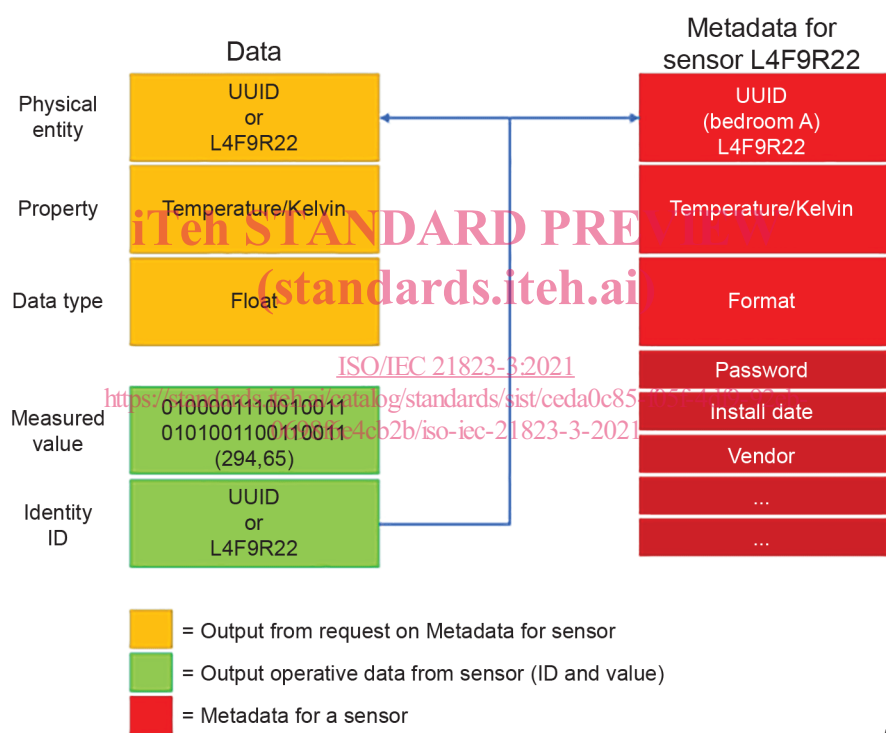


Figure 3 – Meaningfulness of the data, described with metadata

Knowledge that metadata represents can be described using ontologies. In other words, semantic interoperability needs shared, unambiguous, machine-understandable metadata, to be able to perform exchange of information using metadata. The application of semantics in IoT has still been limited because most metadata are developed independently, making it difficult for IoT entities or applications to interoperate semantically. In this document, an ontology-driven approach for semantic interoperability is specified to design and specify metadata, so that the sensors, devices, systems and services can express metadata information and data by applying the ontologies to achieve semantic interoperability. Stakeholders targeted by this document include ontology engineers and IoT system engineers who are building semantic interoperability capabilities for IoT systems.

This document also specifies methods and techniques to build semantic interoperability for IoT systems. Clause 5 focuses on the IoT semantic interoperability process. Clause 6 focuses on the IoT semantic interoperability life cycle management.

Informative annexes provide additional information and guidance. Annex A, Annex B and Annex C provide guidance on how to learn IoT semantic interoperability, develop IoT semantic interoperability, and manage IoT semantic interoperability life cycle, respectively. Annex D provides ontological specification of the IoT Reference Architecture specified in ISO/IEC 30141 [1]. Annex E provides related existing ontologies that are applicable for IoT semantic interoperability.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 21823-3:2021](https://standards.iteh.ai/catalog/standards/sist/ceda0c85-f05f-4df9-92eb-0698f6e4cb2b/iso-iec-21823-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/ceda0c85-f05f-4df9-92eb-0698f6e4cb2b/iso-iec-21823-3-2021>

INTERNET OF THINGS (IoT) – INTEROPERABILITY FOR IoT SYSTEMS –

Part 3: Semantic interoperability

1 Scope

This document provides the basic concepts for IoT systems semantic interoperability, as described in the facet model of ISO/IEC 21823 -1, including:

- requirements of the core ontologies for semantic interoperability;
- best practices and guidance on how to use ontologies and to develop domain-specific applications, including the need to allow for extensibility and connection to external ontologies;
- cross-domain specification and formalization of ontologies to provide harmonized utilization of existing ontologies;
- relevant IoT ontologies along with comparative study of the characteristics and approaches in terms of modularity, extensibility, reusability, scalability, interoperability with upper ontologies, and so on;
- use cases and service scenarios that exhibit necessities and requirements of semantic interoperability.

2 Normative references

ISO/IEC 21823-3:2021

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 20924, *Internet of Things (IoT) – Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 20924 and the following apply. ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

semantic interoperability

interoperability so that the meaning of the data model within the context of a subject area is understood by the participating systems

[SOURCE: ISO/IEC 19941:2017, 3.1.5, modified – In the term, "data" has been deleted.]

3.2

metadata

data that defines and describes other data

[SOURCE: ISO/IEC 11179-3:2013, 3.2.74]

3.3

ontology

specification of concrete or abstract things, and the relationships among them, in a prescribed domain of knowledge

Note 1 to entry: The specification should be computer processable.

[SOURCE: ISO/IEC 19763-3:2020, 3.1.1.1]

4 Abbreviated terms

ICT information and communication technology

IoT Internet of Things

PKI public key infrastructure


5 IoT semantic interoperability process

5.1 Overview

IoT semantic interoperability enables the exchange of data between IoT systems using understood data information models (or semantic meanings). Such models are based on ontologies, which are processable specifications of concepts and relations concerning IoT systems. The benefit of IoT semantic interoperability is to contribute to meet interoperability, reusability, scalability or trustworthiness properties. IoT semantic interoperability has the following stakeholders and concerns:

- ontology engineers, who focus on ontology development in a concern;
- IoT system engineers, who focus on IoT system development and integration of semantic interoperability capabilities in a concern.

As shown in Figure 4, this document provides ontology engineers and IoT system engineers with requirements and specification of methods to prepare and build semantic interoperability.

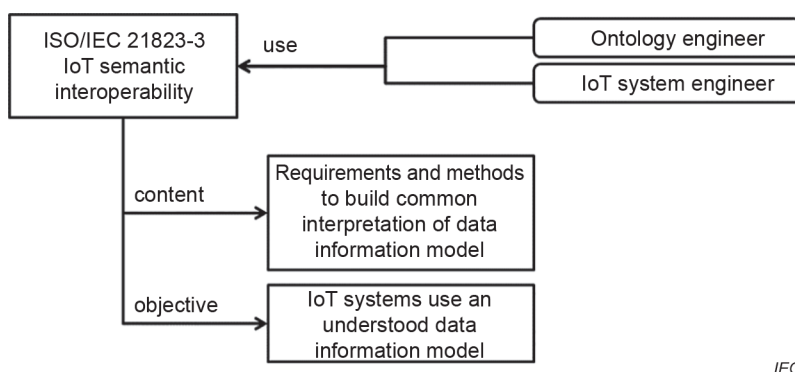

IEC

Figure 4 – Objective of semantic interoperability standard

Two types of requirements are identified:

- IoT semantic interoperability requirements, which focus on how to create data information models, how to develop and integrate interpretation capability in IoT systems;
- life cycle requirements, which focus on the management of data information model perimeters, of data information model design, and of data information model maintenance.

5.2 IoT semantic interoperability process requirements

The following processes shall be carried out by IoT system engineers and ontology engineers:

- data information model creation;
- semantic interoperability capability integration;
- semantic interoperability engineering support.

Table 1 provides for each process a list of requirements with a rationale and a resulting work product that can be used as evidence for conformance.

Table 1 – IoT semantic interoperability process requirements

Processes	Requirements	Rationale	Resulting work product
Data information model creation	Capture common knowledge using common ontologies	IoT systems rely on common architecture, capabilities and communication means, e.g. IoT sensors, actuators, gateways, devices.	Data information model based on the gathered and documented common knowledge on the IoT system
	Capture domain-specific knowledge using domain ontologies	IoT systems can focus on specific domains such as transport, energy, health.	Domain specific data information model on the IoT system
	Capture cross-domain knowledge using cross-domain ontologies	IoT systems can cover cross-domains. For instance, an electric-mobility IoT system belongs to the transport and the energy domain.	Cross-domain specific data information model on the IoT system
Semantic interoperability capability integration	Develop an IoT system capability to exchange information about IoT device interoperability	IoT systems can use various interoperability parameters including technical parameters (e.g. drivers, protocols) and semantic parameters (e.g. application capabilities). Exchange of such parameters can take place using metadata prior to device nominal operation. Metadata can be exposed in the form of schema or subschema or by OWL/XML or JSON-LD. The exchange can involve a proxy when an IoT device cannot provide the capability directly.	IoT system capability to exchange information on IoT device interoperability
	Develop an IoT system capability to negotiate interoperability profiles	IoT systems can use multiple knowledge representations. Agreement is needed on the representation to be used for information exchange. Negotiation is needed to agree on the level of semantic knowledge that is at stake, e.g. using representations of parameters and agreeing on interoperability profiles. The negotiation can involve a proxy when an IoT device cannot provide the capability directly.	IoT system capability to negotiate interoperability profiles
	Validate and integrate the various capabilities to enable IoT device interoperability	IoT systems integrate multiple technologies to enable interoperability (e.g. drivers, protocols, middleware) corresponding to different interoperability facets. They also integrate multiple operations (e.g. discovery, negotiation) to enable interoperability.	IoT device providing overall interoperability capability
Semantic interoperability engineering support	Provide and apply tools to achieve semantic interoperability	Engineers need supporting tools such as ontology discovery and selection, mapping, alignment, merging and integration.	Selection of tools to achieve semantic interoperability

5.3 IoT semantic interoperability models

IoT semantic interoperability can be described with two models: a process model and a usage model. The process model focuses on how semantic interoperability capability is created. The usage model focuses on how semantic information is used and exchanged.

Figure 5 provides the process model for IoT semantic interoperability. It is based on the assumption that interoperability knowledge is made available in processable forms such as the knowledge graph, constructed through ontologies. The entities in Figure 5 will be further described in 5.4.1.

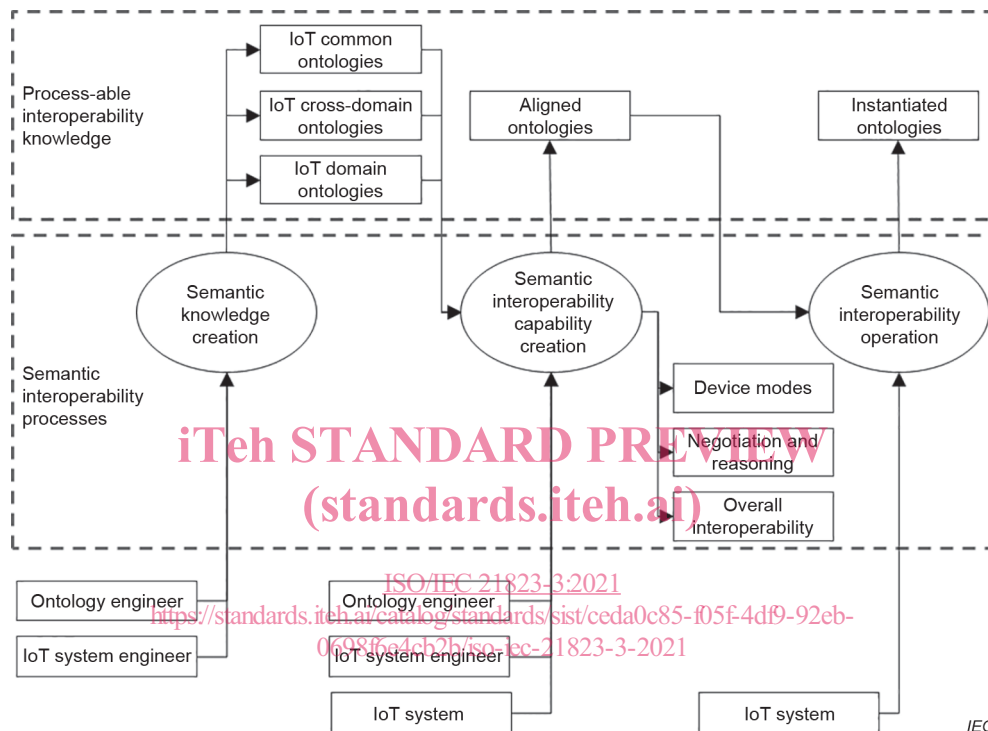


Figure 5 – IoT semantic interoperability process model

IoT semantic interoperability involves the following stakeholders:

- ontology engineers, who focus on ontology development;
- IoT system engineers, who focus on the development of IoT systems and the integration of interoperability capabilities.

IoT semantic interoperability includes the following processes.

- a) Semantic knowledge creation: the purpose of this process is to create semantic information for interoperability. This process is carried out by ontology engineers and IoT system engineers. The input to this process is the knowledge of the engineers. The outcome of this process is a consistent digital representation of the semantic information used for interoperability, represented by ontologies, including IoT common ontologies, IoT cross-domain ontologies and IoT domain ontologies.
- b) Semantic interoperability capability creation: the purpose of this process is to create semantic interoperability capabilities and to adapt semantic information to a desired semantic information representation. The capabilities are the following:
 - 1) device mode capability;
 - 2) negotiation and reasoning capability;
 - 3) overall interoperability.

This process is carried out by ontology engineers, IoT system engineers as well as the IoT system itself if it has semantic information adaptation processing capabilities. The input to this process is the IoT domain, IoT cross-domain and IoT common ontologies. The outcome of this process is aligned ontologies.

This process is assisted by ontology engineering support tools, as well as reasoning capabilities such as rule-based reasoning, ontology-based reasoning or machine learning.

- c) Semantic interoperability use: the purpose of this process is to exchange semantic information with other IoT systems. This process is carried out by the IoT system. The input to this is the aligned ontologies. The outcome of this process is instantiated ontologies.

This process is assisted by ontology engineering support tools, as well as reasoning capabilities such as rule-based reasoning, ontology-based reasoning or machine learning.

The use of semantic information is based on the model shown in Figure 6.

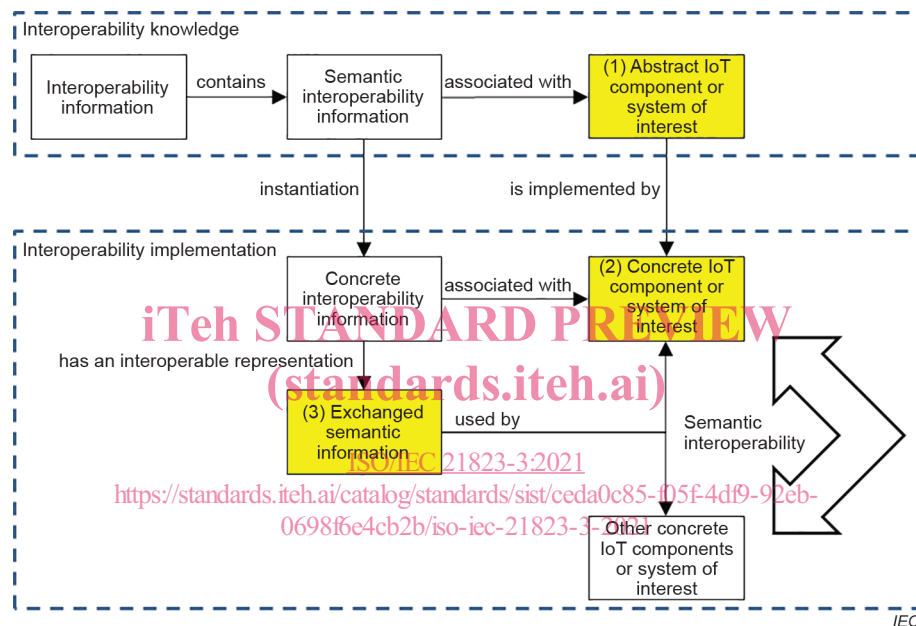


Figure 6 – Semantic information usage model

The semantic information usage model includes the following.


- An abstract model of an IoT component or system-of-interest: interoperability information contains semantic interoperability information which is associated with an abstract IoT component or system-of-interest in a domain. An example is a temperature model associated with an abstract IoT temperature sensor.
- A concrete model of the IoT component of system-of-interest: concrete interoperability information is associated with the concrete IoT component or system-of-interest in operation. An example is the instantiated temperature model associated with a physical temperature sensor.
- Exchanged semantic information: a computer processable representation of semantic information that can be used by other concrete IoT components of systems. An example is the interoperable representation of the temperature information provided by the physical temperature sensor.

5.4 IoT semantic interoperability guidelines

5.4.1 Guidelines on the capture of semantic meaning

The capture of semantic meaning is achieved through the semantic knowledge creation process as described in Figure 5. It includes the use of the following knowledge.

- IoT common ontologies. They refer to common concepts such as architecture or framework concepts. Ontologies can be based on IoT standards such as ISO/IEC 30141:2018 [1], ISO/IEC 20924:2018 [2], or on mapping specifications such as [3].
- IoT cross-domain ontologies. They refer to shared concepts between domains, at the application level (e.g. electric mobility ontologies which mix energy and transport knowledge), or at the cross-cutting concern. For instance, privacy cross-cutting concerns can be based on privacy standards such as ISO/IEC 29100:2011 [4].
- IoT domain ontologies. For instance, in the energy domain, a common ontology for energy management can be used [5]. Another example could be in the smart city domain [6], in the smart manufacturing domain [7], or in the agriculture domain [8].

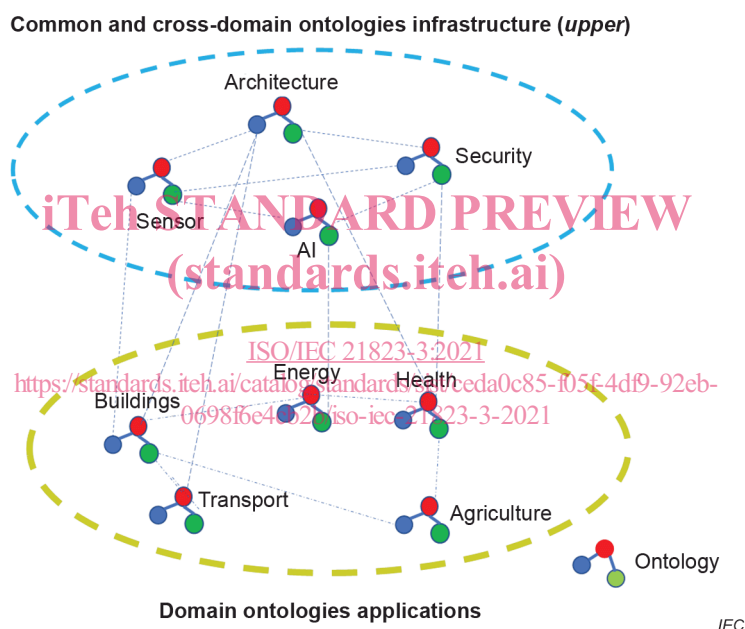

NOTE Ontologies are often represented by triples. They are visually displayed in the figure using three connected circles.

Figure 7 – Example of structured knowledge representation

Figure 7 shows an example of how semantic interoperability knowledge can be structured. It includes:

- common and cross-domain ontologies, such as an architecture ontology, a sensor ontology, a security or privacy ontology;
- domain-specific ontologies related to applications, such as a health ontology, a transport ontology, an energy ontology, or an agriculture ontology. There are many domain-specific ontologies that can be used to structure semantic interoperability knowledge. See, for instance, LOV4IoT [9], the Linked Open Vocabulary Initiative for the Internet of Things.

Ontologies are built using semantic web languages such as RDF [10], RDFS [11] and OWL [12], and queried with SPARQL [13].

- RDF is a basic language based on triples. A triple comprises a subject, a predicate, and an object. For instance, "temperature is 39": "temperature" is the subject, "is" is the predicate, and "39" is the object.