



SLOVENSKI STANDARD
oSIST prEN IEC 60309-1:2019
01-oktober-2019

Vtiči, fiksne ali prenosne vtičnice in vtičnice za industrijsko rabo - 1. del: Splošne zahteve

Plugs, fixed or portable socket- outlets and appliance inlets for industrial purposes - Part 1: General requirements

Stecker, Steckdosen und Kupplungen für industrielle Anwendungen - Teil 1: Allgemeine Anforderungen

Prises de courant pour usages industriels - Partie 1: Règles générales

Ta slovenski standard je istoveten z: prEN IEC 60309-1:2019

ICS:

29.120.30 Vtiči, vtičnice, spojke Plugs, socket-outlets, couplers

oSIST prEN IEC 60309-1:2019 **en,fr,de**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021)

<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021>



23H/456/CDV

COMMITTEE DRAFT FOR VOTE (CDV)

PROJECT NUMBER: IEC 60309-1 ED5	
DATE OF CIRCULATION: 2019-08-09	CLOSING DATE FOR VOTING: 2019-11-01
SUPERSEDES DOCUMENTS: 23H/431/CD,23H/452/CC	

IEC SC 23H : PLUGS, SOCKET-OUTLETS AND COUPLERS FOR INDUSTRIAL AND SIMILAR APPLICATIONS, AND FOR ELECTRIC VEHICLES	
SECRETARIAT: France	SECRETARY: Mr Bertrand Doignon
OF INTEREST TO THE FOLLOWING COMMITTEES:	PROPOSED HORIZONTAL STANDARD: <input type="checkbox"/> Other TC/SCs are requested to indicate their interest, if any, in this CDV to the secretary.
FUNCTIONS CONCERNED: <input type="checkbox"/> EMC <input type="checkbox"/> ENVIRONMENT <input type="checkbox"/> QUALITY ASSURANCE <input type="checkbox"/> SAFETY	
<input checked="" type="checkbox"/> SUBMITTED FOR CENELEC PARALLEL VOTING	<input type="checkbox"/> NOT SUBMITTED FOR CENELEC PARALLEL VOTING
<p>Attention IEC-CENELEC parallel voting</p> <p>The attention of IEC National Committees/members of CENELEC, is drawn to the fact that this Committee Draft for Vote (CDV) is submitted for parallel voting.</p> <p>The CENELEC members are invited to vote through the CENELEC online voting system.</p>	

This document is still under study and subject to change. It should not be used for reference purposes.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

TITLE:

Plugs, fixed or portable socket-outlets and appliance inlets for industrial purposes - Part 1: General requirements

PROPOSED STABILITY DATE: 2025

NOTE FROM TC/SC OFFICERS:

Pursuant to a decision taken during the last plenary meeting of SC 23H in Busan in 2018, the term "connector" will be no longer used in IEC 60309 series. As a consequence, 60309 series is renamed "PLUGS, FIXED OR PORTABLE SOCKET-OUTLETS AND APPLIANCE INLETS FOR INDUSTRIAL PURPOSES". This decision has no impact on the French title.

Copyright © 2019 International Electrotechnical Commission, IEC. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

1		
2		
3	FOREWORD.....	5
4	INTRODUCTION.....	7
5	1 Scope.....	8
6	2 Normative references	8
7	3 Terms and definitions	9
8	4 General	16
9	5 Standard ratings	17
10	6 Classification.....	18
11	7 Marking	19
12	8 Dimensions	23
13	9 Protection against electric shock	23
14	10 Provision for earthing	27
15	11 Terminals and terminations.....	27
16	12 Interlocks.....	44
17	13 Resistance to ageing of rubber and thermoplastic material	44
18	14 Construction	45
19	15 Construction of socket-outlets	46
20	16 Construction of plugs and portable socket-outlets	47
21	17 Construction of appliance inlets	48
22	18 Degrees of protection	49
23	19 Insulation resistance and dielectric strength	50
24	20 Breaking capacity	51
25	21 Normal operation	54
26	22 Temperature rise	56
27	23 Flexible cables and their connection	58
28	24 Mechanical strength	64
29	25 Screws, current-carrying parts and connections.....	70
30	26 Creepage distances, clearances and distances through sealing compound.....	73
31	27 Resistance to heat, to fire and to tracking.....	75
32	28 Corrosion and resistance to rusting	76
33	29 Conditional short-circuit current withstand	77
34	30 Electromagnetic compatibility	81
35	Annex A (normative) Guidance and description of test apparatus.....	83
36	Bibliography.....	91
37		

38	Figure 1 – Diagram showing the use of the accessories	11
39	Figure 2 – Pillar terminals	12
40	Figure 3 – Screw terminals	12
41	Figure 4 – Stud terminals	13
42	Figure 5 – Saddle terminals	13
43	Figure 6 – Lug terminals	13
44	Figure 7 – Mantle terminals	14
45	Figure 8 – Screwless terminals	14
46	Figure 9 – Insulation piercing terminals.....	15
47	Figure 10 – Test piston	22
48	Figure 11 – Gauge “A” for checking shutters	25
49	Figure 12 – Gauge “B” for checking shutters	26
50	Figure 13 – Gauges for testing insertability of round unprepared conductors having the	
51	maximum specified cross-section.....	33
52	Figure 14 – Information for the bending test.....	36
53	Figure 15 – Test arrangement for terminals	40
54	Figure 16 – Circuit diagrams for breaking capacity and normal operation tests	53
55	Figure 17 – Apparatus for testing the cable anchorage	61
56	Figure 18 – Arrangement for mechanical strength test for plugs and portable socket-	
57	outlets	66
58	Figure 19 – Apparatus for flexing test	67
59	Figure 20 – Diagram of the test circuit for the verification of short-circuit current	
60	withstand of a two-pole equipment on a single-phase AC or DC	79
61	Figure 21 – Diagram of the test circuit for the verification of short-circuit current	
62	withstand of a three-pole equipment	80
63	Figure 22 – Diagram of the test circuit for the verification of short-circuit current	
64	withstand of a four-pole equipment	81
65	Figure A.1 – Impact test fixture – Pendulum assembly	85
66	Figure A.2 – Impact test fixture – Pendulum masses – Quantity: 4	86
67	Figure A.3 – Impact test fixture – Pendulum shaft end	87
68	Figure A.4 – Impact test fixture – Pendulum anvil	88
69	Figure A.5 – Impact test fixture – Pendulum shaft	88
70	Figure A.6 – Impact text fixture – Pendulum pivot	89
71	Figure A.7 – Impact test apparatus – Back and mounting plates	90
72		
73	Table 1 - Preferred rated currents	17
74	Table 2 – Colour coding	22
75	Table 3 – Size for connectable conductors.....	31
76	Table 4 – Deflection test forces	37
77	Table 5 – Pulling test values on terminals	41
78	Table 6 – Pulling force	42
79	Table 7 – Test current.....	43
80	Table 8 – Dielectric strength test	51
81	Table 9 – Breaking capacity.....	54
82	Table 10 – Normal operation.....	55
83	Table 11 – Temperature rise test	57

84	Table 12 – Types of cables	59
85	Table 13 – Dimensions of cables	62
86	Table 14 – Torque test values.....	63
87	Table 15 – Blow test impact energy	65
88	Table 16 – Flexing test load values.....	68
89	Table 17 – Test values for screwed glands	68
90	Table 18 – Pulling force on insulated end caps	70
91	Table 19 – Tightening torques	71
92	Table 20 - Creepage distances, clearances and distances through sealing compound	73
93	Table A.1 – Impact test release angles	86
94		

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021)

<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PLUGS, FIXED OR PORTABLE SOCKET-OUTLETS AND
APPLIANCE INLETS FOR INDUSTRIAL PURPOSES –**

Part 1: General requirements

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3->
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60309-1 has been prepared by subcommittee SC 23H: Plugs, socket-outlets and couplers for industrial and similar applications, and for electric vehicles, of IEC technical committee 23: Electrical accessories.

This fifth edition cancels and replaces the fourth edition published in 1999, Amendment 1:[2005] and Amendment 2:[2012]. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) addition of classification, requirements and tests for accessories with shutters;
- b) Additional marking to indicate neutral terminal and/or earthing terminal;

150 The text of this International Standard is based on the following documents:

FDIS	Report on voting
23H/---/FDIS	23H/---/RVD

151

152 Full information on the voting for the approval of this International Standard can be found in
153 the report on voting indicated in the above table.

154 This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

155 The committee has decided that the contents of this document will remain unchanged until the
156 stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to
157 the specific document. At this date, the document will be

- 158 • reconfirmed,
- 159 • withdrawn,
- 160 • replaced by a revised edition, or
- 161 • amended.

162

iTeh STANDARD PREVIEW (standards.iteh.ai)

[kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021)

<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021>

163

INTRODUCTION

164 A list of all the parts in the IEC 60309 series, under the general title *Plugs, fixed or portable*
165 *socket-outlets, and appliance inlets*, can be found on the IEC website.

166 Subsequent parts of IEC 60309 deal with the requirements of particular types of accessories.
167 The clauses of these particular requirements supplement or modify the corresponding clauses
168 in Part 1.

169 In this standard, the following print types are used:

- 170 – requirements proper: in roman type;
- 171 – *test specifications: in italic type;*
- 172 – notes: in smaller roman type.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021)

<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021>

PLUGS, FIXED OR PORTABLE SOCKET-OUTLETS AND APPLIANCE INLETS FOR INDUSTRIAL PURPOSES –

Part 1: General requirements

173
174
175
176
177
178
179

180 **1 Scope**

181 This international standard applies to plugs, fixed or portable socket outlets and appliance
182 inlets hereinafter referred to as accessories, with a rated operating voltage not exceeding
183 1 000 V DC or 1000 V AC not exceeding 500 Hz and a rated current not exceeding 800 A,
184 primarily intended for industrial use, either indoors or outdoors.

185 These accessories are intended to be installed by instructed persons (IEV 195-04-02) or
186 skilled persons (IEV 195-04-01) only.

187 The list of preferred ratings is not intended to exclude other ratings.

188 This document applies to accessories for use when the ambient temperature is normally
189 within the range of –25 °C to +40 °C.

190 These accessories are intended to be connected to cables of copper or copper alloy only.

191 This document applies to accessories with screwless type terminals or insulation piercing
192 terminals, with a rated current up to and including 32 A for series I and 30 A for series II.

193 The use of these accessories on building sites and for agricultural, commercial and domestic
194 applications is not precluded. [kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-21c571683/iec-60309-1-2019)

195 Fixed socket-outlets or appliance inlets incorporated in or fixed to electrical equipment are
196 within the scope of this standard. This standard also applies to accessories intended to be
197 used in extra-low voltage installations.

198 This document does not apply to accessories primarily intended for domestic and similar
199 general purposes.

200 This document does not cover single-pole accessories

201 In locations where special conditions prevail, for example on board ship or where explosions
202 are liable to occur, additional requirements may be necessary.

203 **2 Normative references**

204 The following documents are referred to in the text in such a way that some or all of their
205 content constitutes requirements of this document. For dated references, only the edition
206 cited applies. For undated references, the latest edition of the referenced document (including
207 any amendments) applies.

208 IEC 60050, *International Electrotechnical Vocabulary (IEV)*

209 IEC 60068-2-14, Environmental testing – Part 2-14: Tests – Test N: Change of temperature

210 IEC 60083, *Plugs and socket-outlets for domestic and similar general use standardized in*
211 *member countries of IEC*

212 IEC 60112, *Method for determining the comparative and the proof tracking indices of solid*
213 *insulating materials under moist conditions*

- 214 IEC 60227, (all parts) *Polyvinyl chloride insulated cables of rated voltages up to and including*
215 *450/750 V*
- 216 IEC 60228, *Conductors of insulated cables*
- 217 IEC 60245-4, *Rubber insulated cables – Rated voltages up to and including 450/750 V – Part 4:*
218 *Cords and flexible cables*
- 219 IEC 60269-1, *Low-voltage fuses – Part 1: General requirements*
- 220 IEC 60269-2, *Low-voltage fuses – Part 2: Supplementary requirements for fuses for use by*
221 *authorized persons (fuses mainly for industrial application) – Sections I to III*
- 222 IEC 60309-4, *Plugs, socket-outlets and couplers for industrial purposes – Part 4: fixed and*
223 *portable switched socket-outlets with or without interlock*
- 224 IEC 60320, (all parts) *Appliance couplers for household and similar general purposes*
- 225 IEC 60529, *Degrees of protection provided by enclosures (IP code)*
- 226 IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1:*
227 *Principles, requirements and tests*
- 228 IEC 60664-3, *Insulation coordination for equipment within low-voltage systems – Part 3: Use*
229 *of coating, potting or moulding for protection against pollution*
- 230 IEC 60695-2-11, *Fire hazard testing –Part 2-11: Glowing/hot-wire based test methods – Glow-*
231 *wire flammability test method for end-products (GWEPT)*
- 232 IEC 60695-10-2, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test*
- 233 IEC 60947-3, *Low-voltage switchgear and controlgear – Part 3: Switches, disconnectors,*
234 *switch-disconnectors and fuse-combination units*
- 235 ISO 2081, *Metallic and other inorganic coatings – Electroplated coatings of zinc with*
236 *supplementary treatments on iron or steel*
- 237 ISO 2093, *Electroplated coatings of tin – Specification and test methods*
- 238 ISO 1456, *Metallic and other inorganic coatings – Electrodeposited coatings of nickel, nickel*
239 *plus chromium, copper plus nickel and of copper plus nickel plus chromium*

240 **3 Terms and definitions**

241 For the purpose of this document, the following terms and definitions apply.

242 ISO and IEC maintain terminological databases for use in standardization at the following
243 addresses:

- 244 • IEC Electropedia: available at <http://www.electropedia.org/>
- 245 • ISO Online browsing platform: available at <http://www.iso.org/obp>

246 Where the terms voltage and current are used, they imply the DC or the AC root mean square
247 (RMS) values.

248 The application of accessories is shown in Figure 1.

249 **3.1**

250 **fixed socket outlet**

251 part intended to be installed with the fixed wiring or incorporated in equipment.

252 Note 1 to entry: A socket-outlet may also be incorporated in the output circuit of an isolating transformer

253 Note 2 to entry: In some countries fixed socket outlets are called "receptacles"

254 Note 3 to entry: when the term “socket-outlet” is used alone, it covers both fixed and portable socket-outlets

255 **3.2**

256 **plug**

257 part integral with or intended to be attached directly to one flexible cable connected to the
258 equipment or to a portable socket-outlet

259 Note 1 to entry: In French the combination of a plug and a socket-outlet is called “prise de courant”

260 **3.3**

261 **portable socket outlet**

262 part integral with or intended to be attached to one flexible cable connected to the supply

263 Note 1 to entry: In general, a portable socket-outlets has the same contact arrangement as a fixed socket-outlet.

264 Note 2 to entry: The combination of a portable socket outlet and a plug is called a “cable coupler”.

265 Note 3 to entry: when the term “socket-outlet” is used alone, it covers both fixed and portable socket-outlets

266 **3.4**

267 **appliance inlet**

268 part incorporated in, or fixed to, the equipment or intended to be fixed to it

269 Note 1 to entry: In general, an appliance inlet has the same contact arrangement as a plug.

270 Note 2 to entry: The combination of a portable socket outlet and an appliance inlet is called an “appliance coupler”.

271 **3.5**

272 **Main part**

273 part of an accessory carrying the contacts

274 **3.6**

275 **rewireable plug or portable socket-outlet**

276 an accessory so constructed that the flexible cable can be replaced


277 **3.7**

278 **non-rewireable plug or portable socket-outlet**

279 an accessory so constructed that the flexible cable cannot be separated from the accessory
280 without making it permanently useless

iTeh STANDARD PREVIEW
(standards.iteh.ai)

oSIST prEN IEC 60309-1:2019
<https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-pr-en-iec-60309-1-2021>

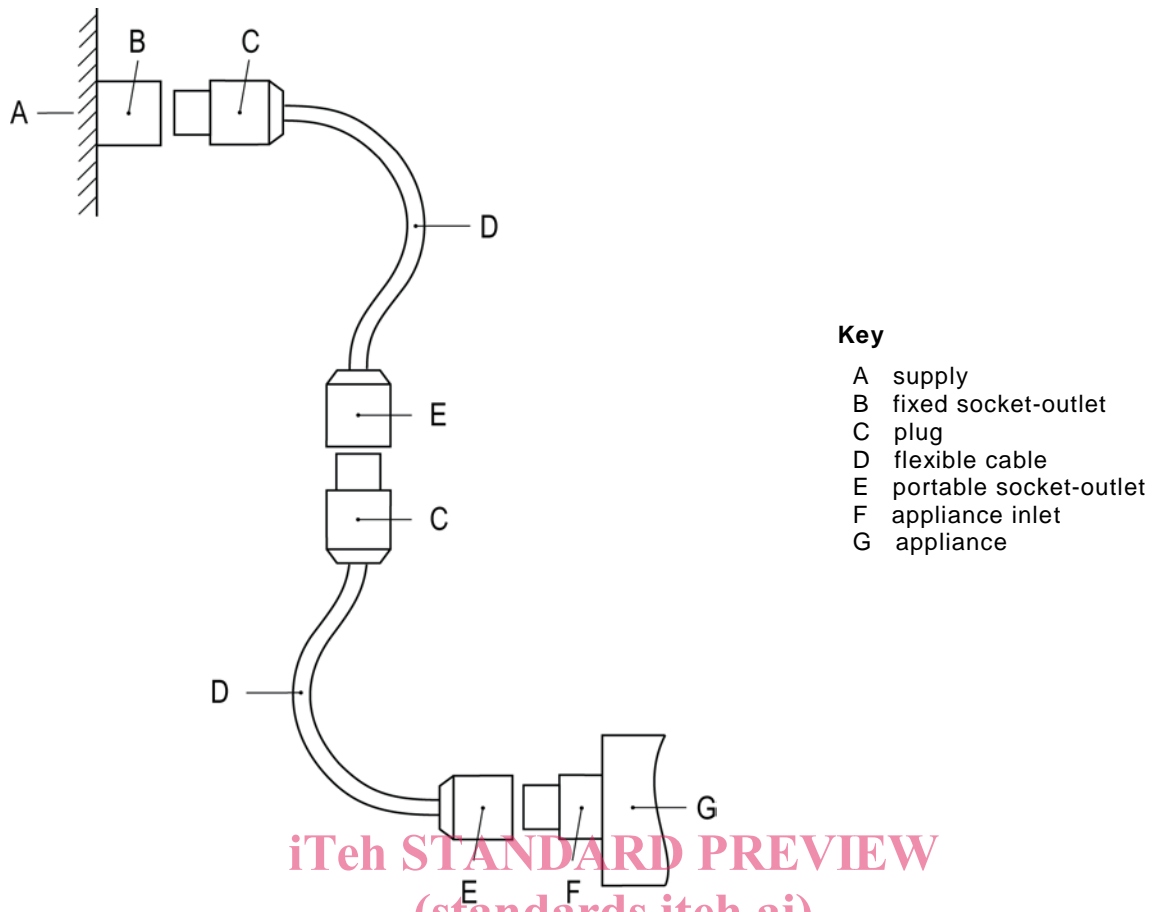**Key**

- A supply
- B fixed socket-outlet
- C plug
- D flexible cable
- E portable socket-outlet
- F appliance inlet
- G appliance

Figure 1 – Diagram showing the use of the accessories

281

282 **3.8**
283 **interlock**

284 a device, either electrical or mechanical, which prevents the contacts of a plug from becoming
285 live before it is in proper engagement with a fixed or portable socket-outlet, and which either
286 prevents the plug from being withdrawn while its contacts are live or makes the contacts dead
287 before separation

288 **3.9**
289 **retaining device**

290 a mechanical arrangement which holds a plug or portable socket-outlet in position when it is
291 in proper engagement, and prevents its unintentional withdrawal

292 **3.10**
293 **rated current**

294 the current assigned to the accessory by the manufacturer

295 **3.11**
296 **insulation voltage**

297 the voltage assigned to the accessory by the manufacturer and to which dielectric tests,
298 clearances and creepage distances are referred

299 **3.12**
300 **rated operating voltage**

301 the nominal voltage of the supply for which the accessory is intended to be used

302 Note 1 to entry: an accessory may have a rated operating voltage range

303 Note 2 to entry: an accessory may have more than one rated operating voltage

304 **3.13**
 305 **basic insulation**
 306 the insulation necessary for the proper functioning of the accessory and for basic protection
 307 against electric shock

308 **3.14**
 309 **supplementary insulation (protective insulation)**
 310 an independent insulation provided in addition to the basic insulation, in order to ensure
 311 protection against electric shock in the event of a failure of the basic insulation

312 **3.15**
 313 **double insulation**
 314 insulation comprising both basic insulation and supplementary insulation

315 **3.16**
 316 **reinforced insulation**
 317 an improved basic insulation with such mechanical and electrical qualities that it provides the
 318 same degree of protection against electric shock as double insulation

319 **3.17**
 320 **terminal**
 321 a conductive part provided for the connection of a conductor to an accessory

322 **3.17.1**
 323 **pillar terminal**
 324 a terminal in which the conductor is inserted into a hole or cavity, where it is clamped under
 325 the shank of the screw or screws. The clamping pressure may be applied directly by the
 326 shank of the screw or through an intermediate clamping member to which pressure is applied
 327 by the shank of the screw (see Figure 2)

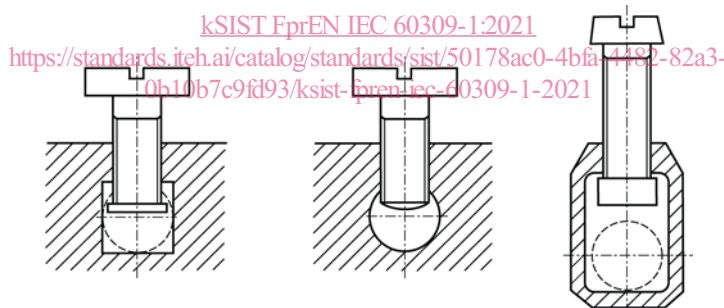


Figure 2 – Pillar terminals

330 **3.17.2**
 331 **screw terminal**
 332 a terminal in which the conductor is clamped under the head of the screw. The clamping
 333 pressure may be applied directly by the head of the screw or through an intermediate part,
 334 such as a washer, clamping plate or anti-spread device (see Figure 3)


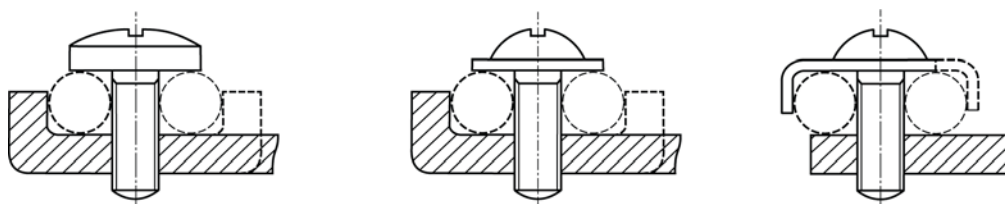


Figure 3 – Screw terminals

337 **3.17.3**
338 **stud terminal**

339 a terminal in which the conductor is clamped under a nut. The clamping pressure may be
340 applied directly by a suitably shaped nut or through an intermediate part, such as a washer,
341 clamping plate or anti-spread device (see Figure 4)

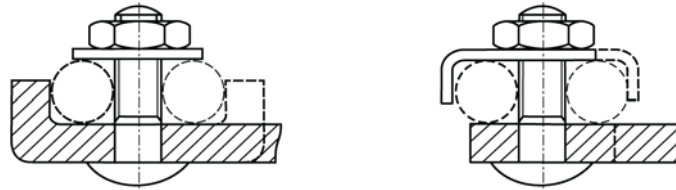


342

343

Figure 4 – Stud terminals

344 **3.17.4**
345 **saddle terminal**

346 a terminal in which the conductor is clamped under a saddle by means of two or more screws
347 or nuts (see Figure 5)

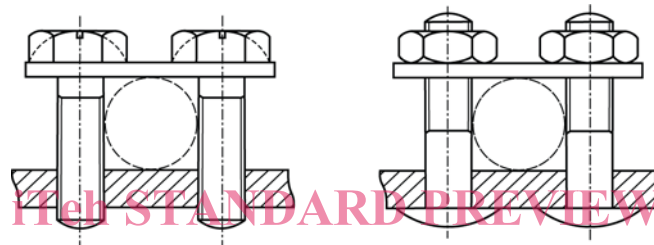

348


349

(standards.iteh.ai)
Figure 5 – Saddle terminals

[kSIST FprEN IEC 60309-1:2021](https://standards.iteh.ai/catalog/standards/sist/50178ac0-4bfa-4482-82a3-0b10b7c9fd93/ksist-fpren-iec-60309-1-2021)

350 **3.17.5**
351 **lug terminal**

352 a screw terminal or a stud terminal, designed for clamping a cable lug or bar by means of a
353 screw or nut (see Figure 6)

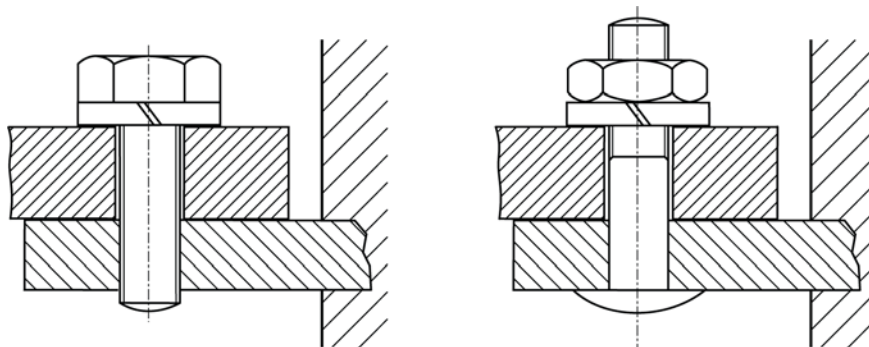

354

355

Figure 6 – Lug terminals

356 **3.17.6**
357 **mantle terminal**

358 a terminal in which the conductor is clamped against the base of a slot in a threaded stud by
359 means of a nut. The conductor is clamped against the base of the slot by a suitably shaped
360 washer under the nut, by a central peg if the nut is a cap nut, or by equally effective means
361 for transmitting the pressure from the nut to the conductor within the slot (see Figure 7)