

INTERNATIONAL STANDARD

This full version of IEC 60884-2-6:2025 includes the content of the references made to IEC 60884-1:2022

**Plugs and socket-outlets for household and similar purposes –
Part 2-6: Particular requirements for switched socket-outlets with interlock for
fixed electrical installations**

get full document from standards.iteh.ai



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2025 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



IEC 60884-2-6

Edition 2.0 2025-02
EXTENDED VERSION

INTERNATIONAL STANDARD

This full version of IEC 60884-2-6:2025 includes the content of the references made to IEC 60884-1:2022

**Plugs and socket-outlets for household and similar purposes –
Part 2-6: Particular requirements for switched socket-outlets with interlock for
fixed electrical installations**

get full document from standards.iteh.ai

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.120.30

ISBN 978-2-8327-0266-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	6
1 Scope.....	8
2 Normative references	8
3 Terms and definitions	10
4 General requirements	17
5 General remarks on tests	17
6 Ratings.....	20
7 Classification	20
8 Marking	23
9 Checking of dimensions.....	28
10 Protection against electric shock	29
11 Provision for earthing	36
12 Terminals and terminations.....	38
13 Construction of fixed socket-outlets	58
14 Construction of plugs and portable socket-outlets	71
15 Interlocked socket-outlets.....	71
16 Resistance to ageing, protection provided by enclosures, and resistance to humidity.....	73
17 Insulation resistance and electric strength	80
18 Operation of earthing contacts	82
19 Temperature rise	82
20 Breaking capacity	90
21 Normal operation	94
22 Force necessary to withdraw the plug	95
23 Flexible cables and their connection	99
24 Mechanical strength	99
25 Resistance to heat.....	117
26 Screws, current-carrying parts and connections.....	120
27 Creepage distances, clearances and distances through sealing compound.....	122
28 Resistance of insulating material to abnormal heat, to fire and to tracking	124
29 Resistance to rusting	129
30 Additional tests on pins provided with insulating sleeves	129
31 EMC requirements	129
32 Electromagnetic fields (EMF) requirements.....	130
Annex A (normative) Safety-related routine tests for factory-wired portable accessories (protection against electric shock and correct polarity)	131
Annex B (informative) Alternative gripping tests	132
Annex C (normative) Switches incorporated in portable socket-outlets.....	133
Annex D (normative) Requirements for plugs and fixed or portable socket-outlets intended to be used with AWG cables	134
Annex E (informative) Tests to be applied during the production of crimped connections in accessories	147

Annex F (normative) Additional requirements for accessories provided with insulation-piercing terminals	149
Annex G (informative) Additional tests and requirements for accessories intended to be used in ambient temperatures below $-5\text{ }^{\circ}\text{C}$ down to and including $-45\text{ }^{\circ}\text{C}$	159
Annex H (informative) Additional tests and requirements for accessories intended to be used in ambient temperatures above $+40\text{ }^{\circ}\text{C}$ up to and including $+70\text{ }^{\circ}\text{C}$	164
Annex I (normative) Additional requirements and tests for plugs and socket-outlets for high-load (HL) application	167
Bibliography.....	168
Figure 1 – Examples of accessories.....	10
Figure 2 – Example of thread-forming screw	13
Figure 3 – Example of thread-cutting screw	14
Figure 4 – Examples of membranes and grommets	15
Figure 5 – Test piston dimensions.....	27
Figure 6 – Arrangement for compression test.....	30
Figure 7 – Gauge for checking non-accessibility of live parts, through shutters	33
Figure 8 – Gauge for checking non-accessibility of live parts, through shutters, and of live parts of socket-outlets with increased protection.....	34
Figure 9 – Pillar terminals	41
Figure 10 – Screw head terminals and stud terminals	42
Figure 11 – Saddle terminals	43
Figure 12 – Mantle terminals.....	44
Figure 13 – Arrangement for checking damage to conductors.....	45
Figure 14 – Information for deflection test.....	56
Figure 15 – Verification of the requirements of 13.4	62
Figure 16 – Device for checking the resistance to lateral strain	66
Figure 101 – Circuit for the tests of 15.101	71
Figure 18 – Types of test wall	77
Figure 19 – Test set-up in accordance with 16.2.3	78
Figure 20 – Clamping unit for the temperature rise test of Clause 19	85
Figure 21 – Example of a trend line calculation.....	90
Figure 22 – Example of apparatus for breaking capacity and normal operation test.....	92
Figure 23 – Circuit diagrams for breaking capacity and normal operation tests	93
Figure 25 – Apparatus for verification of maximum withdrawal force	96
Figure 26 – Gauge for the verification of minimum withdrawal force	97
Figure 29 – Sketches showing the application of the blows according to Table 23.....	102
Figure 30 – Apparatus for impact test at low temperature of 24.5.....	105
Figure 31 – Apparatus for abrasion test on insulating sleeves of plug pins.....	106
Figure 32 – Arrangement for mechanical strength test on multiple portable socket-outlets	108
Figure 33 – Example of test arrangement to verify the retention of pins in the body of the plug	109
Figure 34 – Arrangement for test on covers or cover-plates	112
Figure 35 – Gauge (thickness about 2 mm) for the verification of the outline of covers or cover-plates.....	113

Figure 36 – Examples of application of the gauge of Figure 35 on covers fixed without screws on a mounting surface or supporting surface	114
Figure 37 – Examples of application of the gauge of Figure 35 in accordance with the requirements of 24.16	115
Figure 38 – Gauge for verification of grooves, holes and reverse tapers	116
Figure 39 – Sketch showing the direction of application of the gauge of Figure 38	116
Figure 40 – Ball pressure test apparatus	118
Figure 41 – Apparatus for compression test for the verification of resistance to heat specification of 25.5	119
Figure 42 – Diagrammatic representation of 28.1.2	126
Figure 43 – Apparatus for testing resistance to abnormal heat of insulating sleeves of plug pins	128
Figure F.1 – Example of IPTs	157
Figure F.2 – Example of test-points	157
Figure F.3 – Temperature cycle for voltage drop test 12.4.11	158
Figure H.1 – Schematic drawing of a de-rating curve with an example of a de-rated current I_d at the operating ambient temperature t_d	165
Table 1 – Survey of specimens needed for tests	18
Table 2 – Preferred combinations of types and ratings	20
Table 3 – Gauge tolerances	28
Table 4 – Relationship between rated current and connectable nominal cross-sectional areas of copper conductors	38
Table 5 – Values for pull test for screw-type terminals	46
Table 6 – Composition of conductors	47
Table 7 – Tightening torques for the verification of the mechanical strength of screw-type terminals	49
Table 8 – Relationship between rated current and connectable cross-sectional areas of copper conductors for screwless-type terminals	50
Table 9 – Value for pull test for screwless-type-type terminals	52
Table 10 – Values for flexing under mechanical load test for copper conductors	53
Table 11 – Test current for the verification of electrical and thermal stresses in normal use for screwless-type terminals	53
Table 12 – Nominal cross-sectional areas of rigid copper conductors for deflection test of screwless-type terminals	56
Table 13 – Deflection test forces for screwless-type terminals	57
Table 14 – Forces to be applied to covers, cover-plates or actuating members whose fixing is not dependent on screws	64
Table 15 – External cable dimension limits for surface-type socket-outlets	68
Table 16 – Nominal cross-sectional areas of copper conductors for the temperature-rise test	82
Table 17 – Test current for cycling tests on accessories with crimped connection	89
Table 19 – Maximum and minimum withdrawal force for plugs and socket-outlets	98
Table 23 – Height of fall for impact tests	101
Table 24 – Torque test values for cable glands	106
Table 25 – Resistance to heat of different types or parts of accessories	117

Table 26 – Creepage distances, clearances and distances through insulating sealing compound.....	123
Table F.1 – Relationship between rated currents and connectable cross-sectional areas of copper conductors for IPTs	152
Table F.2 – Test current for the verification of electrical and thermal stresses in normal use of IPTs	156
Table G.1 – Energy for impact tests	162

Sample Document

get full document from standards.iteh.ai

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PLUGS AND SOCKET-OUTLETS FOR HOUSEHOLD AND SIMILAR PURPOSES –

Part 2-6: Particular requirements for switched socket-outlets with interlock for fixed electrical installations

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

This extended version (EXV) of the official IEC Standard provides the user with the full content of the Standard.

IEC 60884-2-6:2025 EXV includes the content of IEC 60884-2-6:2025, and the references made to IEC 60884-1:2022.

The specific content of IEC 60884-2-6:2025 is displayed on a blue background.

IEC 60884-2-6 has been prepared by subcommittee 23B: Plugs, socket-outlets and switches, of IEC technical committee 23: Electrical accessories. It is an International Standard.

This second edition cancels and replaces the first edition published in 1997. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) alignment to IEC 60884-1, fourth edition.

The text of this International Standard is based on the following documents:

Draft	Report on voting
23B/1547/FDIS	23B/1561/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

This document is to be used in conjunction with IEC 60884-1:2022.

This document supplements or modifies the corresponding clauses in IEC 60884-1:2022, so as to convert that publication into the IEC standard: Particular requirements for switched socket-outlets without interlock for fixed installations.

When a particular subclause of IEC 60884-1:2022 is mentioned in this document, that subclause applies as far as reasonable. Where this document states "addition", "modification" or "replacement", the relevant text of IEC 60884-1:2022 is to be adapted accordingly.

In this document the following print types are used:

- requirements proper: in roman type;
- *test specifications: in italic type;*
- Explanatory matter: in smaller roman type.

Subclauses, notes, figures and tables or figures which are additional to those in IEC 60884-1:2022 are numbered starting from 101.

A list of all the parts in the IEC 60884 series, under the general title *Plugs and socket-outlets for household and similar purposes*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

PLUGS AND SOCKET-OUTLETS FOR HOUSEHOLD AND SIMILAR PURPOSES –

Part 2-6: Particular requirements for switched socket-outlets with interlock for fixed electrical installations

1 Scope

This part of IEC 60884 applies to switched socket-outlets with interlock for AC only, for fixed electrical installations, with or without earthing contact, with rated voltage above 50 V but not exceeding 440 V and a rated current not exceeding 32 A, intended for household and similar purposes, either indoors or outdoors.

Switched socket-outlets with interlock according to this document consist of a combination of socket-outlets according to IEC 60884-1, interlocked with a switch according to IEC 60669-1 and/or IEC 60669-2-1 supplied as a complete accessory.

The rated current is limited to 16 A maximum for fixed accessories provided with screwless terminals.

This document does not cover requirements for flush mounting boxes.

However, it covers those requirements for surface-type mounting boxes which are necessary for the tests on socket-outlets.

NOTE 1 General requirements for mounting boxes are covered by IEC 60670.

NOTE 2 Interlocked socket-outlets incorporating devices according to IEC 60898, IEC 61008 and IEC 61009 are not covered by this document. This document can be used as a guide for the requirements and tests of these accessories where relevant.

This document does not apply to

- interlocked socket-outlets for industrial purposes;
- interlocked socket-outlets for EV;
- interlocked socket-outlets for SELV.

Plugs and socket-outlets complying with this document are suitable for use at ambient temperatures not normally exceeding +40 °C, but their average temperature over a period of 24 h does not exceed +35 °C, with a lower limit of the ambient air temperature of –5 °C.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-30, *Environmental testing – Part 2-30: Tests – Test Db: Damp heat, cyclic (12 + 12 h cycle)*

IEC 60068-2-31, *Environmental testing – Part 2-31: Tests – Test Ec: Rough handling shocks, primarily for equipment-type specimens*

IEC 60068-2-75, *Environmental testing – Part 2-75: Tests – Test Eh: Hammer tests*

IEC 60112, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60227 (all parts), *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V*

IEC 60245 (all parts), *Rubber insulated cables – Rated voltages up to and including 450/750 V*

IEC 60417, *Graphical symbols for use on equipment* (available at <http://www.graphical-symbols.info/equipment>)

IEC 60423:2007, *Conduit systems for cable management – Outside diameters of conduits for electrical installations and threads for conduits and fittings*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013

IEC 60669 (all parts), *Switches for household and similar fixed-electrical installations*

IEC 60669-1:2017, *Switches for household and similar fixed-electrical installations – Part 1: General requirements*

IEC 60669-2-1:2021, *Switches for household and similar fixed electrical installations – Part 2-1: Particular requirements – Electronic control devices*

IEC 60695-2-10:2021, *Fire hazard testing – Part 2-10: Glowing/hot-wire based test methods – Glow-wire apparatus and common test procedure*

IEC 60695-2-11:2021, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end products (GWEPT)*

IEC 60884-1:2022, *Plugs and socket-outlets for household and similar purposes – Part 1: General requirements*

IEC 60884-2-1, *Plugs and socket-outlets for household and similar purposes – Part 2-1: Particular requirements for fused plugs*

IEC 61032:1997, *Protection of persons and equipment by enclosures – Probes for verification*

IEC 61058 (all parts), *Switches for appliances*

IEC 61545, *Connecting devices – Devices for the connection of aluminium conductors in clamping units of any material and copper conductors in aluminium bodied clamping units*

ISO/IEC Guide 51, *Safety aspects – Guidelines for their inclusion in standards*

ISO 1456:2009, *Metallic and other inorganic coatings – Electrodeposited coatings of nickel, nickel plus chromium, copper plus nickel and of copper plus nickel plus chromium*

ISO 2081:2018, *Metallic and other inorganic coatings – Electroplated coatings of zinc with supplementary treatments on iron or steel*

ISO 2093:1986, *Electroplated coatings of tin – Specification and test methods*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:


- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

NOTE 1 Where the terms "voltage" and "current" are used, they imply RMS values, unless otherwise specified.

NOTE 2 Throughout this document the word "earthing" is used for "protective earthing" unless otherwise stated.


NOTE 3 The term "accessory" is used as a general term covering plugs and socket-outlets; the term "portable accessory" covers plugs and portable socket-outlets. Examples of the use of accessories are shown in Figure 1 a).

NOTE 4 Throughout this document the term "socket-outlet" covers both fixed and portable socket-outlets, except where the reference is specific to one type or the other.

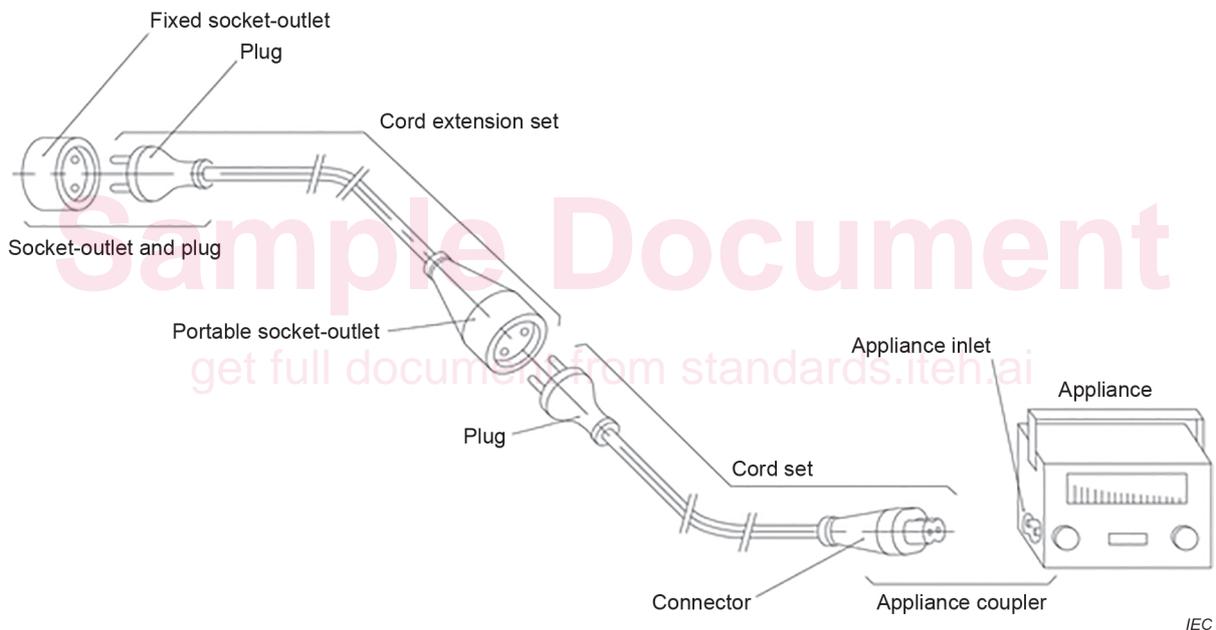

a) Diagram showing various accessories and their use

NOTE Appliance, appliance inlet and appliance coupler are used in this figure only for illustration purposes and they are not covered by this document.

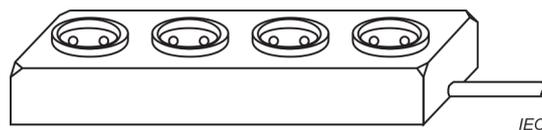

b) Example of a multiple socket-outlet

Figure 1 – Examples of accessories

3.1 plug

accessory having pins designed to engage with the contacts of a socket-outlet

Note 1 to entry: A plug allows the manual connection and disconnection of an electrical load to an electrical supply by an ordinary person.

Note 2 to entry: The plug can be connected to a cable or integrated into an accessory.

Note 3 to entry: In adaptors, the plug can be integral or detachable, see IEC 60884-2-5.

Note 4 to entry: For special purposes such as lighting chains (see also IEC 60598-2-20), two or three single-core cables can be connected within the plug.

3.2

socket-outlet

accessory having socket-contacts designed to engage with the pins of a plug

Note 1 to entry: The socket-outlet can be connected to a cable or integrated into an accessory.

Note 2 to entry: In adaptors, the socket-outlet can be integral or detachable, see IEC 60884-2-5.

3.3

fixed socket-outlet

socket-outlet intended to be installed at a fixed location and be connected to fixed wiring

3.4

portable socket-outlet

socket-outlet intended to be connected to or integral with one flexible cable and which can easily be moved from one place to another while connected to the supply

3.5

multiple socket-outlets

combination of two or more socket-outlets

Note 1 to entry: An example is shown in Figure 1 b).

3.6

rewirable plug

plug so constructed that the flexible cable can be replaced

3.7

non-rewirable plug

assembly of the plug and the flexible cable so constructed that the flexible cable cannot be replaced

3.8

rewirable portable socket-outlet

socket-outlet so constructed that the flexible cable can be replaced

3.9

non-rewirable portable socket-outlet

assembly of the socket-outlet and the flexible cable so constructed that the flexible cable cannot be replaced

3.10

moulded-on accessory

non-rewirable portable accessory the manufacture of which is completed by insulating material moulded around pre-assembled component parts and the terminations for the flexible cable

[SOURCE: IEC 60050-442:1998, 442-01-14, modified – "portable" has been added to the definition and "or cord" has been omitted.]

**3.11
mounting box**

box intended for mounting in or on a wall, floor or ceiling, etc., for flush or surface application, intended for use with fixed socket-outlet(s)

**3.12
cord set**

assembly consisting of a flexible cable or cord fitted with a non-rewirable plug and a non-rewirable connector, intended for the connection of an electrical appliance to the electrical supply

[SOURCE: IEC 60050-442:1998, 442-07-04, and IEC 60050-442:2008, 461-06-16]

**3.13
cord extension set**

assembly consisting of one flexible cable fitted with one plug and one single or multiple portable socket-outlets

**3.14
terminal**

insulated or non-insulated connecting device intended for reusable electrical connection of the external conductors

**3.15
termination**

insulated or non-insulated connecting device intended for non-reusable electrical connection of the external conductors

**3.16
clamping unit**

part(s) of the terminal necessary for the mechanical clamping and the electrical connection of the conductor(s), including the parts which are necessary to ensure correct contact pressure

[SOURCE: IEC 60050-442:1998, 442-06-12]

**3.17
screw-type terminal**

terminal for the connection and subsequent disconnection of one conductor or the interconnection and subsequent disconnection of two or more conductors, the connection being made, directly or indirectly, by means of screws or nuts of any kind

Note 1 to entry: Term entries 3.18 to 3.23 are examples of screw-type terminals.

**3.18
pillar terminal**

screw-type terminal in which the conductor is inserted into a hole or cavity, where it is clamped under the end of the screw or screws

Note 1 to entry: The clamping pressure may be applied directly by the end of the screw or through an intermediate clamping member to which pressure is applied by the end of the screw.

Note 2 to entry: Examples of pillar terminals are shown in Figure 9.

**3.19
stirrup terminal**

pillar terminal where the clamping pressure may be applied indirectly by an intermediate clamping member when the screw is tightened

Note 1 to entry: Examples of stirrup terminals are shown in Figure 9.

3.20 screw head terminal

screw-type terminal in which the conductor is clamped under the head of the screw

Note 1 to entry: The clamping pressure may be applied directly to the head of a screw or through an intermediate part, such as a washer, clamping plate or anti-spread device.

Note 2 to entry: Examples of screw head terminals are shown in Figure 10.

3.21 stud terminal

screw-type terminal in which the conductor is clamped under a nut

Note 1 to entry: The clamping pressure may be applied directly by a suitably shaped nut or through an intermediate part, such as a washer, clamping plate or anti-spread device.

Note 2 to entry: Examples of stud terminals are shown in Figure 10.

3.22 saddle terminal

screw-type terminal in which the conductor is clamped under a saddle by means of two or more screws or nuts

Note 1 to entry: Examples of saddle terminals are shown in Figure 11.

3.23 mantle terminal

screw-type terminal in which the conductor is clamped against the base of a slot in a threaded stud by means of a nut

Note 1 to entry: The conductor is clamped against the base of the slot by a suitably shaped washer under the nut, by a central peg if the nut is a cap nut, or by equally effective means for transmitting the pressure from the nut to the conductor within the slot.

Note 2 to entry: Examples of mantle terminals are shown in Figure 12.

3.24 screwless-type terminal

connecting device for the connection and subsequent disconnection of a rigid (solid or stranded) or flexible conductor or the interconnection of two or more conductors, capable of being dismantled, the connection being made, directly or indirectly, by means of springs, parts of angled, eccentric or conical form, etc., without special preparation of the conductor concerned, other than removal of insulation

3.25 thread-forming screw

screw having an uninterrupted thread, which by screwing in, forms a thread by displacing material

Note 1 to entry: An example of a thread-forming screw is shown in Figure 2.

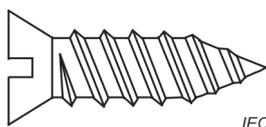


Figure 2 – Example of thread-forming screw

3.26 thread-cutting screw

screw having an interrupted thread, which by screwing in, forms a thread by removing material