

# TECHNICAL REPORT



Internet of things (IoT) –  
Application of sensor network for wireless gas meters

**ITh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/IEC TR 30148:2019

<https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805e96bff/iso-iec-tr-30148-2019>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2019 ISO/IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)**

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[ISO/IEC TR 30148:2019](https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805e96bff/iso-iec-tr-30148-2019)

<https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805e96bff/iso-iec-tr-30148-2019>

iTeh STANDARDS (Standards.iteh.ai)

# TECHNICAL REPORT



---

Internet of things (IoT) – **STANDARD PREVIEW**  
Application of sensor network for wireless gas meters  
(standards.iteh.ai)

ISO/IEC TR 30148:2019  
<https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805e96bff/iso-iec-tr-30148-2019>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 17.120.10; 35.110

ISBN 978-2-8322-7524-5

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	4
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references .....	6
3 Terms and definitions .....	6
4 Symbols and abbreviated terms.....	7
5 Network structure .....	8
6 Application layer protocol .....	9
6.1 Overview.....	9
6.1.1 General .....	9
6.1.2 AL function .....	9
6.1.3 AL structure.....	9
6.2 User application process.....	10
6.2.1 General .....	10
6.2.2 Functions of UAP.....	10
6.2.3 User application object .....	10
6.3 Device management application process .....	10
6.4 Application sub-layer.....	11
6.4.1 General .....	11
6.4.2 Functions of application sub-layer.....	11
6.4.3 Communication models.....	11
6.4.4 Application sub-layer communication service.....	14
6.4.5 Connection service.....	14
6.4.6 Data transmission service.....	20
6.5 Application sub-layer message format.....	22
6.5.1 General .....	22
6.5.2 ASL general message format.....	22
6.5.3 Message formats .....	24
Annex A (informative) Security.....	27
A.1 Overview.....	27
A.2 Security scenario analysis.....	27
A.3 Security services .....	28
Figure 1 – The structure of the wireless gas networks.....	8
Figure 2 – AL structure .....	9
Figure 3 – R/R model interaction process .....	12
Figure 4 – P/S model interaction process.....	13
Figure 5 – R/S model interaction process.....	13
Figure A.1 – Security framework .....	27
Table 1 – ASL services .....	14
Table 2 – Link services provided by the application layer .....	15
Table 3 – Parameters of the LINK. Request primitive .....	15

Table 4 – Parameters of the LINK. Response primitive .....	16
Table 5 – Connect services provided by the application layer .....	16
Table 6 – Parameters of the CONNECT. Request primitive .....	17
Table 7 – Parameters of the CONNECT. Response primitive .....	18
Table 8 – Release services provided by the application layer.....	18
Table 9 – Parameters of the RELEASE. Response primitive .....	19
Table 10 – Parameters of the RELEASE. Confirm primitive.....	19
Table 11 – Parameters of the RELEASE. Notification primitive.....	20
Table 12 – Data transmission services provided by the application layer.....	20
Table 13 – ASLDE-DATA. Request parameters.....	20
Table 14 – ASLDE-DATA. Confirm parameters .....	21
Table 15 – DATA. Indication parameters.....	21
Table 16 – Application sub-layer general message format.....	22
Table 17 – Message control field format.....	22
Table 18 – Message type subfield value .....	22
Table 19 – Format of the security control .....	23
Table 20 – Security control subfield value .....	23
Table 21 – Value of transmission model subfields .....	23
Table 22 – Operation code field value.....	25
Table 23 – Value of command code field.....	25
Table 24 – Acknowledgement message .....	26

# INTERNET OF THINGS (IoT) – APPLICATION OF SENSOR NETWORK FOR WIRELESS GAS METERS

## FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC and ISO technical committees is to prepare International Standards. However, a technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

ISO/IEC TR 30148, which is a Technical Report, has been prepared by subcommittee SC 41: Internet of Things and related technologies, of ISO/IEC joint technical committee 1: Information technology.

The text of this Technical Report is based on the following documents:

Draft TR	Report on voting
JTC1-SC41/90/DTR	JTC1-SC41/104/RVDTR

Full information on the voting for the approval of this Technical Report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A bilingual version of this publication may be issued at a later date.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

With the improvement of wireless communication technologies and the demand for intelligent products required by home automation, factory automation and so on, wireless gas meter systems can develop in terms of safety, reliability, and convenience. Wireless gas meters can not only avoid the errors from manual meter reading and issues such as unstable signals during traditional gas meter reading, but also achieve functions such as dynamic rates, energy management, event alarm service, real-time data collection and analysis.

From the perspective of gas meter companies, the promotion of wireless gas meters is conducive to reducing labour costs and improving efficiency. From the point of view of gas meter manufacturers, the implementation of wireless gas meters will also help them to reduce costs. Consumers will readily accept the lower cost and increased convenience of wireless gas meters. So in the near future, with significant cost benefits and technical advantages, wireless gas meters will become more important in the market.

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

[ISO/IEC TR 30148:2019](#)

<https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805e96bff/iso-iec-tr-30148-2019>

# INTERNET OF THINGS (IoT) – APPLICATION OF SENSOR NETWORK FOR WIRELESS GAS METERS

## 1 Scope

This document describes

- the structure of wireless gas meter networks, and
- the application protocol of wireless gas meter networks.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

**3.1 access point**  
equipment that is used to connect each wireless gas meter to other networks

**3.2 acquisitor**  
equipment that is used for data acquisition, data transmission, and data relay for wireless gas meters

**3.3 application layer**  
layer that performs calculation, processing and management of data collected by the sensing layer

**3.4 application sub-layer**  
layer that provides services for the application layer

**3.5 entity**  
unit that connects to other units defined in the wireless gas meter networks reference architecture with a distinct set of attributes

**3.6 gateway**  
device that is used to connect wireless gas meter networks to outside IP networks

**3.7**

**handheld device**

portable device that is used for provisioning firmware updates and monitoring device status

**3.8**

**message**

data unit conveyed between client and server that represents a specific service request or response

**3.9**

**user application object**

information processing element for a specific process

**3.10**

**user application process**

active process that is used to implement data collection and processing at the upper layer of the application layer

**3.11**

**wireless gas meter**

instrument for recording the quantity of gas passing through a particular outlet, which exchanges data with external devices with a microprocessor and a wireless communication chip as its core

**3.12**

**wireless gas meter system**

system that is composed of remote meter reading management, payment management, accounting management, gas management and data management

**iTeh STANDARD PREVIEW**

(standards.iteh.ai)

ISO/IEC TR 30148:2019


<https://standards.iteh.ai/catalog/standards/sist/d04c59b8-3a4e-4a0f-b8d2-1a2805c96bff/iso-iec-tr-30148-2019>

**4 Symbols and abbreviated terms**

AL	application layer
APDU	application layer protocol data unit
ASL	application sub-layer
ASLDE	application sub-layer data entity
ASLME	application sub-layer management entity
DMAP	device management application process.
GPRS	general packet radio services
ID	identifier
MIB	management information base
PDU	protocol data unit
R/R	request/response
P/S	publisher/subscriber
R/S	report source/sink
SAP	service access point
UAP	user application process
UAO	user application object
VCR	virtual communication relationship
VCR_ID	virtual communication relationship identifier

## 5 Network structure

The overall structure of the wireless gas meter networks can be divided into three levels: the underlying wireless gas meter networks, the internet/mobile networks, the data centre/application server/cloud management platform. The gateway obtains data information such as balance, valve opening and closing, and device health status, and sends to the data centre. The cloud management platform can control and manage at any time, and users query information through the application server. They are shown in Figure 1.

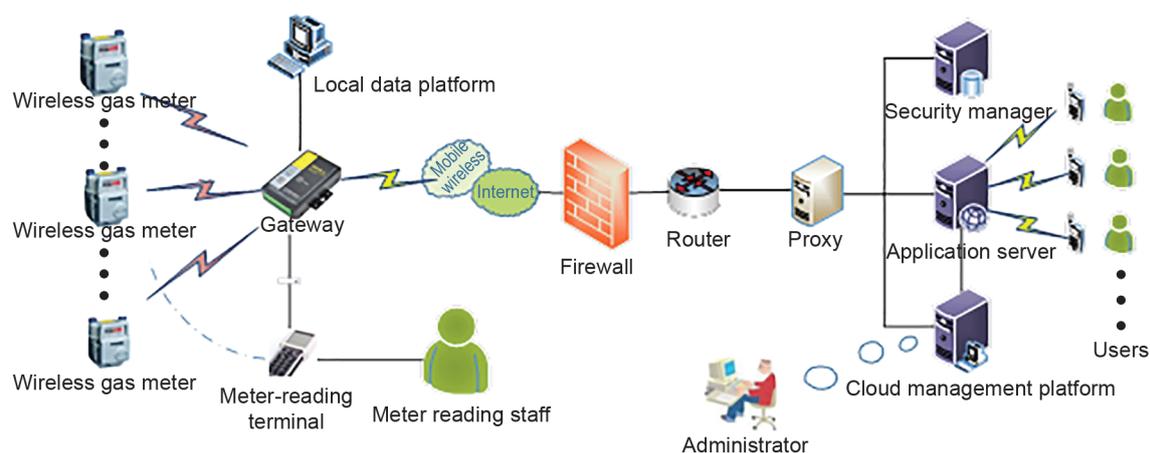

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

IEC

**Figure 1 – The structure of the wireless gas networks**

The components of the wireless gas meter networks are as follows.

a) Security manager

Application software that supervises various operational security aspects of a multi-device network (e.g. certification function), usually through interaction with wireless gas meter in the supervised device(s). See Annex A.

b) Application server

It is installed in the gas supplier or gas management centre. It is a platform for accessing the Internet and managing user applications. Users can perform business management operations such as gas meter recharging, gas meter status monitoring and gas data storage through the application.

c) Cloud management platform

It is installed in the gas supplier or gas management centre. It is a platform for controlling and managing wireless gas meters. It has functions such as equipment management, network management, network security management and time synchronization.

d) Gateway

It is installed at a place without potential explosion risks and far away from where gas is used. It is important for a gateway to be a safe distance from wireless gas meters. It can cover all gas meters to manage network nodes remotely. It can receive management and control messages from the remote management platform. The main functions are as follows: transmission and storage of wireless gas meter status information; conversion of wireless protocol to wired protocol; management of wireless gas meter; information security management for gas meter identification.

e) Wireless gas meter

Instrument intended to measure, memorize and display the quantity of gas passing the flow sensor. It is installed in locations where there are potential explosion risks and meets the explosion-proof performance functions. If it is exposed to weather it should also be weather-proof against dust and water entry and the effect of UV sunlight exposure and ambient temperature ranges expected at the installed location, if these would impair its function and safety. Wireless connections may include short distance wireless, GPRS, long range wireless and narrowband IoT.

**6 Application layer protocol**

**6.1 Overview**

**6.1.1 General**

AL describes the interaction processes and services between wireless gas meter and wireless gas meter system.

This AL for wireless gas meter networks includes:

- structure and functions;
- three communication models;
- application services and corresponding service primitives;
- message format.


iTech STANDARD PREVIEW  
(standards.itech.ai)

**6.1.2 AL function**

The AL describes UAP, ASL and DMAP. The DMAP is a special type of UAP, which is dedicated to managing the device and its communications services. DMAP can realize system management functions. AL defines application objects to interact with the wireless gas meter system. It can also define communication services to support interaction between gas meter application processes and ASL.

**6.1.3 AL structure**

Application layer structure is shown in Figure 2.

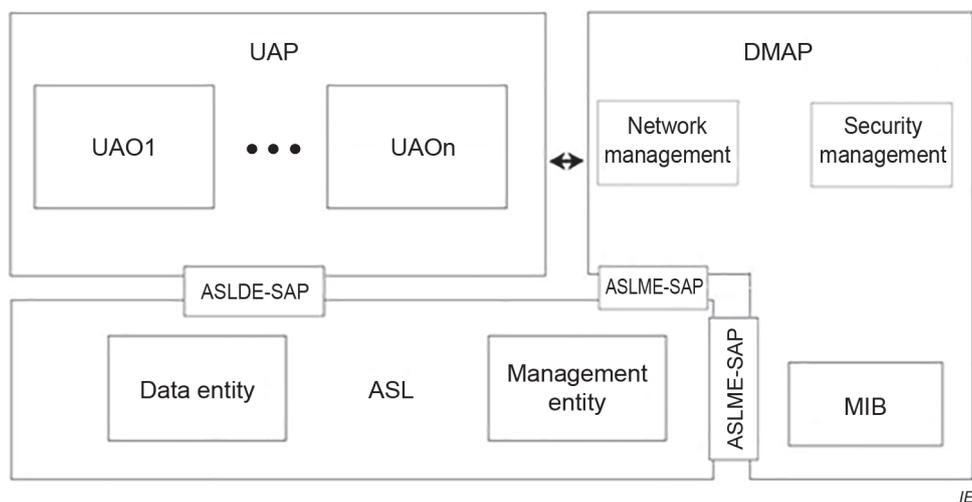

**Figure 2 – AL structure**

UAP collects data from the wireless gas meter and processes the data; UAP consists of one or more UAOs. DMAP includes the network management module, the security management module and the MIB module. The network management is responsible for managing the attributes of network equipment which is related to communication and networking processes. The security management manages the attributes associated with network security. The information in the MIB exists in the form of attributes to monitor and configure wireless network parameters for gas meters. ASL includes data entities and management entities. Data entities provide data communication services, send data to the network layer and receive data from it. The management entity implements the data interaction with the MIB. UAP and DMAP interact with AL.

ASLDE–SAP and ASLME–SAP are interfaces for communication among parts. ASL provides transparent data transmission services between ASL and UAP.

## 6.2 User application process

### 6.2.1 General

According to the ISO/OSI reference model defined, the UAP is performed for specific applications in the network and an integral part of distributed applications in wireless gas meter networks.

### 6.2.2 Functions of UAP

The functions of the user application process mainly include the following.

- It can collect gas consumption, balance and remaining power in home and industrial sites through a wireless gas meter. After processing this information, it is transmitted to the computer control centre through the data channel.
- It can generate and issue an alarm, and the UAO itself will send an alarm signal when an operating condition is abnormal. This alarm information includes data anomalies, low power and damage caused by external factors, etc.

### 6.2.3 User application object

A user process consists of one or more user application objects. Each user application object can be defined according to different functions. The user application object is defined as the data acquisition, processing and distribution.

Each user application object is addressed based on the object ID. This parameter uses index addressing when its internal parameters are operated remotely.

## 6.3 Device management application process

Each device contains a DMAP. The DMAP includes a security device management function. The DMAP cooperates with system manager and the security manager to enable the use of system resources by the wireless gas meter and the wireless gas meter system. For example, the DMAP may ask to join the network, ask for communication bandwidth, request a communication configuration, and report its health. The system manager and the security manager of the wireless gas meter authorize the wireless gas meter to join the network, allocate communication bandwidth, configure the wireless gas meter, and collect health reports. These health reports are stored in the wireless gas meter system manager and are used to make communication configuration decisions.