



SLOVENSKI STANDARD SIST EN 301 908-3:2002

01-november-2002

9`Y_fca U[bYfbUnXfi y`^j cghf9 A7L]b`nUXYj Yj`nj Ynj`n`fUX]`g_ Ja`gdY_fca`f9FAŁ!
6 UnbY`dchgU`Y`f6 GŁ]b`i dcfUVb]y`_UcdfYa Ufl 9L`nUW] bc`ca fYj`Y`A H!&\$\$\$`fYhY
[YbYfUW]Y`!` "XY.`<Ufa cb]n]fUb]9B`nU`A H!&\$\$\$ž7 8 A5`í 8]fYWiGdfYUXÎ`fK]fY`fbU
fUndfýYbcgflŁfl HF5`:`8 8 Łf6 GŁž`_]nU`Ya UV]ghj YbY`nU hYj Y``YbU` "&X]fY`hjj Y
F/ HH9

Electromagnetic compatibility and Radio spectrum Matters (ERM); Base Stations (BS) and User Equipment (UE) for IMT-2000 Third-Generation cellular networks; Part 3: Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (BS) covering essential requirements of article 3.2 of the R&TTE Directive
(standards.iteh.ai)

[SIST EN 301 908-3:2002](https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002)

<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>

Ta slovenski standard je istoveten z: EN 301 908-3 Version 1.1.1

ICS:

33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

SIST EN 301 908-3:2002

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 908-3:2002](https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002)

<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>

ETSI EN 301 908-3 V1.1.1 (2002-01)

Candidate Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Base Stations (BS) and User Equipment (UE) for
IMT-2000 Third-Generation cellular networks;
Part 3: Harmonized EN for IMT-2000,
CDMA Direct Spread (UTRA FDD) (BS)
covering essential requirements
of article 3.2 of the R&TTE Directive**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 908-3:2002](https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002)

<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>



Reference

DEN/ERM-TFES-001-3

Keywords3g, 3gpp, cellular, digital, IMT-2000, mobile,
radio, regulation, UMTS, WCDMA**ETSI**650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 908-3:2002

<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
Introduction	7
1 Scope	9
2 References	9
3 Definitions and abbreviations.....	10
3.1 Definitions	10
3.2 Abbreviations	10
4 Technical requirements specifications	11
4.1 Environmental profile.....	11
4.2 Conformance requirements	11
4.2.1 Introduction.....	11
4.2.2 Spectrum emissions mask	11
4.2.2.1 Definition	11
4.2.2.2 Limit.....	12
4.2.2.3 Conformance.....	13
4.2.3 Adjacent channel leakage ratio (ACLR).....	13
4.2.3.1 Definition	13
4.2.3.2 Limits	13
4.2.3.3 Conformance.....	13
4.2.4 Transmitter spurious emissions.....	13
4.2.4.1 Definition	13
4.2.4.2 Limits	14
4.2.4.2.1 Spurious emissions (Category B).....	14
4.2.4.2.2 Co-existence with GSM 900.....	14
4.2.4.2.3 Co-existence with DCS 1800.....	15
4.2.4.2.4 Co-existence with services in adjacent frequency bands.....	15
4.2.4.2.5 Co-existence with UTRA-TDD.....	15
4.2.4.3 Conformance.....	15
4.2.5 Base station maximum output power.....	15
4.2.5.1 Definition	15
4.2.5.2 Limit.....	15
4.2.5.3 Conformance.....	16
4.2.6 Transmit intermodulation	16
4.2.6.1 Definition	16
4.2.6.2 Limit.....	16
4.2.6.3 Conformance.....	16
4.2.7 Receiver spurious emissions	16
4.2.7.1 Definition	16
4.2.7.2 Limit.....	16
4.2.7.3 Conformance.....	16
4.2.8 Blocking characteristics	17
4.2.8.1 Definition	17
4.2.8.2 Limit.....	17
4.2.8.3 Conformance.....	17
4.2.9 Receiver intermodulation characteristics	17
4.2.9.1 Definition	17
4.2.9.2 Limit.....	17
4.2.9.3 Conformance.....	17
4.2.10 Receiver adjacent channel selectivity	18
4.2.10.1 Definition	18
4.2.10.2 Limit.....	18
4.2.10.3 Conformance.....	18

5	Testing for compliance with technical requirements.....	18
5.1	Conditions for testing.....	18
5.2	Interpretation of the measurement results	19
5.3	Essential radio test suites.....	20
5.3.1	Spectrum emission mask	20
5.3.1.1	Initial conditions	20
5.3.1.2	Procedures.....	20
5.3.2	Adjacent Channel Leakage power Ratio (ACLR)	21
5.3.2.1	Initial conditions	21
5.3.2.2	Procedure	21
5.3.3	Transmitter spurious emissions.....	21
5.3.3.1	Initial conditions	21
5.3.3.2	Procedure	21
5.3.4	Base station maximum output power.....	22
5.3.4.1	Initial conditions	22
5.3.4.2	Procedure	22
5.3.5	Transmit intermodulation	22
5.3.5.1	Initial conditions	22
5.3.5.2	Procedures.....	22
5.3.6	Receiver spurious emissions	23
5.3.6.1	Initial conditions	23
5.3.6.2	Procedure	23
5.3.7	Blocking characteristics	23
5.3.7.1	Initial conditions	23
5.3.7.2	Procedure	24
5.3.8	Receiver intermodulation characteristics	24
5.3.8.1	Initial conditions	24
5.3.8.2	Procedures.....	24
5.3.9	Adjacent Channel Selectivity (ACS)	25
5.3.9.1	Initial conditions	25
5.3.9.2	Procedure	25
SIST EN 301 908-3:2002		
Annex A (normative):	The EN Requirements Table (EN-RT)	26
Annex B (informative):	Environmental profile specification	28
Annex C (informative):	The EN title in the official languages	29
Annex D (informative):	Bibliography	30
History		31

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized EN, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

The present document is part 3 of a multi-part deliverable covering the Base Stations (BS) and User Equipment (UE) for IMT-2000 Third-Generation cellular networks, as identified below:

- SIST EN 301 908-3:2002
<https://standards.iteh.ai/catalog/standards/sist/407c0d7a-4594-41a1-9170-c7105acc2005/sist-en-301-908-3-2002>
 (standards.iteh.ai)
- Part 1: "Harmonized EN for IMT-2000, introduction and common requirements, covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 2: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 3: "Harmonized EN for IMT-2000, CDMA Direct Spread (UTRA FDD) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";**
 - Part 4: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 5: "Harmonized EN for IMT-2000, CDMA Multi-Carrier (cdma2000) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 6: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 7: "Harmonized EN for IMT-2000, CDMA TDD (UTRA TDD) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 8: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (UE) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 9: "Harmonized EN for IMT-2000, TDMA Single-Carrier (UWC 136) (BS) covering essential requirements of article 3.2 of the R&TTE Directive";
 - Part 10: "Harmonized EN for IMT-2000 FDMA/TDMA (DECT) covering essential requirements of article 3.2 of the R&TTE Directive".

Technical specifications relevant to Directive 1999/5/EC are given in annex A.

National transposition dates	
Date of adoption of this EN:	4 January 2002
Date of latest announcement of this EN (doa):	30 April 2002
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 October 2002
Date of withdrawal of any conflicting National Standard (dow):	31 October 2003

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[SIST EN 301 908-3:2002](https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002)

<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>

Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

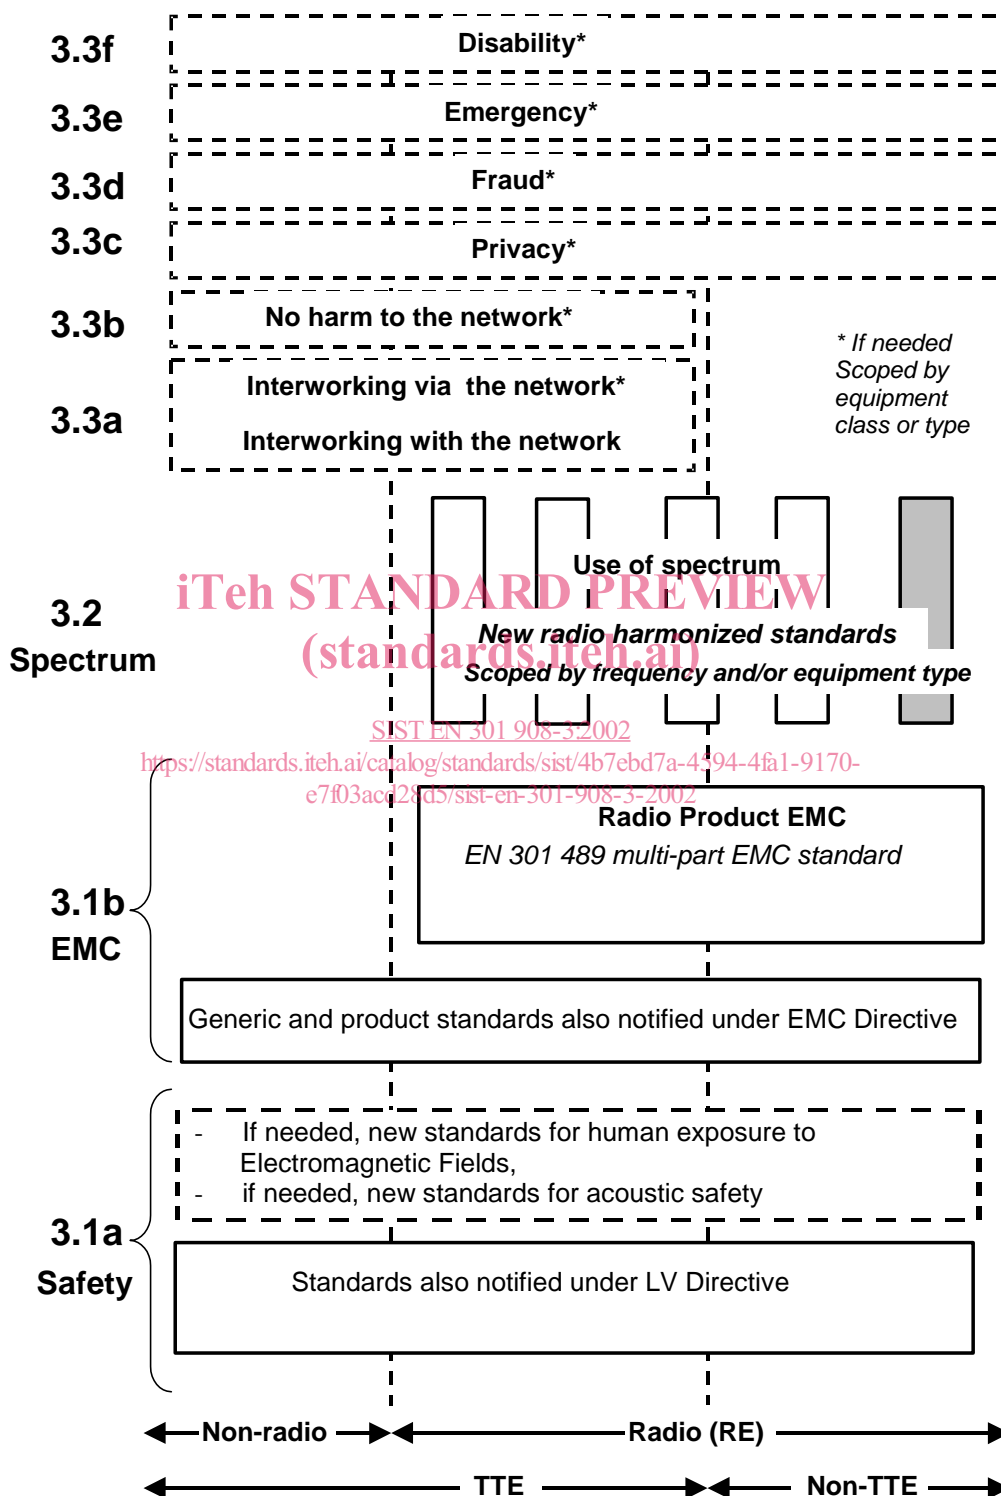


Figure 1: Modular structure for the various standards used under the R&TTE Directive

The left hand edge of the figure 1 shows the different clauses of article 3 of the R&TTE Directive [1].

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b, the diagram shows EN 301 489 [6], the multi-part product EMC standard for radio under the EMC Directive [2].

For article 3.1a, the diagram shows the existing safety standards currently used under the LV Directive [3] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of figure 1 shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive [1] is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive [1] may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
 - under article 3.2 when new frequency bands are agreed; or
 - under article 3.3 should the Commission take the necessary decision without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

The product specifications upon which all parts of EN 301 908 are based, differ in presentation; and this is reflected in the present document.

1 Scope

The present document applies to the following radio equipment type:

- Base Stations for IMT-2000 CDMA Direct Spread (UTRA FDD).

This radio equipment type is capable of operating in all or any part of the frequency bands given in table 1.

Table 1: CDMA Direct Spread base station frequency bands

Direction of transmission	CDMA Direct Spread base station frequency bands
Transmit	2 110 MHz to 2 170 MHz
Receive	1 920 MHz to 1 980 MHz

The present document is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive) article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- SIST EN 301 908-3:2002
<https://standards.iteh.ai/catalog/standards/sist/4b7ebd7a-4594-4fa1-9170-e7f03acd28d5/sist-en-301-908-3-2002>
- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
 - For a specific reference, subsequent revisions do not apply.
 - For a non-specific reference, the latest version applies.
- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.
 - [2] Council Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility.
 - [3] Council Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits.
 - [4] ETSI TR 100 028 (all parts) (V1.3.1): "Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
 - [5] ETSI TS 125 141 (V3.7.0): "Universal Mobile Telecommunications System (UMTS); Base station conformance testing (FDD) (3GPP TS 25.141 version 3.7.0 Release 1999)".
 - [6] ETSI EN 301 489 (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services".
 - [7] ITU-R Recommendation SM.329-8 (2000): "Spurious emissions".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [1], and the following apply:

chip rate: rate of "chips" (modulated symbols after spreading) per second

NOTE: The UTRA FDD chip rate is 3,84 Mchip/s.

environmental profile: range of environmental conditions under which equipment within the scope of the present document is required to comply with the provisions of the present document

output power: mean power of one carrier of the base station, delivered to a load with resistance equal to the nominal load impedance of the transmitter

rated output power: rated output power of the base station is the mean power level per carrier that the manufacturer has declared to be available at the antenna connector

maximum output power: mean power level per carrier of the base station measured at the antenna connector in a specified reference condition

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACLR	Adjacent Channel Leakage power Ratio
ACS	Adjacent Channel Selectivity
B	Appropriate frequency in the Bottom of the operating frequency band of the BS
BER	Bit Error Ratio
BS	Base Station
CDMA	Code Division Multiple Access
CW	Continuous Wave (unmodulated signal)
DCS	Digital Communication System
EMC	Electro-Magnetic Compatibility
EUT	Equipment Under Test
FDD	Frequency Division Duplexing
F _{uw}	Frequency of unwanted signal
GSM	Global System for Mobile communications
LV	Low Voltage
M	Appropriate frequency in the Middle of the operating frequency band of the BS
MS	Mobile Station
PCCPCH	Primary Common Control Physical CHannel
R&TTE	Radio and Telecommunications Terminal Equipment
RE	Radio Equipment
RF	Radio Frequency
RMS	Root Mean Square
RRC	Regional Control Center
RX	Receiver
SCCPCH	Secondary Common Control Physical CHannel
T	Appropriate frequency in the Top of the operating frequency band of the BS
TDD	Time Division Duplexing
TTE	Telecommunications Terminal Equipment
TX	Transmitter
UARFCN	UTRA Absolute Radio Frequency Channel Number
UE	User Equipment
UL	Up Link (reverse link)
UMTS	Universal Mobile Telecommunications System