

INTERNATIONAL STANDARD

NORME INTERNATIONALE

High frequency inductive components – Non-electrical characteristics and measuring methods –

Part 1: Fixed, surface mounted inductors for use in electronic and telecommunication equipment

[IEC 62025-1:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-4a409c01e620>

Composants inductifs à haute fréquence – Caractéristiques non électriques et méthodes de mesure –

Partie 1: Inductances fixes pour montage en surface utilisées dans les matériels électroniques et les équipements de télécommunications



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 14 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 55 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 14 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 55 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.



IEC 62025-1

Edition 2.0 2007-05

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**High frequency inductive components – Non-electrical characteristics and measuring methods –
Part 1: Fixed, surface mounted inductors for use in electronic and telecommunication equipment**

[IEC 62025-1:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-fd147641321c/iec-62025-1:2007>

Composants inductifs à haute fréquence – Caractéristiques non électriques et méthodes de mesure –

Partie 1: Inductances fixes pour montage en surface utilisées dans les matériels électroniques et les équipements de télécommunications

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

M

ICS 29.100.10

ISBN 978-2-8322-1334-6

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
1 Scope and object.....	5
2 Normative references	5
3 Graphical symbols and designations.....	5
3.1 Designation	5
4 Shape.....	7
5 Dimensions	8
5.1 Shape D.....	8
5.2 Shape K	9
5.3 Tolerances for outline dimensions	9
6 Ratings and characteristics	10
6.1 Nominal inductance or impedance	10
6.2 Tolerance for nominal inductance or impedance	10
6.3 Operating temperature range.....	10
7 Marking	12
8 Direction marking or shape of polarity	12
iTeh STANDARD PREVIEW	
(standards.iteh.ai)	
Bibliography.....	13
IEC 62025-1:2007	
Table 1 – Letter code for inductance value.....	6
Table 2 – Dimensions for shape D.....	8
Table 3 – Dimensions of height for shape D (R 20 series).....	8
Table 4 – Dimensions of height for shape D less than 1,00 mm	9
Table 5 – Dimensions for shape K	9
Table 6 – Tolerances for outline dimension and height.....	10
Table 7 – E 24 series for nominal inductance or impedance.....	10
Table 8 – Tolerance for nominal inductance or impedance	10
Table 9 – Temperatures to be selected for operating temperature ranges	11
Table 10 – User reference / Examples of application and operating temperature range.....	11
Figure 1 – Shapes of inductor and ferrite beads (examples).....	7

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**HIGH FREQUENCY INDUCTIVE COMPONENTS –
NON-ELECTRICAL CHARACTERISTICS AND MEASURING METHODS –****Part 1: Fixed, surface mounted inductors for use in electronic
and telecommunication equipment**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62025-1 has been prepared by IEC technical committee 51: Magnetic components and ferrite materials.

This second edition cancels and replaces the first edition published in 2002. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- nomenclature of dimensions in Figure 1 has been changed;
- a new Table 1, Letter code for inductance values, has been added;
- dimensions for shapes in Table 2 and Table 5 have been added;
- new operating temperature ratings in Table 9 have been added.

This bilingual version (2014-01) corresponds to the monolingual English version, published in 2007-05.

The text of this standard is based on the following documents:

FDIS	Report on voting
51/883/FDIS	51/889/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62025 series, published under the general title *High frequency inductive components – Non-electrical characteristics and measuring methods*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
[IEC 62025-1:2007](https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-d01c5ba4d37c/iec-62025-1-2007)
<https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-d01c5ba4d37c/iec-62025-1-2007>

HIGH FREQUENCY INDUCTIVE COMPONENTS – NON-ELECTRICAL CHARACTERISTICS AND MEASURING METHODS –

Part 1: Fixed, surface mounted inductors for use in electronic and telecommunication equipment

1 Scope and object

This part of IEC 62025 applies to fixed, surface mounted inductors and ferrite beads.

Should conflict arise between these specifications and the detail specifications, the latter will take precedence.

The object of this standard is to establish requirements for fixed, surface mounted inductors, to describe terms, to give recommendations for standard values and dimensions and to give guidance on fixed, surface mounted inductors.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61605: 2005, *Fixed inductors for use in electronic and telecommunication equipment-Marking codes* <https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-d01c5ba4d37c/iec-62025-1-2007>

3 Graphical symbols and designations

3.1 Designation

Designation of the fixed, surface mounted inductors is expressed by 12 digits. Designation of ferrite beads shall be specified in the detail specifications.

□ □ □ □ □ □ □ □ □ □ □ □
a) b) c) d) e)

a) Identification of the type of inductor:

fixed, surface mounted inductors shall be identified by the three alphabetic characters 'LCL'.

b) Indication of outline dimensions:

the outline dimensions of the surface mounted inductor shall be indicated by a four-digit number based on two significant figures for each dimension of L and W (or H). As for the dimensions of shape D, the first two digits indicate the longer side dimension L , and the last two digits indicate the shorter side dimension W , as shown in Figure 1. As for the dimensions of shape K, the first two digits indicate the outline dimension L , and the last two digits indicate the height dimension H .

c) Indication of shape:

a single alphabetic character as given in Figure 1 indicates the shape for fixed, surface mounted inductors.

The shape codes are classified by the base shape of inductors.

D: rectangular

K: square

d) Indication of nominal inductance:

Three alphanumeric characters specified in IEC 61605, Clause 4 indicate the nominal inductance value.

Table 1 – Letter code for inductance value

Inductance values	Digit and letter code
0,1 nH 0,47 nH	N10 N47
1 nH 4,7 nH	1N0 4N7
10 nH 47 nH	10N 47N
0,1 μH 0,47 μH	R10 R47
1 μH 4,7 μH	1R0 4R7
10 μH 47 μH	100 470
100 μH 470 μH	101 471
1 mH 4,7 mH	102 472
10 mH 47 mH	103 473
100 mH 470 mH	104 474
1 H 4,7 H	105 475
10 H 47 H	106 476

iTeH STANDARD PREVIEW
(standards.iteh.ai)
IEC 62025-1:2007
<https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-d01c5ba4d37c/iec-62025-1-2007>

e) Indication of tolerance for inductance:

Single alphabetic characters specified in Table 8 indicate the tolerance for the inductance value.

4 Shape

The shapes of fixed, surface mounted inductors and ferrite beads are classified as shown in the Figure 1.

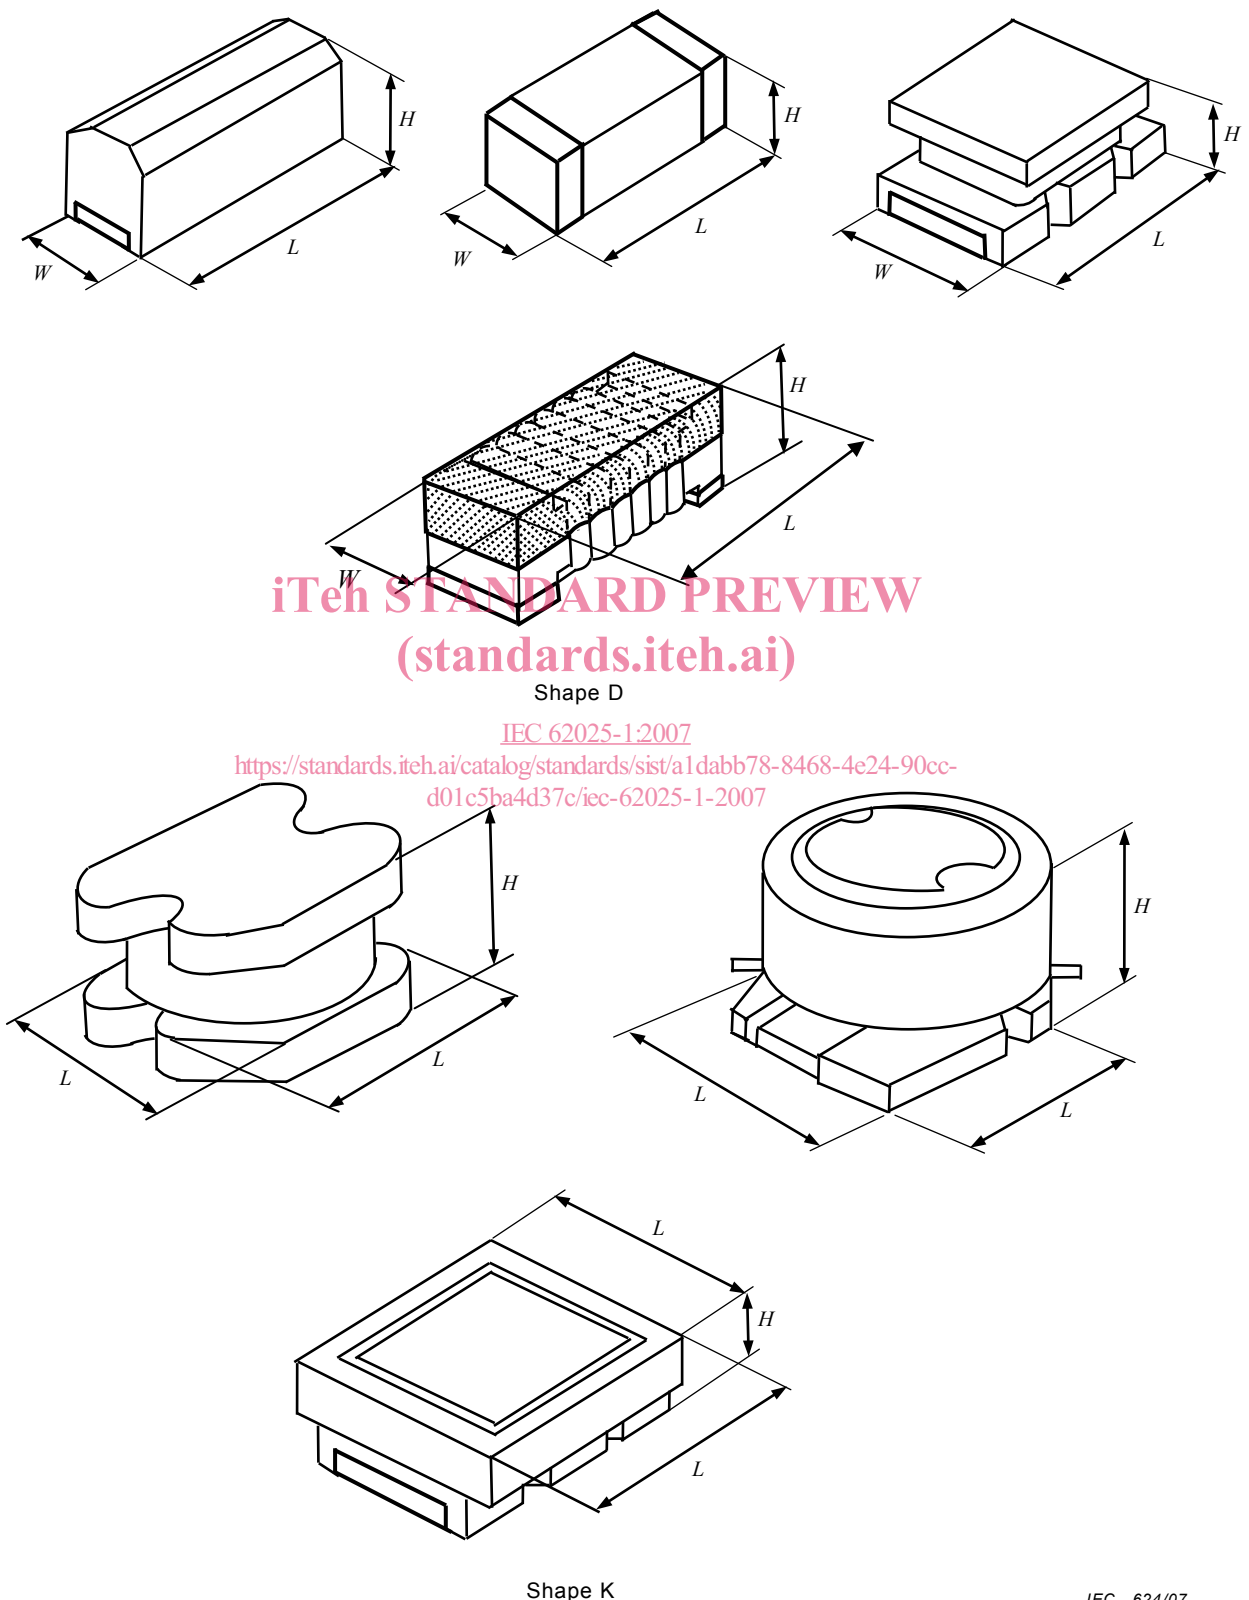


Figure 1 – Shapes of inductor and ferrite beads (examples)

5 Dimensions

5.1 Shape D

- a) Outline dimensions L (long side) and W (short side) of shape D shall be chosen from the values marked with X in Table 2. These values have been selected from the R 20 series, but the values 0,315; 0,56 and 3,15 have been rounded off to 0,3; 0,6 and 3,2 respectively. 1,25 may be rounded off to 1,2.
- b) Dimensions of height greater than 1,00 mm shall be chosen from Table 3. These values are taken from the R 20 series where, however, the values 1,12; 2,24; 3,15 and 3,55 have been rounded off to 1,1; 1,2; 2,2; 3,2 and 3,6 respectively. 1,25 may be rounded off to 1,2. Dimensions of height, smaller than 1,00 mm shall be selected from Table 4.

Table 2 – Dimensions for shape D

Dimensions in millimetres

L (long side)	W (short side)																	
	0,2	0,3	0,4	0,5	0,8	1,0	1,25 (1,2)	1,6	1,8	2,0	2,5	3,2	4,0	5,0	5,6	6,3	7,1	
0,4	X																	
0,6		X																
0,8			X															
1,0				X														
1,2						X												
1,6					X	X												
2,0						X	X											
2,5								X	X									
3,2								X	X		X							
4,0																		
4,5								X			X	X						
5,0													X					
5,6														X				
6,3															X			
7,1																X		
8,0																		X

Table 3 – Dimensions of height for shape D (R 20 series)

Dimensions in millimetres

1,0	1,1	1,25 (1,2)	1,4	1,6	1,8	2,0	2,2	2,5	2,8	3,2
3,6	4,0	4,5	5,0	5,6	6,3	7,1	8,0	9,0	10,0	

Table 4 – Dimensions of height for shape D less than 1,00 mm*Dimensions in millimetres*

0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,85	0,9
-----	-----	-----	-----	-----	-----	-----	------	-----

5.2 Shape K

Outline dimensions L and H of shape K shall be chosen from the values marked with X in Table 5. These values are based on R 20 series.

Table 5 – Dimensions for shape K*Dimensions in millimetres*

L (length)	H (height)																			
	0,6	0,8	0,9	1,0	1,1	1,2	1,4	1,6	1,8	2,0	2,2	2,5	3,2	4,0	4,5	5,0	6,3	7,1	8,0	9,0
2,5	X	X		X					X											
2,8	X	X	X	X	X															
3,2				X		X	X	X												
3,6										X										
4,0				X		X	X	X	X	X	X									
4,5													X							
5,0							X	X	X	X	X			X	X					
5,6									X								X			
6,3																		X		
7,1																			X	
8,0														X						X
9,0																				X
10,0														X		X				
12,0																X				

5.3 Tolerances for outline dimensions

Tolerances for outline dimension and height shall be selected from Table 6.

Table 6 – Tolerances for outline dimension and height

Outline dimensions (X) mm	Tolerances mm	
	Standard	Maximum
$X \leq 0,6$	$\pm 0,05$	$\pm 0,10$
$0,6 < X \leq 1,0$	$\pm 0,10$	$\pm 0,20$
$1,0 < X \leq 1,6$	$\pm 0,15$	$\pm 0,30$
$1,6 < X \leq 2,5$	$\pm 0,20$	$\pm 0,40$
$2,5 < X \leq 4,0$	$\pm 0,30$	$\pm 0,60$
$4,0 < X \leq 8,0$	$\pm 0,40$	$\pm 0,80$
$8,0 < X \leq 10,0$	$\pm 0,50$	$\pm 1,00$

6 Ratings and characteristics

6.1 Nominal inductance or impedance

The preferred values of nominal inductance or impedance shall be selected from the numeric values of the E 24 series in Table 7 and their decimal multiples or submultiples.

The detail specification sheet should clearly note whether the value given is inductance or impedance, as well as the units and measuring frequency. The choice of specifying either inductance or impedance depends on the intended application for the inductor.

<https://standards.iteh.ai/catalog/standards/sist/a1dabb78-8468-4e24-90cc-1e554c000000/iec-62025-1-2007>
Table 7 – E 24 series for nominal inductance or impedance

1,0	1,1	1,2	1,3	1,5	1,6	1,8	2,0	2,2	2,4	2,7	3,0
3,3	3,6	3,9	4,3	4,7	5,1	5,6	6,2	6,8	7,5	8,2	9,1

6.2 Tolerance for nominal inductance or impedance

The tolerance for nominal inductance or impedance shall be selected from Table 8 which includes the tolerances specified in 4.1 of IEC 61605.

Table 8 – Tolerance for nominal inductance or impedance

Tolerance	$\pm 0,05$ nH	$\pm 0,1$ nH	$\pm 0,2$ nH	$\pm 0,3$ nH	$\pm 0,5$ nH	± 1 %	± 2 %	± 3 %	± 5 %	± 10 %	± 15 %	± 20 %	± 25 %	± 30 %
Letter code	W	B	C	S	D	F	G	H	J	K	L	M	-	N

NOTE 1 nH should be applied to inductance only.
 NOTE 2 ± 25 % should be applied to impedance only.

6.3 Operating temperature range

The operating temperature range shall be selected from a lower temperature and a higher temperature in Table 9.