

9`Y\_fca U[ bYfbUnXfi y`^j cghfØ A7L]b`nUXYj Yj`nj Yn]`n`fUX]`g\_ ja`gdY\_fca`fØFAŁ  
Ěü]fc\_cdUgcj b]dfYbcgb]g]ghYa ]ĚCdfYa UnUdfYbcg`dcXUh\_cj ž\_]XYi`^j  
ZY\_j Yb bYa`dUgi`&ž` ; <n`GA`]b`i dcfUV`Uy]fc\_cdUgcj bYa cXi`UM]`g\_YhM b]\_YĚ  
<Ufa cb]n]fUb]9Bž\_]`nUYa UV]ghj YbY`nU h]j Y``YbU` "&X]fY\_hj YF/ HH9

Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive

**(standards.iteh.ai)**

[SIST EN 300 328 V1.5.1:2005](https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005>

**Ta slovenski standard je istoveten z: EN 300 328 Version 1.5.1**

**ICS:**

33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

**SIST EN 300 328 V1.5.1:2005**                      **en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 300 328 V1.5.1:2005

<https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005>

# ETSI EN 300 328 V1.5.1 (2004-08)

---

*Candidate Harmonized European Standard (Telecommunications series)*

**Electromagnetic compatibility  
and Radio spectrum Matters (ERM);  
Wideband transmission systems;  
Data transmission equipment operating  
in the 2,4 GHz ISM band and  
using wide band modulation techniques;  
Harmonized EN covering essential requirements  
under article 3.2 of the R&TTE Directive**

---

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST EN 300 328 V1.5.1:2005](https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005)

<https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005>



---

Reference

REN/ERM-TG11-005

---

Keywords

data, ISM, LAN, mobile, radio, regulation, spread spectrum, SRD, testing, transmission, UHF

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 300 328 V1.5.1:2005

<https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9f77/sist-en-300-328-v1-5-1-2005>

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.  
All rights reserved.

**DECT™**, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON™** and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

# Contents

Intellectual Property Rights .....	5
Foreword.....	5
Introduction .....	6
1 Scope .....	8
2 References .....	8
3 Definitions, symbols and abbreviations .....	9
3.1 Definitions .....	9
3.2 Symbols.....	10
3.3 Abbreviations .....	10
4 Technical specifications .....	10
4.1 Environmental profile.....	10
4.2 Modulation .....	11
4.2.1 FHSS modulation.....	11
4.2.2 DSSS and other forms of modulation .....	11
4.3 Technical requirements .....	11
4.3.1 Effective radiated power .....	11
4.3.1.1 Definition .....	11
4.3.1.2 Limit.....	11
4.3.2 Maximum spectral power density.....	11
4.3.2.1 Definition .....	11
4.3.2.2 Limit.....	11
4.3.3 Frequency range.....	12
4.3.3.1 Definition .....	12
4.3.3.2 Limit.....	12
4.3.4 Transmitter spurious emissions.....	12
4.3.4.1 Definition .....	12
4.3.4.2 Limit.....	12
4.3.5 Receiver spurious emissions .....	13
4.3.5.1 Definition .....	13
4.3.5.2 Limit.....	13
5 Essential radio test suites.....	13
5.1 Product information.....	13
5.2 Requirements for the test modulation.....	14
5.3 Test conditions, power supply and ambient temperatures .....	14
5.3.1 Normal and extreme test conditions.....	14
5.3.2 Power sources .....	14
5.3.2.1 Power sources for stand-alone equipment.....	14
5.3.2.2 Power sources for plug-in radio devices .....	14
5.3.3 Normal test conditions .....	14
5.3.3.1 Normal temperature and humidity .....	14
5.3.3.2 Normal power source .....	15
5.3.3.2.1 Mains voltage .....	15
5.3.3.2.2 Lead-acid battery power sources used on vehicles .....	15
5.3.3.2.3 Other power sources .....	15
5.3.4 Extreme test conditions.....	15
5.3.4.1 Extreme temperatures.....	15
5.3.4.2 Extreme power source voltages.....	15
5.3.4.2.1 Mains voltage .....	15
5.3.4.2.2 Lead-acid battery power sources used on vehicles .....	16
5.3.4.2.3 Power sources using other types of batteries .....	16
5.3.4.2.4 Other power sources .....	16
5.3.4.3 Procedure for tests at extreme temperatures.....	16
5.4 Choice of equipment for test suites .....	16

5.4.1	Choice of model.....	16
5.4.2	Presentation.....	17
5.4.3	Choice of operating frequencies .....	17
5.5	Testing of host connected equipment and plug-in radio devices.....	17
5.5.1	The use of a host or test jig for testing Plug-In radio devices.....	17
5.5.2	Testing of combinations.....	17
5.5.2.1	Alternative A: General approach for combinations.....	17
5.5.2.2	Alternative B: For host equipment with a plug-in radio device .....	17
5.5.2.3	Alternative C: For combined equipment with a plug-in radio device .....	18
5.5.2.4	Alternative D: For equipment with multiple radios .....	18
5.6	Interpretation of the measurement results .....	18
5.7	Test procedures for essential radio test suites.....	18
5.7.1	General.....	18
5.7.2	Effective radiated power .....	19
5.7.2.1	Radiated measurements.....	19
5.7.2.2	Conducted measurements.....	19
5.7.3	Maximum spectral power density .....	20
5.7.4	Frequency range.....	21
5.7.4.1	Frequency range of equipment using FHSS modulation.....	21
5.7.4.2	Frequency range of equipment using other forms of modulation.....	22
5.7.5	Transmitter spurious emissions.....	23
5.7.6	Receiver spurious emissions .....	24
<b>Annex A (normative): The EN Requirements Table (EN-RT) .....</b>		<b>26</b>
<b>Annex B (normative): Test sites and arrangements for radiated measurements.....</b>		<b>27</b>
B.1	Test sites.....	27
B.1.1	Open air test sites .....	27
B.1.2	Anechoic chamber .....	28
B.1.2.1	General.....	28
B.1.2.2	Description.....	28
B.1.2.3	Influence of parasitic reflections.....	28
B.1.2.4	Calibration and mode of use .....	29
B.2	Test antenna.....	30
B.3	Substitution antenna .....	31
<b>Annex C (normative): General description of measurement .....</b>		<b>32</b>
C.1	Conducted measurements and use of test fixture .....	32
C.2	Radiated measurements.....	32
C.3	Substitution measurement .....	33
<b>Annex D (informative): Bibliography .....</b>		<b>35</b>
<b>Annex E (informative): The EN title in the official languages .....</b>		<b>36</b>
History .....		37

iTech STANDARD PREVIEW

(standards.iteh.ai)

SIST EN 300 328 V1.5.1:2005

<https://standards.iteh.ai/catalog/standards/sist/7b5fe96e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005>

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Candidate Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC [5] (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive [1]").

Technical specifications relevant to Directive 1999/5/EC [1] are given in annex A.

SIST EN 300 328 V1.5.1:2005

<https://standards.iteh.ai/catalog/standards/sist/7b5fd6e-263c-4bb3-b3d6-3f5be73a9b71/sist-en-300-328-v1-5-1-2005>

### National transposition dates

Date of adoption of this EN:	30 July 2004
Date of latest announcement of this EN (doa):	31 October 2004
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 April 2005
Date of withdrawal of any conflicting National Standard (dow):	30 April 2006

## Introduction

The present document is part of a set of standards designed to fit in a modular structure to cover all radio and telecommunications terminal equipment under the R&TTE Directive [1]. Each standard is a module in the structure. The modular structure is shown in figure 1.

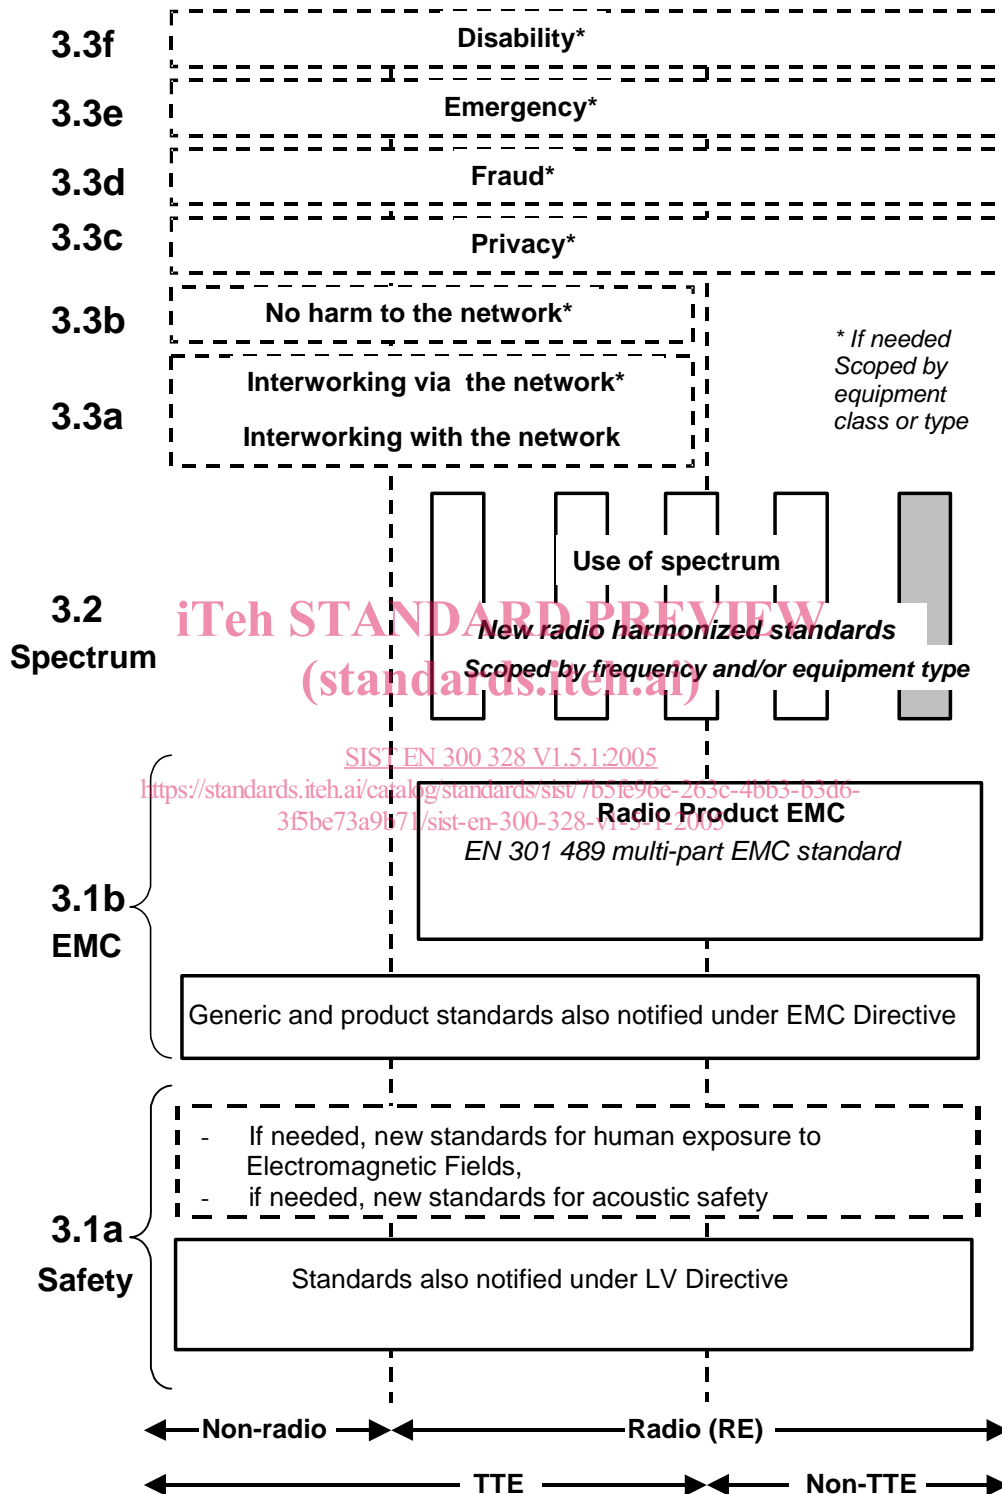


Figure 1: Modular structure for the various standards used under the R&TTE Directive



The left hand edge of the figure 1 shows the different clauses of article 3 of the R&TTE Directive [1].

For article 3.3 various horizontal boxes are shown. Dotted lines indicate that at the time of publication of the present document essential requirements in these areas have to be adopted by the Commission. If such essential requirements are adopted, and as far and as long as they are applicable, they will justify individual standards whose scope is likely to be specified by function or interface type.

The vertical boxes show the standards under article 3.2 for the use of the radio spectrum by radio equipment. The scopes of these standards are specified either by frequency (normally in the case where frequency bands are harmonized) or by radio equipment type.

For article 3.1b the figure shows EN 301 489, the multi-part product EMC standard for radio used under the EMC Directive [2].

For article 3.1a figure 1 shows the existing safety standards currently used under the LV Directive [3] and new standards covering human exposure to electromagnetic fields. New standards covering acoustic safety may also be required.

The bottom of the figure shows the relationship of the standards to radio equipment and telecommunications terminal equipment. A particular equipment may be radio equipment, telecommunications terminal equipment or both. A radio spectrum standard will apply if it is radio equipment. An article 3.3 standard will apply as well only if the relevant essential requirement under the R&TTE Directive [1] is adopted by the Commission and if the equipment in question is covered by the scope of the corresponding standard. Thus, depending on the nature of the equipment, the essential requirements under the R&TTE Directive [1] may be covered in a set of standards.

The modularity principle has been taken because:

- it minimizes the number of standards needed. Because equipment may, in fact, have multiple interfaces and functions it is not practicable to produce a single standard for each possible combination of functions that may occur in an equipment;
- it provides scope for standards to be added:
  - under article 3.2 when new frequency bands are agreed; or
  - under article 3.3 should the Commission take the necessary decisions without requiring alteration of standards that are already published;
- it clarifies, simplifies and promotes the usage of Harmonized Standards as the relevant means of conformity assessment.

# 1 Scope

The present document applies to the following transceivers, transmitters and receivers including IEEE 802.11 (see bibliography), HomeRF™ and Bluetooth™ wireless technologies.

Fixed, mobile or portable applications, e.g.:

- stand-alone radio equipment with or without their own control provisions;
- plug-in radio devices intended for use with or within a variety of host systems, e.g. personal computers, hand-held terminals, etc.;
- plug-in radio devices intended for use within combined equipment, e.g. cable modems, set-top boxes, access points, etc.;
- combined equipment or a combination of a plug-in radio device and a specific type of host equipment.

The present document applies to equipment which utilizes wideband radio modulation techniques and which has an effective radiated power of up to -10 dBW (100 mW) and a power density of up to -10 dBW (100 mW) e.i.r.p. per 100 kHz for frequency hopping spread spectrum modulation or a power density of up to -20 dBW (10 mW) e.i.r.p. per 1 MHz for other forms of modulation.

This radio equipment is capable of operating in all or any part of the frequency band shown in table 1.

**Table 1: Industrial, Scientific and Medical (ISM) frequency band**

Direction of transmission	Industrial, Scientific and Medical (ISM) frequency band
Transmit/Receive	2,4 GHz to 2,4835 GHz

The present document is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive) article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

- [2] Directive 89/336/EEC of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive).
- [3] Directive 73/23/EEC of 19 February 1973 on the harmonization of the laws of the Member States relating to electrical equipment designed for use within certain voltage limits (LV Directive).
- [4] ETSI TR 100 028-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1".
- [5] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [6] ETSI EN 301 489 (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services".

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [1] and the following apply:

**chip:** unit of modulation used in direct sequence spread spectrum modulation

**chip rate:** number of chips per second

**chip sequence:** sequence of chips with defined length and defined chip polarities

**combined equipment:** any combination of non-radio equipment that requires a plug-in radio device to offer full functionality

**direct sequence spread spectrum modulation:** form of modulation where a combination of data to be transmitted and a known code sequence (chip sequence) is used to directly modulate a carrier, e.g. by phase shift keying

NOTE: The transmitted bandwidth is determined by the chip rate and the modulation scheme.

**environmental profile:** range of environmental conditions under which equipment within the scope of EN 300 328 is required to comply with the provisions of EN 300 328

**fixed station:** equipment intended for use in a fixed location and fitted with one or more antennae

NOTE: The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**frequency hopping spread spectrum modulation:** spread spectrum technique in which the transmitter signal occupies a number of frequencies in time, each for some period of time, referred to as the dwell time

NOTE: Transmitter and receiver follow the same frequency hop pattern. The frequency range is determined by the lowest and highest hop positions and the bandwidth per hop position.

**frequency range:** range of operating frequencies over which the equipment can be adjusted

**hand-portable station:** equipment normally used on a stand-alone basis and to be carried by a person or held in the hand

NOTE: The equipment may be fitted with one or more antennae. The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**host:** host equipment is any equipment which has complete user functionality when not connected to the radio equipment part and to which the radio equipment part provides additional functionality and to which connection is necessary for the radio equipment part to offer functionality

**integral antenna:** antenna designed to be connected to the equipment without the use of a standard connector and considered to be part of the equipment

NOTE: An integral antenna may be fitted internally or externally to the equipment.

**mobile station:** equipment normally used in a vehicle or as a transportable station

NOTE: The equipment may be fitted with one or more antennae. The equipment may be fitted with either antenna socket(s) or integral antenna(e) or both.

**multi-radio equipment:** radio, host or combined equipment using more than one radio transceiver

**operating frequency:** nominal frequency at which the equipment can be operated; this is also referred to as the operating centre frequency

NOTE: Equipment may be adjustable for operation at more than one operating frequency.

**plug-in radio device:** radio equipment module intended to be used with or within host, combined or multi-radio equipment, using their control functions and power supply

**power envelope:** frequency/power contour within which the useful RF power is generated

**spread spectrum modulation:** modulation technique in which the energy of a transmitted signal is spread throughout a relatively large portion of the frequency spectrum

**stand-alone radio equipment:** equipment that is intended primarily as communications equipment and that is normally used on a stand-alone basis

**wide band modulation:** wide band modulation is considered to include FHSS or DSSS modulation as well as other forms of modulation that meet the emission requirements as defined in EN 300 328

## 3.2 Symbols

For the purposes of the present document, the following abbreviations apply:

dBm	dB relative to 1 milliwatt
dBW	dB relative to 1 Watt

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

DSSS	Direct Sequence Spread Spectrum
e.i.r.p.	equivalent isotropically radiated power
EMC	Electro-Magnetic Compatibility
FHSS	Frequency Hopping Spread Spectrum
ISM	Industrial, Scientific and Medical
LV	Low Voltage
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

# 4 Technical specifications

## 4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be determined by the environmental class of the equipment. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the required operational environmental profile.