

INTERNATIONAL STANDARD



Information technology – Telecommunications bonding networks for buildings
and other structures

(standards.iteh.ai)

ISO/IEC 30129:2015

<https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2015 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

IEC STANDARD PREVIEW
(standards) (ch) (ie)

ISO/IEC 30129:2015
<https://standards.iteh.ai/catalog/standards/iec/30129-2015>
c746c3a27396/iso-iec-30129-2015

INTERNATIONAL STANDARD



Information technology – Telecommunications bonding networks for buildings
and other structures **STANDARD PREVIEW**
(standards.iteh.ai)

ISO/IEC 30129:2015

<https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-2924-8

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	6
1 Scope.....	8
2 Normative references	8
3 Terms, definitions and abbreviations	9
3.1 Terms and definitions.....	9
3.2 Abbreviations	11
4 Conformance.....	12
5 Overview of bonding networks	12
6 Selection of the telecommunications bonding network approach.....	13
6.1 Assessment of the impact of the telecommunications bonding network on the interconnection of telecommunications equipment	13
6.2 Telecommunications bonding networks	14
6.3 Telecommunications bonding network performance	15
6.3.1 General	15
6.3.2 Requirements	16
6.3.3 DC resistance measurements	17
7 Common features.....	17
7.1 General.....	17
7.2 Protective bonding networks	18
7.2.1 Protective bonding network conductors (PBNCs)	18
7.2.2 Main earthing terminal (MET)	18
7.3 Telecommunications entrance facility (TEF)	18
7.4 Telecommunications bonding network components	18
7.4.1 Telecommunications bonding network conductors	18
7.4.2 Telecommunications bonding network connections	19
7.5 Cabinets, frames and racks.....	19
7.5.1 External connections to a bonding network	19
7.5.2 Rack bonding conductors.....	20
7.5.3 Internal connections	21
7.6 Miscellaneous bonding connections	22
7.6.1 General	22
7.6.2 Bonding conductors for d.c. resistance control.....	22
7.6.3 Bonding conductors for impedance control	22
7.7 Documentation.....	23
8 Dedicated telecommunications bonding network.....	23
8.1 General.....	23
8.2 Components	24
8.2.1 Primary bonding busbar (PBB).....	24
8.2.2 Secondary bonding busbar (SBB)	25
8.2.3 Bonding conductors for d.c. resistance control.....	25
8.2.4 Bonding conductors for impedance control	26
8.3 Implementation	27
8.3.1 Primary bonding busbar (PBB).....	27
8.3.2 Secondary bonding busbar (SBB)	28

8.3.3	Telecommunications bonding conductor (TBC)	28
8.3.4	Telecommunications bonding backbone (TBB).....	29
8.3.5	Backbone bonding conductor (BBC)	29
8.3.6	Bonds to continuous conductive pathway systems	29
8.3.7	Bonds to structural metal	29
9	Local telecommunications bonding networks in conjunction with protective bonding networks	30
9.1	Bonding for local distribution	30
9.1.1	Star protective bonding networks	30
9.1.2	Ring protective bonding networks	31
9.2	Telecommunications bonding conductors	32
9.2.1	Bonding conductors for d.c. resistance control.....	32
9.2.2	Bonding conductors for impedance control	32
9.3	Bonding for areas of telecommunications equipment concentration	33
10	Local telecommunications bonding networks in conjunction with dedicated telecommunications bonding networks.....	33
10.1	Bonding for areas of telecommunications equipment concentration	33
10.1.1	Requirements	33
10.1.2	Recommendations	33
10.1.3	Cabinets, frames and racks	33
10.2	Telecommunications equipment bonding conductors (TEBC)	33
10.2.1	TEBC for d.c. resistance control.....	33
10.2.2	TEBC for impedance control.....	34
10.2.3	Implementation	34
11	Mesh bonded networks.....	34
11.1	General.....	34
11.2	Mesh bonding alternatives	35
11.2.1	Local mesh bonding (MESH-IBN) networks.....	35
11.2.2	MESH-BN	37
11.3	Bonding conductors of a mesh bonding network.....	38
11.3.1	Requirements	38
11.3.2	Recommendations	38
11.4	Bonding conductors to the mesh bonding network.....	38
11.5	Supplementary bonding grid (SBG).....	39
11.6	System reference potential plane (SRPP)	39
11.6.1	General	39
11.6.2	Access floors	40
11.6.3	Transient suppression plate (TSP).....	41
Annex A (normative) Maintenance of telecommunications bonding network performance		42
A.1	General.....	42
A.2	Periodic activity	42
A.2.1	Schedule	42
A.2.2	Implementation	42
A.3	Causes of performance deterioration	43
A.3.1	Galvanic corrosion.....	43
A.3.2	Requirements	43
Annex B (normative) Bonding conductor cross-sectional area		44
Annex C (informative) Alternative terminology.....		45

Bibliography.....	46
Figure 1 – Schematic relationship between ISO/IEC 30129 and other relevant standards.....	7
Figure 2 – Schematic of telecommunications equipment distribution and associated bonding connections	13
Figure 3 – Example of three methods of equipment and rack bonding	20
Figure 4 – Example of a bond connection from a cabinet to the cabinet door	22
Figure 5 – Example of bonding straps	23
Figure 6 – Illustrative example of a large building	24
Figure 7 – Illustrative example of a smaller building	24
Figure 8 – Schematic of PBB	25
Figure 9 – Schematic of SBB	25
Figure 10 – Star protective bonding and supplementary telecommunications bonding	30
Figure 11 – Example of high common impedance and large loop	30
Figure 12 – Example of low common impedance and small loop	31
Figure 13 – Ring protective bonding and supplementary telecommunications bonding	31
Figure 14 – MESH-BN example	32
Figure 15 – Example TEBC to rack bonding conductor connection	34
Figure 16 – Local mesh bonding network	36
Figure 17 – A MESH-IBN having a single point of connection (SPC)	36
Figure 18 – A MESH-BN with equipment cabinets, frames, racks and CBN bonded together	37
Figure 19 – Example of access floor	40
Figure 20 – Example of installation details for an under floor transient suppression plate	41
Table 1 – Sensitivity of cabling media to bonding network performance	14
Table 2 – Telecommunications bonding network requirements	14
Table 3 – DC resistance requirements for protective bonding networks.....	16
Table 4 – DC resistance requirements for dedicated telecommunications bonding networks	17
Table 5 – TBB conductor sizing	26
Table B.1 – Bonding conductor cross-sectional areas	44
Table C.1 – Alternative terminology	45

INFORMATION TECHNOLOGY –

TELECOMMUNICATIONS BONDING NETWORKS FOR BUILDINGS AND OTHER STRUCTURES

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 30129 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This International Standard specifies requirements and recommendations for the design and installation of connections (bonds) between various electrically conductive elements in buildings and other structures, during their construction or refurbishment, in which information technology (IT) and, more generally, telecommunications equipment is intended to be installed in order to

- a) minimise the risk to the correct function of that equipment and interconnecting cabling from electrical hazards,
- b) provide the telecommunications installation with a reliable signal reference – which may improve immunity from electromagnetic interference (EMI).

This International Standard

- specifies assessment criteria to determine the relevant bonding configurations that are appropriate,
- enables the implementation of any bonding configurations that may be necessary by means of either
 - the provision of a bonding network that utilises the existing protective bonding network for electrical safety, or
 - the provision of a dedicated bonding network for the telecommunications infrastructure.


This standard is intended for

- building architects, owners and managers,
- designers and installers of electrical and telecommunications cabling installations.

This International Standard is one of a number of documents prepared in support of international standards and technical reports for cabling design produced by ISO/IEC JTC 1/SC 25. Figure 1 shows the inter-relationship between these standards and technical reports.

Users of this standard should be familiar with all applicable cabling design and installation standards.

NOTE Telecommunications infrastructure affects raw material consumption. The infrastructure design and installation methods also influence product life and sustainability of electronic equipment life cycling. These aspects of telecommunications infrastructure impact our environment. Since building life cycles are typically planned for decades, technological electronic equipment upgrades are necessary. The telecommunications infrastructure design and installation process magnifies the need for sustainable infrastructures with respect to building life, electronic equipment life cycling and considerations of effects on environmental waste. Telecommunications designers are encouraged to research local building practices for a sustainable environment and conservation of fossil fuels as part of the design process.

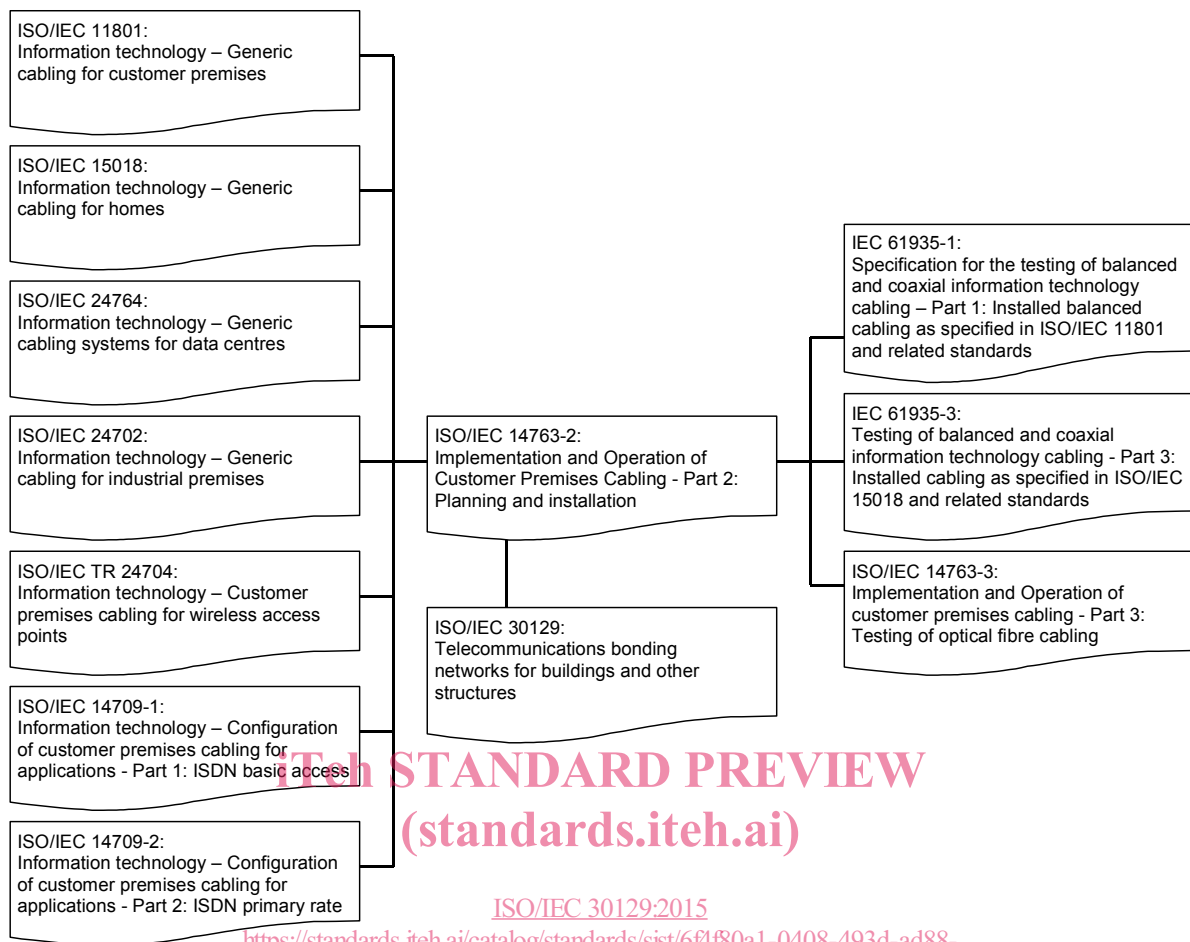

STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>

<https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>

IEC

Figure 1 – Schematic relationship between ISO/IEC 30129 and other relevant standards

INFORMATION TECHNOLOGY –

TELECOMMUNICATIONS BONDING NETWORKS FOR BUILDINGS AND OTHER STRUCTURES

1 Scope

This International Standard specifies requirements and recommendations for the design and installation of connections (bonds) between various electrically conductive elements in buildings and other structures, during their construction or refurbishment, in which information technology (IT) and, more generally, telecommunications equipment is intended to be installed in order to

- a) minimise the risk to the correct function of that equipment and interconnecting cabling from electrical hazards,
- b) provide the telecommunications installation with a reliable signal reference – which may improve immunity from electromagnetic interference (EMI).

The requirements of this International Standard are applicable to the buildings and other structures within premises addressed by ISO/IEC 14763-2 (e.g. residential, office, industrial and data centres) but information given in this International Standard may be of assistance for other types of buildings and structures.

NOTE Telecommunications centres (operator buildings) are addressed by ITU-T K.27.

This International Standard does not apply to power supply distribution of voltages over AC 1 000 V.

Electromagnetic compatibility (EMC) requirements and safety requirements for power supply installation are outside the scope of this International Standard and are covered by other standards and regulations. However, information given in this International Standard may be of assistance in meeting the requirements of these standards and regulations.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60364-4-41, *Low-voltage electrical installations – Part 4-41: Protection for safety – Protection against electric shock*

IEC 60364-4-44:2007, *Low-voltage electrical installations – Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances*

IEC 60364-5-54, *Low-voltage electrical installations – Part 5-54: Selection and erection of electrical equipment – Earthing arrangements and protective conductors*

IEC 60950-1, *Information technology equipment – Safety – Part 1: General requirements*

IEC 61140, *Protection against electric shock – Common aspects for installation and equipment*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document the following definitions apply in addition to those of ISO/IEC 14763-2. Alternatives to certain terms are provided in Annex C.

3.1.1

access provider

operator or another entity providing the means to enable external telecommunications services provision to a subscriber

3.1.2

asymmetric cabling

cabling within which the cable elements are asymmetric (unbalanced)

3.1.3

application

system, including its associated transmission method, which is supported by telecommunications cabling

[SOURCE: ISO/IEC 11801:2002, 3.1.2]

3.1.4

backbone bonding conductor

telecommunications bonding connection which interconnects telecommunications bonding backbones

3.1.5

balanced application

application designed and optimized to operate over symmetric cabling

3.1.6

common bonding network

set of interconnected conductive structures that combine the functions of a protective bonding network and a telecommunications bonding network

3.1.7

equipment bonding conductor

conductor that connects a protective bonding network to an item of telecommunications equipment

3.1.8

main earthing terminal

terminal or busbar which is part of the earthing arrangement of an installation and enabling the electric connection of a number of conductors for earthing purposes

[SOURCE: IEC 60050-826:2004, 826-13-15, modified – The terms "main earthing busbar main", "grounding terminal (US)" and "main grounding busbar (US)" have been deleted.]

3.1.9

mesh isolated bonding network

mesh bonding network with a single point of connection to either the protective bonding network or another isolated bonding network

**3.1.10
mesh size**

maximum length of conducting material between two adjacent connection points that create the grid of the telecommunications bonding network

**3.1.11
primary bonding busbar**

telecommunications bonding connection element, connected to the main earthing terminal, that is used to attach telecommunications bonding backbone conductors and equipment bonding conductors

**3.1.12
protective bonding network**

set of interconnected conductive elements to ensure electrical safety

Note 1 to entry: The protective bonding network meets the protective equipotential bonding system as defined in IEC 60050-195:1998, 195-02-23.

**3.1.13
rack bonding conductor**

conductor that connects a rack bonding busbar or items of equipment within a cabinet, frame or rack to the telecommunications bonding network within a local area

**3.1.14
rack bonding busbar**

attachment element within a cabinet, frame or rack or for multiple unit bonding conductors

**3.1.15
secondary bonding busbar**

telecommunications bonding connection element for telecommunications systems and equipment in the area, served by a distributor

**3.1.16
system block**

functional group of equipment depending in its operation and performance on its connection to the same system reference potential plane, inherent to a mesh bonding network

**3.1.17
system reference potential plane**

conductive solid plane, as an ideal goal in potential equalizing, that is approached in practice by horizontal or vertical meshes

Note 1 to entry: The mesh width thereof is adapted to the frequency range to be considered. Horizontal and vertical meshes may be interconnected to form a grid structure approximating a Faraday cage.

Note 2 to entry: The SRPP facilitates signalling with reference to a common potential.

**3.1.18
symmetric cabling**

screened or unshielded cabling within which the cable elements comprise balanced pairs or quads

EXAMPLE Twisted pairs or quads.

**3.1.19
telecommunications bonding backbone**

conductor installed within telecommunications pathways that interconnects a primary bonding busbar to its secondary bonding busbars within the building, and that is intended to minimise potential differences but not intended to serve as a conductor providing a fault current return path

3.1.20

telecommunications bonding conductor

conductor between the primary bonding busbar and the main earthing terminal

3.1.21

telecommunications bonding network

set of interconnected conductive elements that provide functional equipotential bonding for telecommunications equipment

3.1.22

telecommunications equipment bonding conductor

conductor that connects a primary or secondary bonding busbar to a supplementary bonding network, a rack bonding conductor or to an item of telecommunications equipment

3.1.23

telecommunications entrance facility

entrance point where the telecommunications facilities enter the building

Note 1 to entry: The telecommunications entrance facility may also include antenna cable entrances and electronic equipment serving telecommunications functions.

3.1.24

unbalanced application

application not optimised for transmission over symmetric cabling

3.1.25

unit bonding conductor

conductor that connects the telecommunications equipment within a cabinet, frame or rack to the rack bonding busbar or to a rack bonding conductor

3.2 Abbreviations

a.c.	alternating current
BBC	Backbone Bonding Conductor
CBN	Common Bonding Network
d.c.	direct current
EMI	ElectroMagnetic Interference
IACS	International Annealed Copper Standard
MESH-BN	MESH Bonding Network
MESH-IBN	MESH Isolated Bonding Network
MET	Main Earthing Terminal
PBB	Primary Bonding Busbar
PBNC	Protective Bonding Network Conductor
RBB	Rack Bonding Busbar
RBC	Rack Bonding Conductor
SBB	Secondary Bonding Busbar
SBG	Supplementary Bonding Grid
SRPP	System Reference Potential Plane
SPC	Single Point Of Connection
TBB	Telecommunications Bonding Backbone

iTeh STANDARD PREVIEW

(standards.iteh.ai)

ISO/IEC 30129:2015

<https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>

TBC	Telecommunications Bonding Conductor
TEBC	Telecommunications Equipment Bonding Conductor
TEF	Telecommunications Entrance Facility
TSP	Transient Suppression Plate
UBC	Unit Bonding Conductor

4 Conformance

For bonding infrastructures to conform to this International Standard

- a) an assessment in accordance with Clause 6 shall be undertaken,
 - b) based on the results of the assessment any necessary bonding shall be implemented as follows
 - 1) the backbone and building entrance bonding shall either
 - use the protective bonding network provided that it delivers the performance required by the assessment of Clause 6, or
 - conform to the requirements of Clause 8 for a dedicated bonding system,
 - 2) the local bonding shall either
 - conform to Clause 9 in line with the requirements of the assessment of Clause 5, or
 - conform to the requirements of Clause 10 for a dedicated telecommunications bonding system in line with the requirements of the assessment of Clause 6,

or

 - 3) a mesh bonding network in accordance with Clause 11,
- c) the requirements of Clause 7 shall be applied to all telecommunications bonding networks implemented, <https://standards.iteh.ai/catalog/standards/sist/6f4f80a1-0408-493d-ad88-c746c3a27396/iso-iec-30129-2015>
- d) the cross-sectional areas of bonding conductors shall conform to the requirements of Clauses 7 to 11 as amended by the region-specific application of Annex B,
- e) local regulations, including safety, shall be met.

NOTE The proper implementation of the requirements of this International Standard assumes that electrical installations, protective bonding networks and protective measures against overvoltages are undertaken in accordance with the local regulations, as appropriate.

5 Overview of bonding networks

This International Standard assumes that buildings, or other structures, containing or intended to contain telecommunications equipment are of vertical extent (where a backbone connects zones of different floors) and/or horizontal extent (where a backbone connects multiple zones on a floor) and feature, as follows:

- a) one or more entrance facilities,
- b) one or more identifiable areas within each zone containing concentrations of telecommunications equipment (e.g. spaces associated with the generic cabling distributors of standards supported by ISO/IEC 14763-2),
- c) areas in each zone within which telecommunications equipment is distributed (e.g. locations associated with the generic cabling outlets of standards supported by ISO/IEC 14763-2).

For the purposes of this International Standard

- 1) the term “backbone” refers to connections between the areas of concentrations of telecommunications equipment and between any given area of concentration and a main earthing terminal (MET),

- 2) the term “local” refers to connections between a given area of concentration of telecommunications equipment and the area of distributed telecommunications equipment which it serves or other connections within that area.

This is shown schematically in Figure 2 for telecommunications equipment distribution and telecommunications bonding network terminology.

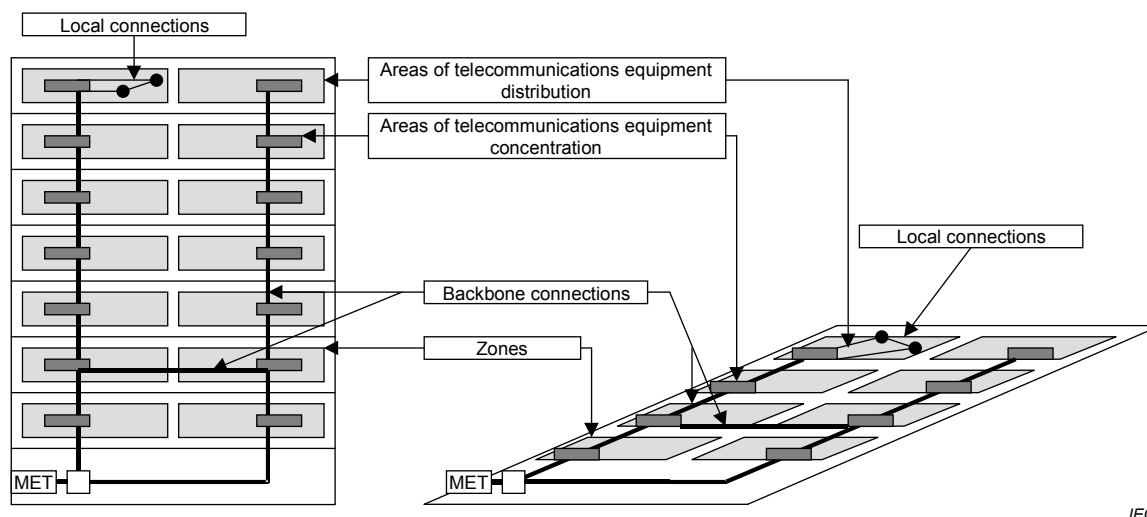


Figure 2 – Schematic of telecommunications equipment distribution and associated bonding connections
(standards.iteh.ai)

The objective of this International Standard is, following the completion of the assessment of Clause 6, to ensure that backbone and local bonding networks

- minimise d.c. and a.c. potential differences in order to reduce the risk to the correct function of telecommunications equipment interconnected by metallic cabling,
- have adequate a.c. and radio frequency performance to provide the telecommunications installation with a reliable signal reference and improved resistance to EMI.

It should be noted that failure to implement correct telecommunications bonding networks can act against this objective.

6 Selection of the telecommunications bonding network approach

6.1 Assessment of the impact of the telecommunications bonding network on the interconnection of telecommunications equipment

The requirements applied to a telecommunications bonding network depend upon the intended type of connectivity between the telecommunications equipment within and between the zones of Figure 2.

The mesh bonded network of Clause 11 is intended to support the most demanding requirements of both cabling media and the applications supported over those media. The mesh bonded network provides complete flexibility in relation to the types and locations of telecommunications equipment that may be installed (subject to the transmission performance limits of the applications when using the selected telecommunications cabling). This is further enhanced by the installation of power distribution systems conforming to TN-S as described in the IEC 60364 series of standards.

The installation of such a telecommunications bonding network is most easily implemented during construction or refurbishment of a building or structure. However, within an existing building