

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –

Part 3-25: Examinations and measurements – Concentricity of non-angled ferrules and non-angled ferrules with fibre installed

[IEC 61300-3-25:2016](https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-1e3110000000/iec-61300-3-25-2016)

[https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-](https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-1e3110000000/iec-61300-3-25-2016)

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 3-25: Examens et mesures – Concentricité des férules sans angle et des férules sans angle avec fibre montée



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2016 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

### A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Catalogue IEC - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

#### Recherche de publications IEC - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

#### Glossaire IEC - [std.iec.ch/glossary](http://std.iec.ch/glossary)

65 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

#### Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [csc@iec.ch](mailto:csc@iec.ch).

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –  
Part 3-25: Examinations and measurements – Concentricity of non-angled ferrules and non-angled ferrules with fibre installed**

<https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-3312-6977-0000-0000-0000-0000>

**Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –  
Partie 3-25: Examens et mesures – Concentricité des férules sans angle et des férules sans angle avec fibre montée**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-3618-5

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD..... 3

1 Scope..... 5

2 Normative references..... 5

3 General description ..... 5

    3.1 General..... 5

    3.2 Method A: ferrule surface reference method (reference test method) ..... 6

    3.3 Method B: core centre reference method on a ferrule with fibre installed ..... 6

4 Apparatus..... 6

    4.1 Method A ..... 6

    4.2 Method B ..... 6

5 Procedure ..... 6

    5.1 Method A-1 ..... 6

    5.2 Method A-2 ..... 7

    5.3 Method B ..... 8

6 Details to be specified ..... 9

    6.1 Method A ..... 9

    6.2 Method B ..... 9

Bibliography ..... 10

Figure 1 – Definition of concentricity ..... 5

Figure 2 – Set-up example for concentricity measurement (method A-1) of ferrules with fibre installed..... 7

Figure 3 – Set-up example for concentricity measurement (method A-2) of bare ferrules..... 8

Figure 4 – Set-up example for concentricity measurement (method B) of ferrules with fibre installed ..... 9

iTeh STANDARD PREVIEW

(standards.iteh.ai)

IEC 61300-3-25:2016

<https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-4551126482/ciec-61300-3-25-2016>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –****Part 3-25: Examinations and measurements – Concentricity of non-angled ferrules and non-angled ferrules with fibre installed**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61300-3-25 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2013 and constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) deletion of method C due to potential damage of ferrule end face by the spindle. Method C is the ferrule bore reference method for bare ferrules according to IEC 61300-3-25:2013;
- b) separation of original method A into method A-1 and method A-2 relating to the two different types of ferrule (with/without fibre fitted);
- c) integration of the content of Annexes A and B into the test procedure.

The text of this standard is based on the following documents:

CDV	Report on voting
86B/3900/CDV	86B/3956A/RVC

Full information on the voting for the approval of this document can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61300 series, published under the general title, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 61300-3-25:2016](https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-d3311264827e/iec-61300-3-25-2016)

<https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-d3311264827e/iec-61300-3-25-2016>

# FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

## Part 3-25: Examinations and measurements – Concentricity of non-angled ferrules and non-angled ferrules with fibre installed

### 1 Scope

This part of IEC 61300 describes the procedure to determine the concentricity of the axis of the bore in a non-angled ferrule with the axis of the ferrule, and in the case of non-angled ferrules with fibre installed, to determine the concentricity of the axis of the fibre core with the axis of the ferrule.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

There are no normative references in this document.


### 3 General description

[IEC 61300-3-25:2016](#)

#### 3.1 General

<https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-d3311264827e/iec-61300-3-25-2016>

This procedure describes the measurement of concentricity of ferrules and ferrules with assembled fibres. Concentricity is defined as twice the distance between the axis of the ferrule and the axis of the inner diameter of the ferrule (ferrule bore), or in the case of ferrules with fibre installed, twice the distance between the axis of the ferrule and the axis of the core of the installed fibre (see Figure 1). When concentricity measurements are made on a ferrule with fibre installed the results will be affected by the geometry of the fibre, and by the fit of the fibre in the ferrule inner diameter. Imperfections of the cylindricity and circularity of the outside diameter of the ferrule will influence the measurement results.

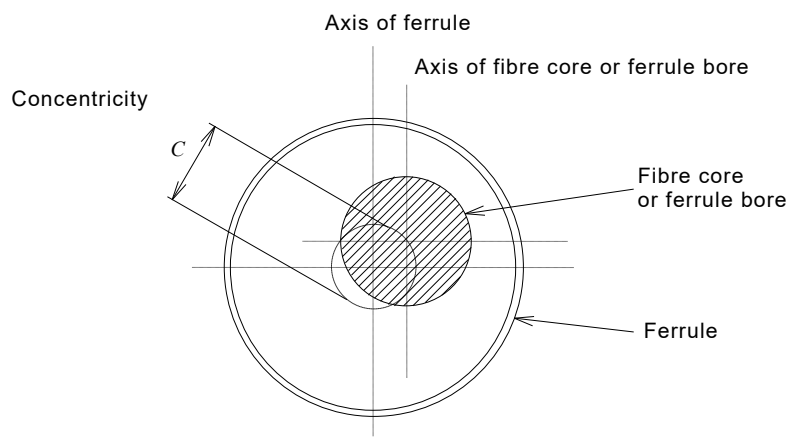

**Figure 1 – Definition of concentricity**

Two methods of concentricity measurement are described in 3.2 and 3.3.

### 3.2 Method A: ferrule surface reference method (reference test method)

In Method A, the ferrule is placed in a V-groove or outer diameter (OD) reference mechanism, and rotated. The displacement of the ferrule inner diameter or fibre core is observed and the concentricity determined.

### 3.3 Method B: core centre reference method on a ferrule with fibre installed

Method B uses a roundness measuring instrument to measure concentricity. In this method, the core axis is fixed at the axis of the measuring instrument, and the concentricity is determined by measuring, usually with a probe, the displacement of the outer diameter of the ferrule as the ferrule is rotated.

## 4 Apparatus

### 4.1 Method A

The apparatus for method A consists of the following elements:

- V-groove or OD reference mechanism mounted on a micro-manipulator. According to ISO 2538, the preferred angle for a V-groove is 108°;
- microscope with video camera;
- display;
- light source; a white light is suitable for this procedure;
- signal processor.

iTech STANDARD PREVIEW  
(standards.iteh.ai)

### 4.2 Method B

The apparatus for method B consists of the following elements:

- roundness measuring instrument with microscope including a recorder, X-Y table, chuck and pickup;
- light source; a white light is suitable for this procedure.

## 5 Procedure

### 5.1 Method A-1

The procedure for a ferrule with fibre installed is as follows.

- a) Clean the outer surface of the ferrule.
- b) Place the ferrule in the V-groove or OD reference mechanism as shown in Figure 2.
- c) Illuminate the fibre core from the other end of the fibre.
- d) Acquire an image of the illuminated fibre core.
- e) Calculate the centre of gravity (COG) with the coordinates  $x$  and  $y$  of the core-pixels using the following formula:

$$\left( \begin{array}{l} COGx = \sum_{I(x,y) \geq thresh} \frac{x \times I(x,y)}{total} \\ COGy = \sum_{I(x,y) \geq thresh} \frac{y \times I(x,y)}{total} \end{array} \right) \quad (1)$$

where


$(x,y)$  is the current pixel location;



- $I(x,y)$  is the pixel intensity at this location;  
 $thresh$  is the threshold (in grey scale value) of the pixel intensity;  
 $total$  is the number of pixels where pixel intensity ( $I(x,y)$ ) is equal to or higher than the threshold.

$$total = \sum_{I(x,y) \geq thresh} I(x,y)$$

- f) Rotate the ferrule in steps of  $60^\circ$  or less, and repeat steps d) and e), until a complete rotation is made.
- g) Calculate, with the measured positions ( $\sigma_1$  to  $\sigma_n$ ), a circle using the best fit method. The diameter of the circle equals the maximum displacement  $C$ .

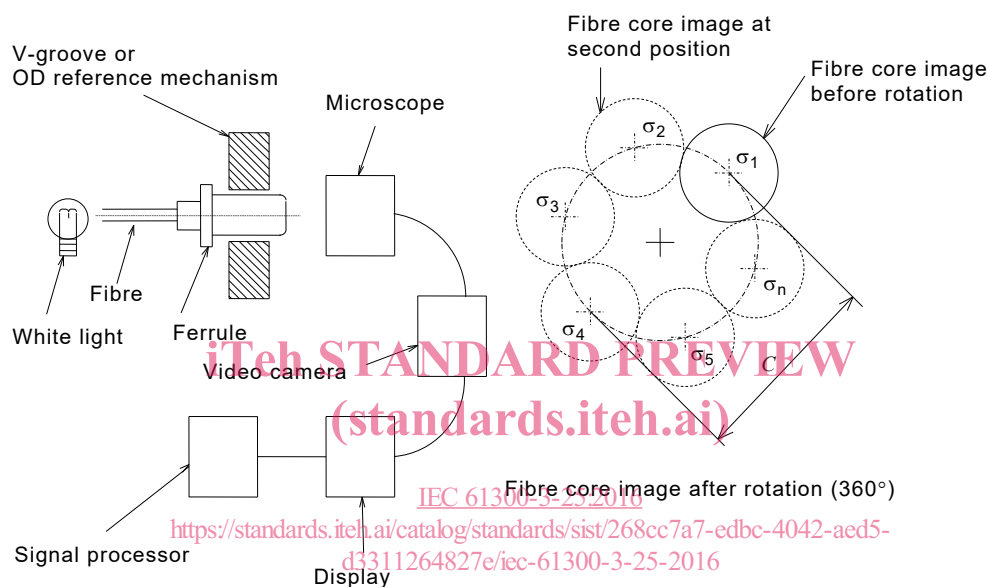

IEC

**Key**


- $\sigma_n$  centre of the fibre core at each position  
 $C$  maximum displacement of the fibre core image

**Figure 2 – Set-up example for concentricity measurement (method A-1) of ferrules with fibre installed**

**5.2 Method A-2**

The procedure for bare ferrules is as follows.

- Clean the ferrule bore thoroughly to assure it is free of dirt, burrs or other obstructions.
- Place the ferrule in the V-groove or OD reference mechanism as shown in Figure 3.
- Illuminate the bore of the ferrule.
- Acquire an image of the illuminated ferrule bore.
- Using high-pass filtering, identify the pixels lying on the edge of the ferrule bore. Find the centre-coordinates of the bore by calculating the least-square fit of a circle to the edge pixels. An iterative process shall be used in order to remove all pixels which do not lie perfectly on the circle.
- Rotate the ferrule in steps of  $60^\circ$  or less, and repeat steps d) and e), until a complete rotation is made.
- Calculate, with the measured positions ( $\sigma_1$  to  $\sigma_n$ ), a circle using the best fit method. The diameter of the circle equals the maximum displacement  $C$ .

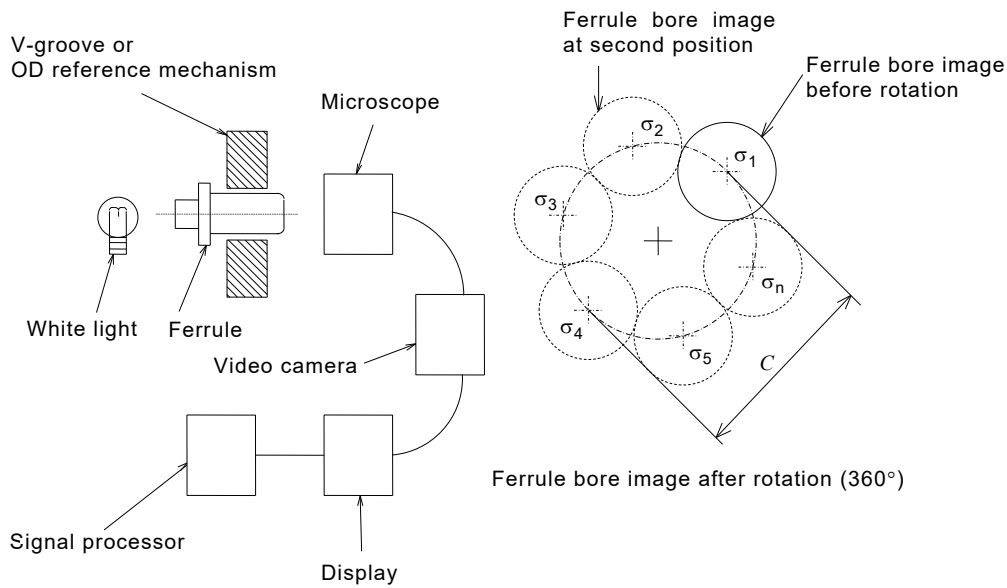

IEC

**Key**

- $\sigma_n$  centre of the ferrule bore at each position
- $C$  maximum displacement of the ferrule bore image


**Figure 3 – Set-up example for concentricity measurement (method A-2) of bare ferrules**

STANDARD PREVIEW  
(standards.iteh.ai)

**5.3 Method B**

The procedure for method B is as follows  
<https://standards.iteh.ai/catalog/standards/sist/268cc7a7-edbc-4042-aed5-d3311264827e/iec-61300-3-25-2016>

- a) Clean the outer surface of ferrule.
- b) Mount the ferrule on the roundness measuring instrument as shown in Figure 4.
- c) Using an X-Y table on the roundness measuring instrument, position the ferrule so that the centre of the fibre core is set exactly at the centre of the rotation axis. The centre of the core is estimated by illuminating the core from the other end of the fibre.
- d) Position the pick-up of the roundness measuring instrument onto the outer surface of the ferrule so as to measure the displacement of the outer surface of the ferrule as the ferrule is rotated.
- e) Rotate the ferrule a minimum of 360° and record the maximum reading from the roundness gauge as  $C_1$  and the minimum reading as  $C_2$ . Concentricity of the part is the difference between the maximum and minimum values ( $C = C_1 - C_2$ ; see Figure 4).

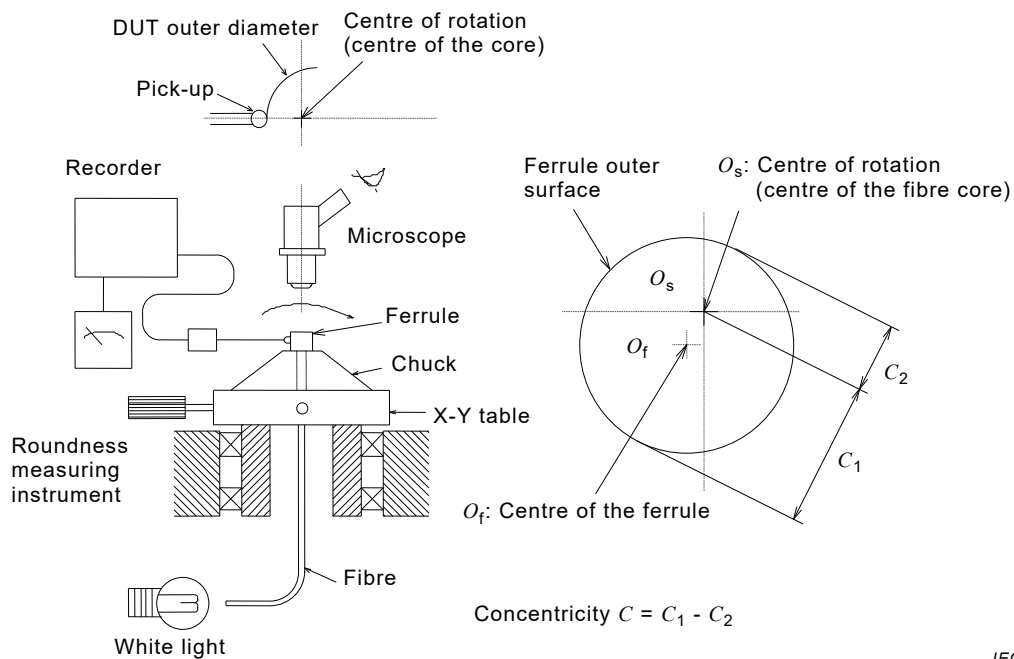

IEC

**Figure 4 – Set-up example for concentricity measurement (method B) of ferrules with fibre installed**

iTeh STANDARD PREVIEW

## 6 Details to be specified (standards.iteh.ai)

### 6.1 Method A

IEC 61300-3-25:2016

The following details, as applicable, shall be specified in the relevant specification:

- allowable concentricity;
- magnification of the microscope;
- deviation from the test procedure;
- measurement uncertainty;
- V-groove or OD reference mechanism;
- resolution of the optical signal processor.

### 6.2 Method B

The following details, as applicable, shall be specified in the relevant specification:

- allowable concentricity;
- accuracy of roundness measuring instrument;
- deviation from the test procedure;
- measurement uncertainty.