

TECHNICAL
REPORT

ISO/IEC
TR 10000-2

Third edition
1994-12-15

**Information technology — Framework and
taxonomy of International Standardized
Profiles —**

Part 2:
Principles and Taxonomy for OSI Profiles

ISO/IEC TR 10000-2:1994
*Technologies de l'information — Cadre et taxonomie des profils
normalisés internationaux —*
Partie 2: Principes et taxonomie pour profils OSI

Library / Bibliothèque

Do not remove / Ne pas enlever



Reference number
ISO/IEC TR 10000-2:1994(E)

Contents

Page

FOREWORD	IV
INTRODUCTION	V
1 SCOPE	1
2 NORMATIVE REFERENCES	1
3 DEFINITION.....	1
4 ABBREVIATIONS.....	2
4.1 GENERAL ABBREVIATIONS	2
4.2 ABBREVIATIONS USED IN PROFILE IDENTIFIERS.....	2
5 THE TAXONOMY: PRINCIPLES.....	2
5.1 GENERAL	2
5.2 THE CLASS CONCEPT FOR OSI PROFILES.....	3
5.3 RELATIONSHIP BETWEEN OSI PROFILES.....	3
5.3.1 A/T and B/U Boundaries.....	3
5.3.2 A/F and B/F Boundaries.....	3
5.4 THE GROUP CONCEPT FOR OSI LOWER LAYER PROFILES.....	5
5.5 PROFILE CLASSES.....	5
5.5.1 Transport Profiles.....	5
5.5.1.1 Principles.....	5
5.5.1.2 Transport Profile identifier.....	6
5.5.1.3 Connection-mode Transport Service: Profile class T.....	6
5.5.1.4 Connectionless-mode Transport Service: Profile class U.....	6
5.5.1.5 Interworking between Transport Profile Groups.....	6
5.5.1.6 Introduction to the Taxonomy of Subnetwork Profiles.....	7
5.5.1.6.1 ... Packet Switched Data Network.....	8
5.5.1.6.2 ... Digital Data Circuit.....	8
5.5.1.6.3 ... Analogue Telephone Circuit.....	8
5.5.1.6.4 ... Integrated Services Digital Network.....	8
5.5.1.6.5 ... Local Area Networks.....	9
5.5.1.6.6 ... Frame Relay Data Networks.....	9
5.5.2 Relay Profiles.....	9
5.5.2.1 Principles.....	9
5.5.2.2 Relay Profile identifier.....	9
5.5.3 Application Profiles.....	9
5.5.3.1 Principles.....	9
5.5.3.2 Common Upper Layer Requirements.....	10

5.5.3.3 Application Profile identifier	10
5.5.3.4 Introduction to the Taxonomy of Application Profiles	10
5.5.3.4.1	... File Transfer, Access and Management	10
5.5.3.4.2	... Message Handling	10
5.5.3.4.3	... Directory	11
5.5.3.4.4	... Virtual Terminal	11
5.5.3.4.5	... OSI Management	11
5.5.3.4.6	... Transaction Processing	11
5.5.3.4.7	... Remote Database Access	11
5.5.3.4.8	... Manufacturing Messaging	11
5.5.3.4.9	... Library and Documentation	12
5.5.3.4.10	... Document Filing and Retrieval	12
5.5.3.4.11	... Interactive Manipulation of ODA Documents	12
5.5.4 Interchange Format and Representation Profiles	12
5.5.4.1 Principles	12
5.5.4.2 Interchange Format and Representation Profile identifier	12
5.5.4.3 Introduction to the Taxonomy of Interchange Format and Representation Profiles	12
5.5.4.3.1	... Open Document Format	12
5.5.4.3.2	... Computer Graphics Metafile Interchange Format	13
5.5.4.3.3	... SGML Interchange Format	13
5.5.4.3.4	... Directory Data Definitions	13
5.5.4.3.5	... Virtual Terminal Environment	13
5.5.4.3.6	... Character Sets	13
6 TAXONOMY OF PROFILES	13
6.1 TRANSPORT PROFILES	14
6.1.1 Taxonomy of Subnetworks	14
6.1.2 Transport Groups	15
6.2 RELAY PROFILES	15
6.2.1 Relaying the Network Internal Layer Service, as defined in ISO/IEC 10028	15
6.2.2 Network Layer Protocol Relaying	16
6.2.3 Relaying the MAC Service	16
6.2.4 CO/CL Interworking	16
6.3 APPLICATION PROFILES	16
6.3.1 File Transfer, Access and Management	16
6.3.2 Message Handling	16
6.3.3 Directory	17
6.3.4 Virtual Terminal	17
6.3.5 OSI Management	17
6.3.6 Transaction Processing	18
6.3.7 Remote Database Access	18
6.3.8 Manufacturing Messaging	18
6.3.9 Library and Documentation	18
6.3.10 Document Filing and Retrieval	18
6.3.11 Interactive Manipulation of ODA Documents	19
6.4 INTERCHANGE FORMAT AND REPRESENTATION PROFILES	19
6.4.1 Open Document Format	19
6.4.2 Computer Graphics Metafile Interchange Format	19
6.4.3 SGML Interchange Format	19
6.4.4 Directory Data Definitions	19
6.4.5 Virtual Terminal Environment	19
6.4.6 Character Sets	20
7 CONFORMANCE OF OSI PROFILES	20
ANNEX A	21
BIBLIOGRAPHY OF OTHER REFERENCED DOCUMENTS	21

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The main task of technical committees is to prepare International Standards, but in exceptional circumstances a technical committee may propose the publication of a Technical Report of one of the following types:

- type 1, when the required support cannot be obtained for the publication of an International Standard, despite repeated efforts;
- type 2, when the subject is still under technical development or where for any other reason there is the future but not immediate possibility of an agreement on an International Standard;
- type 3, when a technical committee has collected data of a different kind from that which is normally published as an International Standard ("state of the art", for example).

Technical Reports of types 1 and 2 are subject to review within three years of publication, to decide whether they can be transformed into International Standards. Technical Reports of type 3 do not necessarily have to be reviewed until the data they provide are considered to be no longer valid or useful.

ISO/IEC TR 10000-2, which is a Technical Report of type 3, was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

This third edition cancels and replaces the second edition (ISO/IEC TR 10000-2:1992), which has been technically revised.

ISO/IEC TR 10000 consists of the following parts, under the general title *Information technology — Framework and taxonomy of International Standardized Profiles*:

- Part 1: *Framework*
- Part 2: *Principles and Taxonomy for OSI Profiles*

Introduction

The context of Functional Standardization is one part of the overall field of Information Technology standardization activities covering

- Base standards, which define fundamentals and generalized procedures. They provide an infrastructure that can be used by a variety of applications, each of which can make its own selection from the options offered by them.
- Profiles, which define conforming subsets or combinations of base standards used to provide specific functions. Profiles identify the use of particular options available in the base standards, and provide a basis for the development of uniform, internationally recognized, conformance tests.
- Registration mechanisms, which provide the means to specify detailed parameterization within the framework of the base standards or Profiles.

Within ISO/IEC JTC 1, the process of Functional Standardization is concerned with the methodology of defining Profiles, and their publication in documents called "International Standardized Profiles" (ISPs) in accordance with procedures contained in Directives of JTC 1.

iTeh STANDARD PREVIEW

In addition to ISO/IEC TR 10000, the secretariat of the Special Group on Functional Standardization maintains a standing document (SD-4) entitled "Directory of ISPs and Profiles contained therein". This is a factual record of which ISPs exist, or are in preparation, together with an executive summary of each Profile. It is subject to regular updating by the Secretariat of ISO/IEC JTC 1/SGFS.

<https://standards.iso.org/standards/catalog/iso/10000-2-1994.html>
11 b643b019/iso-iec-tr-10000-2-1994

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC TR 10000-2:1994

<https://standards.iteh.ai/catalog/standards/sist/ee279447-2cfb-4182-bf38-f1b643b0f9fe/iso-iec-tr-10000-2-1994>

Information technology - Framework and taxonomy of International Standardized Profiles

Part 2: Principles and Taxonomy for OSI Profiles

1 Scope

The purpose of this part of ISO/IEC TR 10000 is to provide a classification for Profiles (Taxonomy) which may be or have been submitted for ratification as International Standardized Profiles (ISPs).

ISO/IEC TR 10000-1 defines the concept of Profiles, as documented in ISPs, and gives guidance to organizations making proposals for Draft ISPs, on the nature and content of the documents they are producing.

The existence of a Profile classification in this part of ISO/IEC TR 10000 does not reflect a judgment by ISO/IEC JTC 1/SGFS that a Profile is required for such capability. It merely provides a capability to identify uniquely such a function and to enable evaluation of PDISPs.

Since Profiles will be proposed according to needs identified to SGFS and according to the progress of international base standardization, the Taxonomy will be periodically updated or have new parts added in order to reflect the progress reached. It is also recognized that there will be proposals for the extension of the Taxonomy to cover functions which were not identified during preparation of this edition of ISO/IEC TR 10000. These extensions may be identified by a variety of proposers and involve simple extensions to the existing Taxonomy or the addition of new functional areas not currently covered by ISO/IEC TR 10000. The inclusion of such extensions is administered following the procedures elaborated by SGFS.

A distinction has been made between a Profile and an ISP documenting one or more Profiles. The Taxonomy is only concerned with Profiles, but further information is given in the "Directory of ISPs and Profiles contained therein" as to which ISP contains the documentation of a Profile.

This *Directory* is maintained as an SGFS standing document SD-4 (see Annex A). For each draft Profile submitted to SGFS, it will also provide additional information, including the status of the identified Profiles.

2 References

ISO/IEC 9646-6:1994, *Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 6: Protocol profile test specification*. {ITU-T Rec. X.295 (1994)}

ISO/IEC 9646-7:—¹, *Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation conformance statements*. {ITU-T Rec. X.296 (1994)}

ISO/IEC TR 10000-1:1992, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 1: Framework*.

3 Definition

For the purposes of this part of ISO/IEC TR 10000, the following definition applies:

Group: A set of OSI Profiles that are compatible, in the sense that a system implementing one Profile from a Group can interwork, according to OSI, with another system implementing a different Profile from the same Group, in terms of the operation of the protocols specified within these Profiles.

4 Abbreviations

4.1 General abbreviations

CL	Connectionless-mode
CLNS	Connectionless-mode Network Service
CLTS	Connectionless-mode Transport Service
CO	Connection-mode
CONS	Connection-mode Network Service
COTS	Connection-mode Transport Service
CSDN	Circuit Switched Data Network
CSMA/CD	Carrier Sense, Multiple Access / Collision Detection
CULR	Common Upper Layer Requirements
DSA	Directory Service Agent
DTE	Data Terminal Equipment
DUA	Directory User Agent
EDI	Electronic Data Interchange
EDIM	EDI Messaging
FDDI	Fibre Distributed Data Interface
FR PVC	Frame Relay Permanent Virtual Circuit
FR SVC	Frame Relay Switched Virtual Call
FRBS	Frame Relay Bearer Service
FRDN	Frame Relay Data Network
FRDTS	Frame Relay Data Transmission Service
IPM	Interpersonal Message
ISDN	Integrated Services Digital Network
ISP	International Standardized Profile
LAN	Local Area Network
MAC	Media Access Control
MMS	Manufacturing Message Specification
MOTIS	Message Oriented Text Interchange System
MS	Message Store
MTA	Message Transfer Agent
MTS	Message Transfer System
ODA	Open Document Architecture
P1	Message Transfer Protocol
P2	Interpersonal Messaging Protocol
P3	MTS Access Protocol
P7	MS Access Protocol
PSDN	Packet Switched Data Network
PSTN	Public Switched Telephone Network
PVC	X.25 Permanent Virtual Circuit
QOS	Quality of Service
SGFS	ISO/IEC JTC 1/Special Group on Functional Standardization
SGML	Standardized General Markup Language
TP	Transaction Processing
TPSU	TP Service User
UA	User Agent
VC	X.25 Virtual Call
VT	Virtual Terminal

4.2 Abbreviations used in Profile identifiers

Abbr.	Profile sub-class (Applications)
ADF	Document Filing and Retrieval
ADI	Directory
AFT	File Transfer, Access and Management
ALD	Library, Documentation
AMH	Message Handling
AMM	Manufacturing Messaging
ADI	Directory
AOD	Interactive Manipulation of ODA Documents
ARD	Remote Database Access
ATP	Transaction Processing
AVT	Virtual Terminal

Abbr.	Profile sub-class (Formats)
FCG	Computer Graphics Metafile Interchange Format
FCS	Character Sets
FDI	Directory Data Definitions
FOD	Open Document Format
FSG	SGML Interchange Format
FVT	Virtual Terminal Registered Objects

Abbr.	Profile sub-class (Lower Layers)
TA	COTS over CLNS
TB	COTS over CONS
TC	COTS over CONS
TD	COTS over CONS
TE	COTS over CONS
UA	CLTS over CLNS
UB	CLTS over CONS
RA	Relaying the CLNS
RB	Relaying the CONS
RC	X.25 Protocol Relaying
RD	Relaying the MAC Service using transparent bridging
RE	Relaying the MAC Service using source routing
RZ	Relaying between CLNS and CONS

5 The Taxonomy: Principles

5.1 General

Profiles are primarily arranged into classes, each class representing a category of functionality of reasonable independence from other classes. The different classes of profile correspond to the major divisions of the taxonomy. ISO/IEC TR 10000-1 provides some further information about the principles used in this primary classification.

Within each class, a class-specific subdivision will be used.

Profile identifiers have been introduced such that each Profile is identified by a character string commencing with one letter (indicating the primary class of the Profile), and continuing with as many further letters or digits as are necessary to reflect its

position within the hierarchic structure of the class. The syntax of all but the first letter is subject to individual definitions for each class (see below).

5.2 The Class concept for OSI Profiles

In order to decouple representation of information or objects from communication protocols, and application-related protocol from subnetwork types, OSI and OSI-related Profiles are divided into the following classes:

- T - Transport Profiles providing connection-mode Transport Service
- U - Transport Profiles providing connectionless-mode Transport Service
- R - Relay Profiles
- A - Application Profiles requiring connection-mode Transport Service
- B - Application Profiles requiring connectionless-mode Transport Service
- F - Interchange format and representation Profiles

Other classes may be required.

Transport Profiles of classes T and U specify how the two modes of OSI Transport Service are provided over the two modes of OSI Network Service, and over specific subnetwork types, such as individual types of LANs, PSDNs, etc. In this way they isolate the A/B-Profiles and F-Profiles from network technology.

T- and U-Profiles are further subdivided into Groups. See „5.4 The Group concept for OSI Lower Layer Profiles“ for details.

Application Profiles of classes A and B specify communications protocol support for particular application types over the two modes of OSI Transport Service, respectively.

F-Profiles specify the characteristics and representation of various types of information interchanged by A- and B-Profiles.

R-Profiles specify Relay functionality needed to enable systems using different T- or U-Profiles to interwork. Interworking between T- and U-Profiles is not contemplated in any JTC 1 work.

Within each of these classes, sub-classes of Profiles are identified which, again, may require further subdivision such that the granularity of the Taxonomy meets the requirements outlined in ISO/IEC TR 10000-1. This leads to a hierarchical structure of Profile (sub-)classes which is given in full in clause „6 Taxonomy of Profiles“.

For the identification of sub-classes and a further subdivision within a given class, a class-dependent methodology is applied. This is explained in the subsequent class-individual sections.

5.3 Relationship between OSI Profiles

The schematic illustration in Figure 1 brings together examples of the relationships which exist between OSI Profiles, particularly the three main subdivisions of the Taxonomy, and the combinations which can be made between Profiles from different classes.

5.3.1 A/T and B/U Boundaries

Actual use of an A- or B-Profile requires that a system operate it in combination with a T- or U-Profile, in order to provide a particular application protocol over a particular subnetwork type. The separation of A- and B-Profiles from T- and U-Profiles is represented by an A/T or B/U boundary. This relationship is illustrated vertically in Figure 1. The location of a set of A-Profiles above a set of T-Profiles, separated by a common A/T boundary, represents the possibility of combining any pair of A- and T-Profiles, one from each of the two classes.

A similar situation exists for the B- and U-Profiles. The A/T boundaries correspond to the OSI Connection-mode Transport Service, and the B/U-boundaries to the OSI Connectionless-mode Transport Service. The possibility of making the combination arises from the fact that a T- or U-Profile is specified to provide the OSI Transport Service and an A- or B-Profile is specified to use the OSI Transport Service.

5.3.2 A/F and B/F Boundaries

The combination of an A- or B-Profile with one or more F-Profiles will be selected by the user to meet the functional requirements in each case. The various general possibilities are illustrated by the vertical relationships in Figure 1. The location of one or more F-Profiles above one or more A/B-Profiles, represents the possibility of combining Profiles from each class.

Unlike the A/T and B/U boundaries, the A/F and B/F boundaries are not characterised by a single service definition.

The Application Layer base standards require, implicitly or explicitly, the structure of information carried or referenced by them to be specified for each instance of communication. The combination of A/B-Profiles with one or more F-Profiles will be selected by the user to meet the functional requirements in each case. However, the choice may be subject to constraints which can be expressed within either A/B-Profiles, F-Profiles, or both.

In other A/B-Profiles, the Application Layer base standards themselves constrain the choice of presentation context.

Constraints may also exist within an F-Profile, arising either from its base standard, or as a result of Profile creation. These

constraints will limit the A-/B-Profiles which can be used to transfer the information.

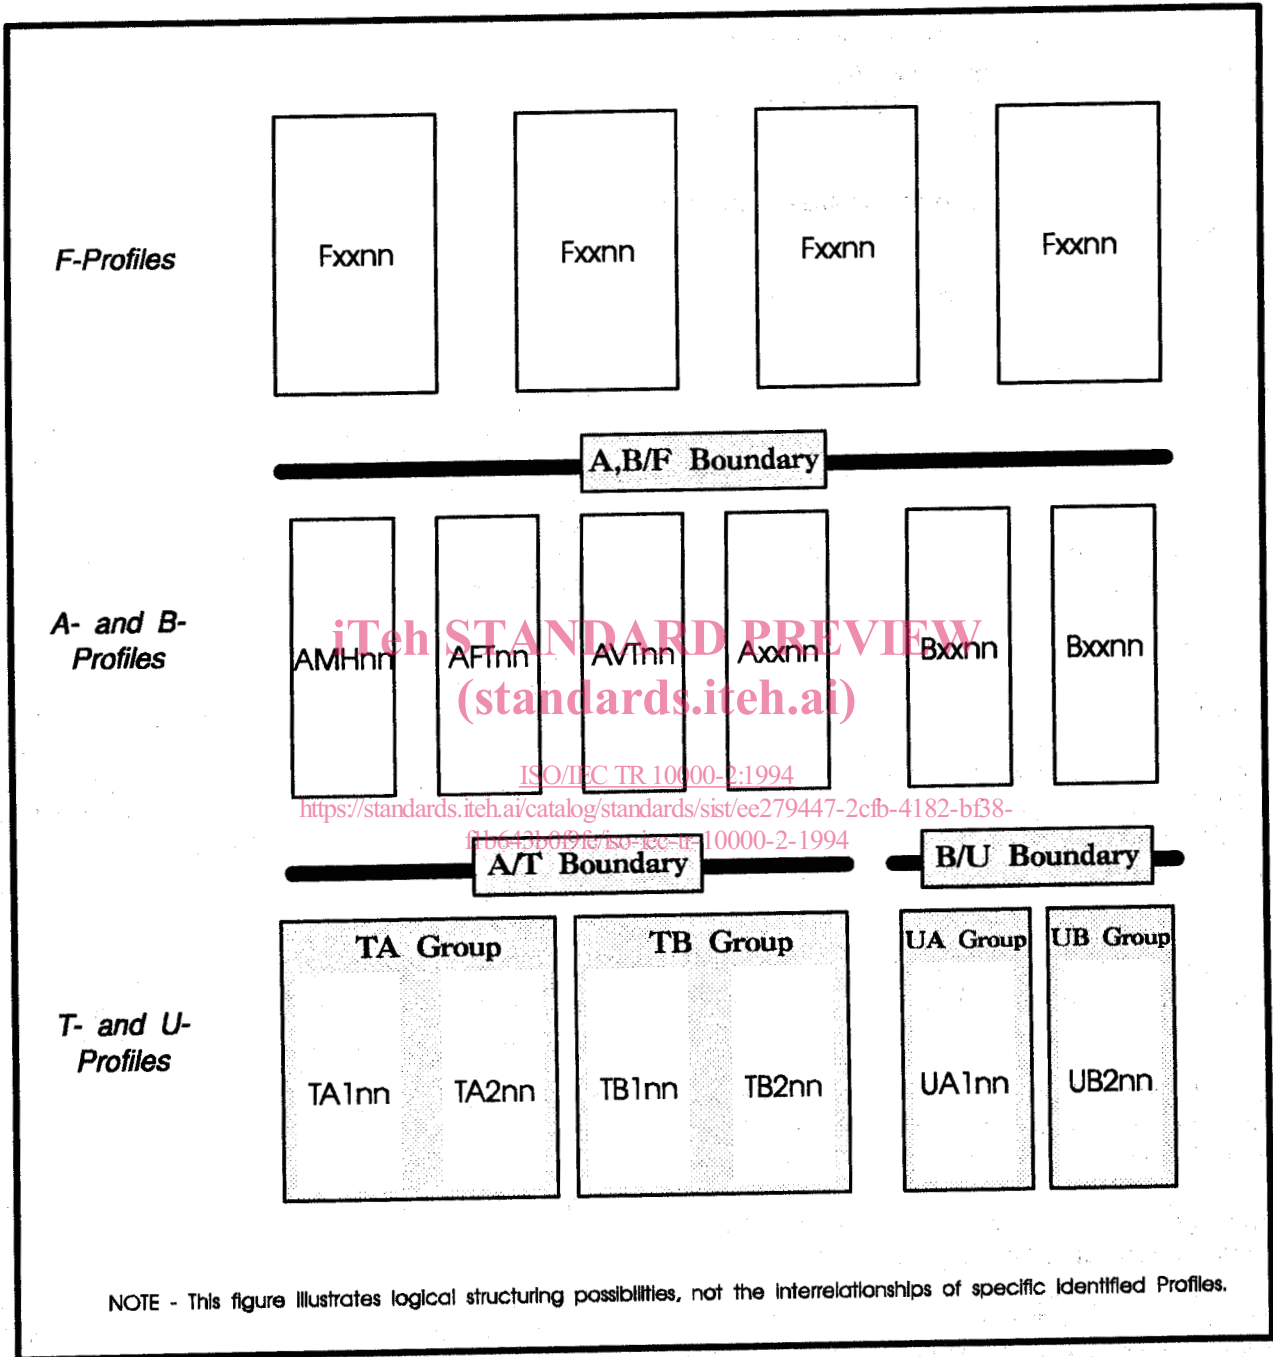


Figure 1: Examples of relationships between Profiles in the OSI Taxonomy

In summary, therefore, there are three forms of constraints affecting the combination of A-/B- and F-Profiles:

- a) the choice of information to be transferred may be constrained by the Application Layer base standards, and possibly further constrained by the A-/B-Profile;
- b) some interchange and representation base standards may limit transfer to particular Application base standards; this choice may be further constrained by the F-Profiles;
- c) the combinations are not constrained by base standards, but may be constrained by either A-/B- or F-Profiles to achieve some general function.

Note that, as always, in making his choice of combination, a user must in practice take account not only of the constraints derived from Profiles, but also the capabilities implemented in the end systems involved in each instance of communication, to support the various Profiles.

5.4 The Group concept for OSI Lower Layer Profiles

The Group concept is used in the Taxonomy as follows:

A Group is a set of T- or U-Profiles that are compatible in the sense that a system implementing one Profile from the Group and another system implementing a Profile from the same Group can be expected to interwork, according to OSI, to some minimum level which is determined by the mandatory features of the Profiles in the Group.

Interworking according to OSI means end-to-end operation across a single subnetwork, or across multiple subnetworks linked by means of Network (or lower) Layer relays.

An example of a Group is the set of T-Profiles that provide the Connection-mode Transport Service, using Class 4 Transport Protocol over the Connectionless-mode Network Service, provided by ISO/IEC 8473. This Group has members which correspond to different subnetwork technologies but interworking between systems conforming to them is made possible by LAN bridges and/or Network Layer relays.

A Group is identified by labels of the form YXnnn, where Y is the class identifier and X is a letter identifying the Group.

5.5 Profile classes

5.5.1 Transport Profiles

5.5.1.1 Principles

Transport Profiles define the use of protocol standards from OSI layers 1 to 4, to provide the OSI Transport Service.

A primary distinction is made between Transport Profiles, based on the mode of Transport Service offered:

— Connection-mode Transport Service:
Profile class T

— Connectionless-mode Transport Service:
Profile class U

For the Transport Profile classification within each class, the following methodology is applied:

- a) As a first level distinction the Group concept (see „5.4 The Group concept for OSI Lower Layer Profiles“) is used in the following way:

A lower layer Group is a collection of Profiles which:

- support the same combination of modes of Transport and Network Service;
- support the same Transport Protocol Class(es);

The notion of a Group is incorporated in the classification.

- b) The second level distinction between Profiles, i.e. within a Group, is made according to the subnetwork type supported (see „6.1.1 Taxonomy of Subnetworks“ for examples of subnetwork types).
- c) Further subdivisions are made according to the characteristics of a particular subnetwork, e.g., switched versus leased line (see 6.1.1 for examples of such characteristics).