



**SLOVENSKI STANDARD**  
**kSIST-TS FprCEN/TS 1329-2:2011**  
**01-november-2011**

---

**Cevni sistemi iz polimernih materialov za (nizko- in visokotemperaturne) odvodne sisteme v zgradbah - Nemehčan polivinilklorid (PVC-U) - 2. del: Navodilo za ugotavljanje skladnosti**

Plastics piping systems for soil and waste discharge (low and high temperature) within the building structure - Unplasticized poly(vinyl chloride) (PVC-U) - Part 2: Guidance for the assessment of conformity

Kunststoff-Rohrleitungssysteme zum Ableiten von Abwasser (niedriger und hoher Temperatur) innerhalb der Gebäudestruktur - Weichmacherfreies Polyvinylchlorid (PVC-U) - Teil 2: Empfehlungen für die Beurteilung der Konformität

Systèmes de canalisations en plastique pour l'évacuation des eaux-vannes et des eaux usées (à basse et à haute température) à l'intérieur de la structure des bâtiments - Poly(chlorure de vinyle) non plastifié (PVC-U) - Partie 2: Guide pour l'évaluation de la conformité

**Ta slovenski standard je istoveten z: FprCEN/TS 1329-2**

---

**ICS:**

23.040.01	Deli cevovodov in cevovodi na splošno	Pipeline components and pipelines in general
91.140.80	Drenažni sistemi	Drainage systems

**kSIST-TS FprCEN/TS 1329-2:2011**      **en,fr,de**



TECHNICAL SPECIFICATION  
SPÉCIFICATION TECHNIQUE  
TECHNISCHE SPEZIFIKATION

**FINAL DRAFT**  
**FprCEN/TS 1329-2**

September 2011

ICS 23.040.01; 91.140.80

Will supersede ENV 1329-2:2001

English Version

**Plastics piping systems for soil and waste discharge (low and high temperature) within the building structure - Unplasticized poly(vinyl chloride) (PVC-U) - Part 2: Guidance for the assessment of conformity**

Systèmes de canalisations en plastique pour l'évacuation des eaux-vannes et des eaux usées (à basse et à haute température) à l'intérieur de la structure des bâtiments - Poly(chlorure de vinyle) non plastifié (PVC-U) - Partie 2: Guide pour l'évaluation de la conformité

Kunststoff-Rohrleitungssysteme zum Ableiten von Abwasser (niedriger und hoher Temperatur) innerhalb der Gebäudestruktur - Weichmacherfreies Polyvinylchlorid (PVC-U) - Teil 2: Empfehlungen für die Beurteilung der Konformität

This draft Technical Specification is submitted to CEN members for formal vote. It has been drawn up by the Technical Committee CEN/TC 155.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

**Warning** : This document is not a Technical Specification. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Specification.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**Management Centre: Avenue Marnix 17, B-1000 Brussels**

<b>Contents</b>		Page
Foreword.....		3
Introduction .....		4
1	Scope .....	6
2	Normative references .....	6
3	Terms and definitions .....	6
4	Abbreviated terms .....	9
5	General.....	10
6	Testing and inspection.....	10
6.1	Material specification .....	10
6.2	Grouping.....	11
6.2.1	General.....	11
6.2.2	Size groups.....	11
6.2.3	Fitting groups.....	12
6.3	Type testing.....	12
6.4	Batch release tests .....	16
6.5	Process verification tests .....	17
6.6	Audit tests .....	18
6.7	Indirect tests.....	21
6.8	Test records .....	21
Annex A (informative) <b>Basic test matrix</b> .....		22
Bibliography.....		23

## Foreword

This document (FprCEN/TS 1329-2:2011) has been prepared by Technical Committee CEN/TC 155 “Plastics piping systems and ducting systems”, the secretariat of which is held by NEN.

This document is currently submitted to the Formal Vote.

This document will supersede ENV 1329-2:2001.


EN 1329 *Plastics piping systems for soil and waste discharge (low and high temperature) within the building structure — Unplasticized poly(vinyl chloride) (PVC-U)* consists of the following Parts:

- Part 1: Specifications for pipes, fittings and the system
- Part 2: Guidance for the assessment of conformity (the present TS)

## Introduction

Figures 1 and 2 are intended to provide general information on the concept of testing and organisation of those tests used for the purpose of the assessment of conformity. For each type of tests, i.e. type testing (TT), batch release test (BRT), process verification test (PVT) and audit test (AT), this document details the applicable characteristics to be assessed and the frequency and sampling of testing.

A typical scheme for the assessment of conformity of compounds/formulations, pipes, fittings, valves or assemblies by manufacturers is given in Figure 1.

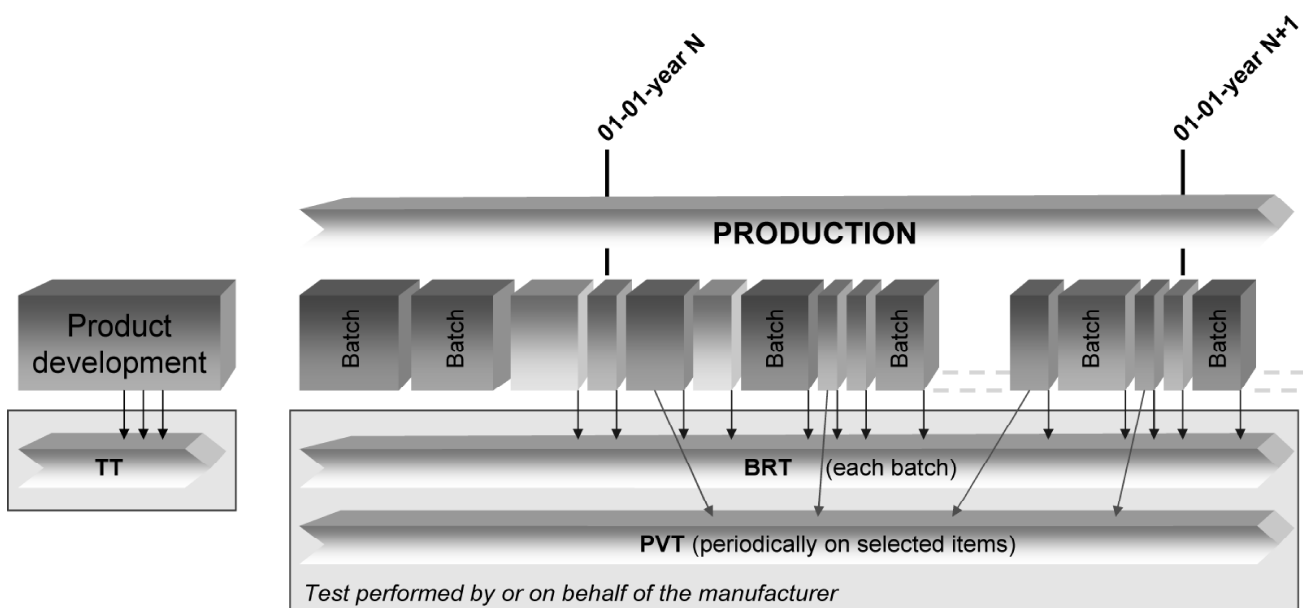

**Figure 1 — Typical scheme for the assessment of conformity by a manufacturer**

A typical scheme for the assessment of conformity of compounds/formulations, pipes, fittings, valves or assemblies by manufacturers, including a third-party certification, is given in Figure 2.

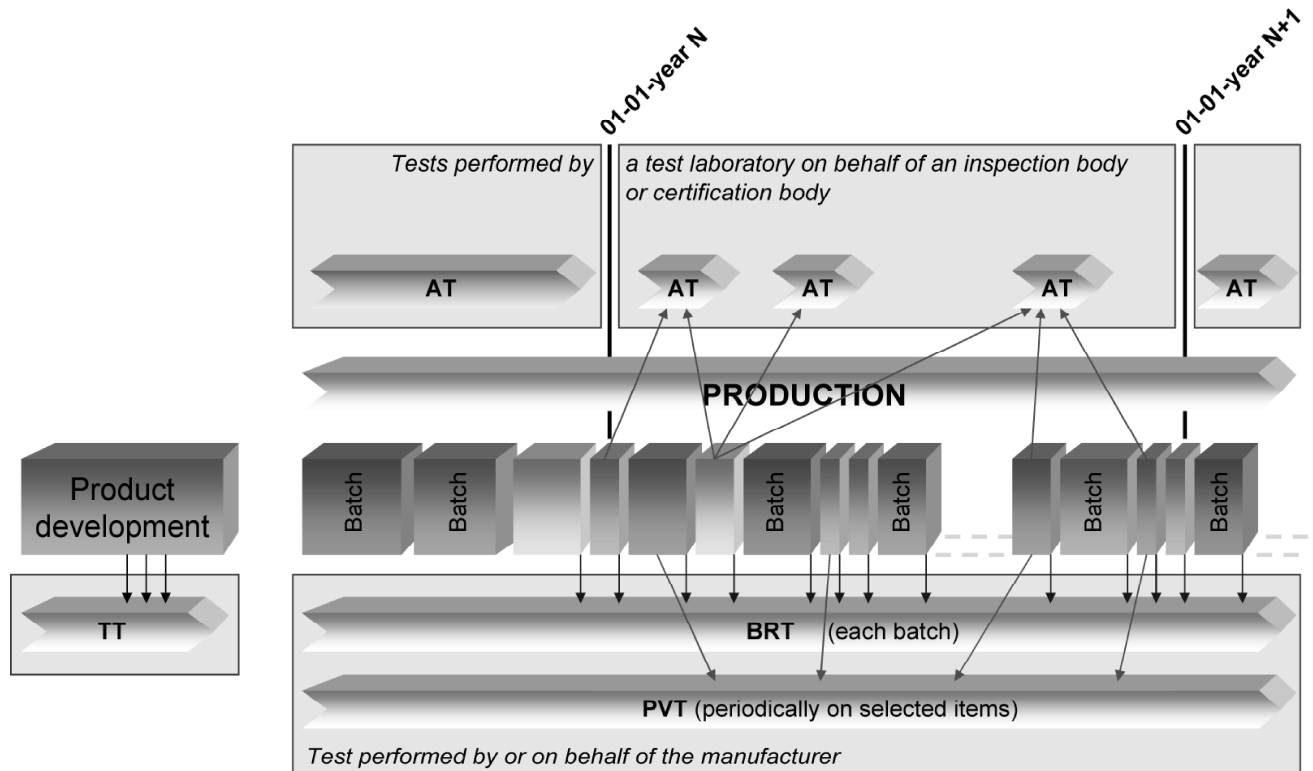


Figure 2 — Typical scheme for the assessment of conformity by a manufacturer, including a third-party certification

## FprCEN/TS 1329-2:2011 (E)

### 1 Scope

This Technical Specification gives guidance for the assessment of conformity of compounds/formulations, products and assemblies in accordance with EN 1329-1 intended to be included in the manufacturer's quality plan as part of the quality management system and for the establishment of third-party certification procedures.

NOTE 1 It is recommended that the quality management system conforms to or is no less stringent than the relevant requirements to EN ISO 9001 [1].

NOTE 2 If third-party certification is involved, it is recommended that the certification body is accredited to EN 45011 [2], EN 45012 [3] or EN ISO/IEC 17021 [4], as applicable.

NOTE 3 In order to help the reader, a basic test matrix is given in Annex A.

In conjunction with EN 1329-1, this document is applicable to piping systems made of unplasticized poly(vinyl chloride) (PVC-U) intended to be used:

- for soil and waste discharge systems (low and high temperature) inside buildings (application area code "B") and,
- for soil and waste discharge systems (low and high temperature) for both inside buildings and buried in ground within the building structure (application area code "BD")

This is reflected in the marking of products by "B" or "BD".

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1329-1, *Plastics piping systems for soil and waste discharge (low and high temperature) within the building structure — Unplasticized poly(vinyl chloride) (PVC-U) — Part 1: Specifications for pipes, fittings and the system*

### 3 Terms and definitions

For the purposes of this Technical Specification, the terms and definitions given in EN 1329-1 and the following apply.

**3.1 certification body**  
impartial body, governmental or non-governmental, possessing the necessary competence and responsibility to carry out certification of conformity according to given rules of procedure and management

NOTE A certification body is preferably accredited to EN 45011 [2].

**3.2 inspection body**  
impartial organisation or company approved by the certification body as possessing the necessary competence to verify and/or to carry out initial type testing, audit testing and inspection of the manufacturer's factory production control in accordance with the relevant standard

NOTE An inspection body is preferably accredited to EN ISO/IEC 17020 [5].



**3.3****testing laboratory**

laboratory which measures, tests, calibrates or otherwise determines the characteristics of the performance of materials and products

NOTE 1 In the context of this part of EN 1329, the materials and products can be subjected to type testing, batch release testing, process verification testing, audit testing and witness testing, as applicable.

NOTE 2 A testing laboratory is preferably accredited to EN ISO/IEC 17025 [6].

**3.4****quality management system**

a system to direct and control an organization with regard to quality

NOTE Requirements for quality management systems are given in EN ISO 9001 [1].

**3.5****quality plan**

document setting out the specific quality practices, resources and sequence of activities relevant to a particular product or range of products

**3.6****type testing****TT**

testing performed to prove that the material, product, joint or assembly is capable of conforming to the requirements given in the relevant standard

NOTE The type test results remain valid until there is a change in the compound/formulation or product or assembly provided that the process verification tests are done regularly.

**3.7****batch release test****BRT**

test performed by or on behalf of the manufacturer on a batch of compounds/formulations or products, which has to be satisfactorily completed before the batch can be released

**3.8****process verification test****PVT**

test performed by, or on behalf of the manufacturer on compounds/formulations, products or joints or assemblies at specific intervals to confirm that the process continues to be capable of producing products which conform to the requirements given in the relevant standard

NOTE Such tests are not required to release batches of compounds/formulations or products and are carried out as a measure of process control.

**3.9****audit test****AT**

test performed by a test laboratory on behalf of an inspection body or certification body to confirm that the compound/formulation, product, joint or assembly continues to conform to the requirements given in the relevant standard and to provide information to assess the effectiveness of the quality management system

**3.10****indirect test****IT**

test performed by or on behalf of the manufacturer, different from that specified test for that particular characteristic, having previously verified its correlation with the specified test

**FprCEN/TS 1329-2:2011 (E)****3.11****witness test****WT**

test accepted by an inspection or a certification body for type testing and/or audit testing, which is carried out by or on behalf of the manufacturer and supervised by a representative of the inspection or certification body, qualified in testing

**3.12****material**

generic term for compounds/formulations grouped by families, expressed by generic names, e.g. polypropylene, stainless steel, brass or EPDM

NOTE Definition from European Commission, Directorate-General for Enterprise and Industry, Sub-group on Product Testing Procedures (EC, DG ENT and IND, SG PTP).

**3.13****compound/formulation**

clearly defined homogenous mixture of base polymer with additives, i.e. anti-oxidants, pigments, stabilizers and others, at a dosage level necessary for the processing and the intended use of the final product

**3.14****material batch**

clearly identified quantity of a given homogeneous compound/formulation manufactured under uniform conditions and defined and identified by the compound/formulation manufacturer

**3.15****product**

pipe or fitting of a clearly identified type intended to be a part of a piping system which the manufacturer puts on the market

**3.16****product batch**

clearly identified collection of products, manufactured consecutively or continuously under the same conditions, using the same compound/formulation conforming to the same specification

NOTE The production batch is defined and identified by the product manufacturer.

**3.17****lot**

clearly identifiable sub-division of a batch for inspection purposes

**3.18****sample**

one or more products drawn from the same production batch or lot, selected at random without regard to their quality

NOTE The number of products in the sample is the sample size.

**3.19****group**

collection of similar products from which samples are selected for testing purposes

**3.20****component**

product manufactured out of a specific compound/formulation, brought to the market as part of another product or as a spare part