

SLOVENSKI STANDARD SIST-TS CEN/TS 12666-2:2012

01-oktober-2012

Nadomešča:

SIST-TS CEN/TS 12666-2:2006

Cevni sistemi iz polimernih materialov za odpadno vodo in kanalizacijo, ki delujejo po težnostnem principu in so položeni v zemljo - Polietilen (PE) - 2. del: Navodilo za ugotavljanje skladnosti

Plastics piping systems for non-pressure underground drainage and sewerage - Polyethylene (PE) - Part 2: Guidance for the assessment of conformity

iTeh STANDARD PREVIEW

Kunststoff-Rohrleitungssysteme für erdverlegte Abwasserkanäle und -leitungen -Polyethylen (PE) - Teil 2: Empfehlungen für die Beurteilung der Konformität

SIST-TS CEN/TS 12666-2:2012

Systèmes de canalisations en plastique pour les branchements et les collectuers d'assainissement enterrés sans pression Polyéthylène (PE) - Partie 2: Guide pour l'évaluation de la conformité

Ta slovenski standard je istoveten z: CEN/TS 12666-2:2012

ICS:

23.040.01 Deli cevovodov in cevovodi na splošno Pipeline components and pipelines in general
91.140.80 Drenažni sistemi Drainage systems
93.030 Zunanji sistemi za odpadno External sewage systems vodo

SIST-TS CEN/TS 12666-2:2012 en,fr,de

SIST-TS CEN/TS 12666-2:2012

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST-TS CEN/TS 12666-2:2012 https://standards.iteh.ai/catalog/standards/sist/d49a3de9-cf69-4061-8830-3cbda1d14f7b/sist-ts-cen-ts-12666-2-2012

TECHNICAL SPECIFICATION SPÉCIFICATION TECHNIQUE TECHNISCHE SPEZIFIKATION

CEN/TS 12666-2

August 2012

ICS 23.040.01; 91.140.80

Supersedes CEN/TS 12666-2:2005

English Version

Plastics piping systems for non-pressure underground drainage and sewerage - Polyethylene (PE) - Part 2: Guidance for the assessment of conformity

Systèmes de canalisations en plastique pour les branchements et les collecteurs d'assainissement enterrés sans pression - Polyéthylène (PE) - Partie 2: Guide pour l'évaluation de la conformité Kunststoff-Rohrleitungssysteme für erdverlegte Abwasserkanäle und -leitungen - Polyethylen (PE) - Teil 2: Empfehlungen für die Beurteilung der Konformität

This Technical Specification (CEN/TS) was approved by CEN on 23 July 2012 for provisional application.

The period of validity of this CEN/TS is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the CEN/TS can be converted into a European Standard.

CEN members are required to announce the existence of this CEN/TS in the same way as for an EN and to make the CEN/TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the CEN/TS) until the final decision about the possible conversion of the CEN/TS into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

3cbda1d14f7b/sist-ts-cen-ts-12666-2-2012



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Cont	tents	Page
Forewo	ord	3
Introdu	uction	4
1	Scope	5
2	Normative references	5
3	Terms and definitions	5
4	Abbreviated terms	8
5	General	9
6 6.1 6.2 6.2.1 6.2.2 6.2.3	Testing and inspection Material specification Grouping General Size groups Fitting groups	9 99 9
6.2.3 6.3	Type testing	10
6.4 6.5 6.6 6.7	Batch release tests TANDARD PREVIEW Process verification tests Audit tests (standards.iteh.ai)	16 17
6.8	Test records	18 19
Bibliography 3cbda.ld1.4f7h/sist-ts-cen-ts-1.2666-2-2012		

Foreword

This document (CEN/TS 12666-2:2012) has been prepared by Technical Committee CEN/TC 155 "Plastics piping systems and ducting systems", the secretariat of which is held by NEN.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes CEN/TS 12666-2:2005.

EN 12666 consists of the following parts, under the general title *Plastics piping systems for non-pressure underground drainage and sewerage - Polyethylene (PE)*:

- Part 1: Specifications for pipes, fittings and the system:
- Part 2: Guidance for the assessment of conformity (this European Standard).

According to the CEN/CENELEC Internal Regulations, the national standards organisations of the following countries are bound to announce this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

(standards.iteh.ai)

<u>SIST-TS CEN/TS 12666-2:2012</u> https://standards.iteh.ai/catalog/standards/sist/d49a3de9-cf69-4061-8830-3cbda1d14f7b/sist-ts-cen-ts-12666-2-2012

Introduction

Figures 1 and 2 are intended to provide general information on the concept of testing and organisation of those tests used for the purpose of the assessment of conformity. For each type of test, i.e. type testing (TT), batch release test (BRT), process verification test (PVT), and audit test (AT), this document details the applicable characteristics to be assessed as well as the frequency and sampling of testing.

A typical scheme for the assessment of conformity of materials, pipes, fittings, joints or assemblies by manufacturers is given in Figure 1.

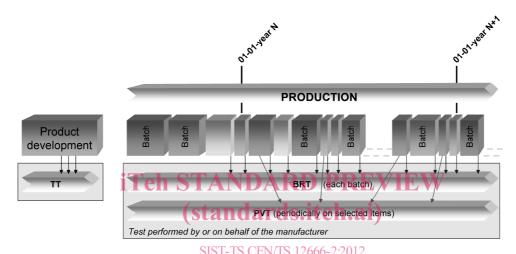


Figure 1 — Typical scheme for the assessment of conformity by a manufacturer 3cbda1d14f7b/sist-ts-cen-ts-12666-2-2012

A typical scheme for the assessment of conformity of materials, pipes, fittings, joints or assemblies by manufacturers, including a third-party certification, is given in Figure 2.

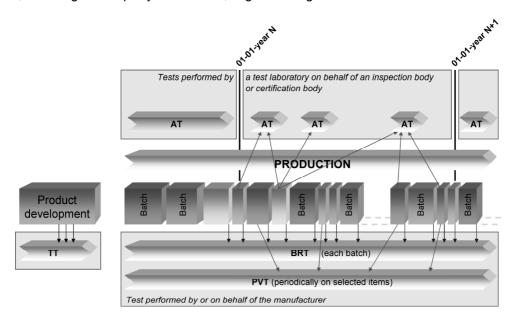


Figure 2 — Typical scheme for the assessment of conformity by a manufacturer, including a third-party certification

1 Scope

This Technical Specification gives guidance for the assessment of conformity of materials, products, joints and assemblies in accordance with the applicable part(s) of EN 12666 intended to be included in the manufacturer's quality plan as part of the quality management system and for the establishment of third-party certification procedures.

NOTE 1 It is recommended that the quality management system conforms to or is no less stringent than the relevant requirements to EN ISO 9001:2008 [1].

NOTE 2 If third-party certification is involved, it is recommended that the certification body is accredited to EN 45011 [2], EN 45012 [3] or EN ISO/IEC 17021 [4], as applicable.

NOTE 3 In order to help the readers, a summary of the test regime is given in Annex A.

In conjunction with EN 12666-1 (see Foreword) this document is applicable to piping systems made of polyethylene (PE):

- non-pressure underground drainage and sewerage outside the building structure (application area code "U"), reflected in the marking of products by "U", and
- for non-pressure underground drainage and sewerage for both buried in the ground within the building structure (application area code "D") and outside the building structure (application area code "U"), reflected in the marking of products by "UD".

iTeh STANDARD PREVIEW

2 Normative references (standards.iteh.ai)

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 12666-1:2005+A1:2011, Plastics piping systems for non-pressure underground drainage and sewerage — Polyethylene (PE) — Part 1: Specifications for pipes, fittings and the system

3 Terms and definitions

For the purposes of this document, the following terms and definitions given in EN 12666-1:2005+A1:2011 and the following apply.

3.1

certification body

impartial body, governmental or non-governmental, possessing the necessary competence and responsibility to carry out certification of conformity according to given rules of procedure and management

Note 1 to entry: A certification body is preferably accredited to EN 45011 [2] / ISO/IEC Guide 65 [2].

3.2

inspection body

impartial organisation or company, approved by the certification body as possessing the necessary competence to verify and/or to carry out initial type testing, audit testing and inspection of the manufacturer's factory production control in accordance with the relevant standard

Note 1 to entry: An inspection body is preferably accredited to EN ISO/IEC 17020 [5].

3.3

testing laboratory

laboratory which measures, tests, calibrates or otherwise determines the characteristics of the performance of materials and products

Note 1 to entry: In the context of this part of EN 12666, the materials and products can be subjected to type testing, batch release testing, process verification testing, audit testing, and witness testing, as applicable.

Note 2 to entry: A testing laboratory is preferably accredited to EN ISO/IEC 17025[6].

3.4

quality management system

management system to direct and control an organisation with regard to quality

Note 1 to entry: Requirements for quality management systems are given in EN ISO 9001:2008 [1].

3.5

quality plan

document setting out the specific quality practices, resources and sequence of activities relevant to a particular product or range of products

3.6

type testing

ΤŤ

testing performed to prove that the material, product, joint or assembly is capable of conforming to the requirements given in the relevant standard TANDARD PREVIEW

Note 1 to entry: The type test results remain valid until there is a change in the material or product or assembly provided that the process verification tests are done regularly.

3.7 <u>SIST-TS CEN/TS 12666-2:2012</u>

batch release test https://standards.iteh.ai/catalog/standards/sist/d49a3de9-cf69-4061-8830-

BRT 3cbda1d14f7b/sist-ts-cen-ts-12666-2-2012

test performed by or on behalf of the manufacturer on a batch of materials or products, which has to be satisfactorily completed before the batch can be released

3.8

process verification test

PVT

test performed by or on behalf of the manufacturer on materials, products or joints at specific intervals to confirm that the process continues to be capable of producing products which conform to the requirements given in the relevant standard

Note 1 to entry: Such tests are not required to release batches of materials or products and are carried out as a measure of process control.

3.9

audit test

ΑТ

test performed by a test laboratory on behalf of an inspection body or certification body to confirm that the material, product, joint or assembly continues to conform to the requirements given in the relevant standard and to provide information to assess the effectiveness of the quality management system

3.10

indirect test

ΙT

test performed by or on behalf of the manufacturer, different from that specified test for that particular characteristic, having previously verified its correlation with the specified test

3.11

witness test

WT

test accepted by an inspection or a certification body for type testing and/or audit testing, which is carried out by or on behalf of the manufacturer and supervised by a representative of the inspection or certification body, qualified in testing

3.12

material

generic term for compositions of compounds/formulations grouped by families, expressed by generic names, e.g. polypropylene, stainless steel, brass or EPDM

Note 1 to entry: Definition from European Commission, Directorate-General for Enterprise and Industry, Sub-group on Product Testing Procedures (EC, DG ENT and IND, SG PTP).

3.13

compound/formulation

clearly defined homogenous mixture of base polymer with additives, i.e. antioxidants, pigments, stabilizers and others, at a dosage level necessary for the processing and the intended use of the final product

3.14

material batch

clearly identified quantity of a given homogeneous compound/formulation manufactured under uniform conditions and defined and identified by the compound/formulation manufacturer

3.15 iTeh STANDARD PREVIEW

product

pipe, fitting, or valve of a clearly identified type intended to be a part of a piping system which the manufacturer puts on the market

3.16 <u>SIST-TS CEN/TS 12666-2:2012</u>

product batch https://standards.iteh.ai/catalog/standards/sist/d49a3de9-cf69-4061-8830-

clearly identified collection of products; manufactured consecutively or continuously under the same conditions, using the same material conforming to the same specification

Note 1 to entry: The production batch is defined and identified by the product manufacturer.

3.17

lot

clearly identifiable sub-division of a batch for inspection purposes

3.18

sample

one or more products drawn from the same production batch or lot, selected at random without regard to their quality

Note 1 to entry: The number of products in the sample is the sample size.

3.19

group

collection of similar products from which samples are selected for testing purposes

3.20

component

product manufactured out of a specific composition of compound/formulation, brought to the market as part of another product or as a spare part

3.21

joint

connection between two products

3.22

assembled product

assembled final product using two or more single parts

thermoplastics fabricated fitting

fitting produced from pipe and/or from injection-moulded fittings by thermoforming, solvent-cementing or welding

3.24

assembly

product that can be dismantled into a set of components

A test piece consisting of various products.

3.25

sampling plan

specification of the type of sampling to be used combined with the operational specification of the entities or increments to be taken, the samples to be constituted and the measurements or tests to be made

(standards.iteh.ai)

EXAMPLE A specific plan which indicates the number of units of products or assemblies to be inspected.

3.26

product type

generic description of a product

A pipe or fitting or valve or their main parts, of the same design, from a particular compound. **EXAMPLE**

3.27

cavity

(moulding) space within a mould to be filled to form the moulded product

3cbdald14f7b/sist-ts-cen-ts-12666-2-2012
That part of an injection mould which gives the form to the injection-moulded product. **EXAMPLE**

Abbreviated terms

To avoid misunderstanding, the abbreviations in this clause are defined as being the same in each language. For the same reason, the terms are given in the three languages, English, French and German.

	EN	FR	DE
AT	audit test	essai d'audit	Überwachungsprüfung
BRT	batch release test	essai de libération de campagne de fabrication	Freigabeprüfung einer Charge
IT	indirect test process verification test	essai indirect	indirekte Prüfung
PVT		essai de vérification du procédé de fabrication	Prozessüberprüfung
TT	type test witness testing	essai de type	Typprüfung
WT		essai témoin	Prüfung unter Aufsicht

5 General

- **5.1** Materials, products, joints and assemblies shall conform to the requirements given in EN 12666-1.
- **5.2** Products and assemblies shall be produced by the manufacturer under a quality management system which includes a quality plan.

It is recommended that the quality management system conforms to or is no less stringent than the relevant requirements to EN ISO 9001:2008 [1].

6 Testing and inspection

6.1 Material specification

For the purposes of this Technical Specification, the material specification consists of a compound/formulation comprising a polyethylene (PE) compound/formulation with specific trade name and additives with known dosage level.

6.2 Grouping

6.2.1 General

For the purposes of this Technical Specification, the groups specified in 6.2.2 and 6.2.3 applies.

6.2.2 Size groups (standards.iteh.ai)

Four size groups are defined for pipes and fittings, as given in Table 1.

For testing purposes, one individual nominal diameter, a_n , shall be selected from each group.