

SLOVENSKI STANDARD SIST EN 12463:2004+A1:2011

01-julij-2011

Nadomešča:

SIST EN 12463:2004

Stroji za predelavo hrane - Polnilniki in pomožni stroji - Varnostne in higienske zahteve (vključno z dopolnilom A1)

Food processing machinery - Filling machines and auxiliary machines - Safety and hygiene requirements

Nahrungsmittelmaschinene Füllmaschinen und Vorsatzmaschinen Sicherheits- und Hygieneanforderungen (standards.iteh.ai)

Machines pour les produits alimen<u>taires : Machines à po</u>usser et machines auxiliaires - Prescriptions relatives à la sécurité et la l'hygiène est/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

Ta slovenski standard je istoveten z: EN 12463:2004+A1:2011

ICS:

67.260 Tovarne in oprema za

živilsko industrijo

Plants and equipment for the

food industry

SIST EN 12463:2004+A1:2011 en,fr,de

SIST EN 12463:2004+A1:2011

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 12463:2004+A1:2011 https://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011 EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM EN 12463:2004+A1

February 2011

ICS 67.260

Supersedes EN 12463:2004

English Version

Food processing machinery - Filling machines and auxiliary machines - Safety and hygiene requirements

Machines pour les produits alimentaires - Machines à pousser et machines auxiliaires - Prescriptions relatives à la sécurité et à l'hygiène

Nahrungsmittelmaschinen - Füllmaschinen und Vorsatzmaschinen - Sicherheits- und Hygieneanforderungen

This European Standard was approved by CEN on 2 February 2004 and includes Amendment 1 approved by CEN on 18 Dezember 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

SIST EN 12463:2004+A1:2011 https://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents		Page	
Forew	ord	3	
Introd	Introduction		
1	Scope	5	
2	Normative references	10	
3	Terms and definitions	11	
4	List of significant hazards	14	
5	Safety and hygiene requirements and/or protective measures	21	
6	Verification of safety and hygiene requirements and/or protective measures	45	
7	Information for use		
Annex A.1 A.2 A.3	A (normative) Noise test code for filling machines and auxiliary machines (grade 2) Determination of the emission sound pressure level	51 51 51	
A.4 A.5	Measurement	51 52	
A.6 A.7	Information to be reported(stam.damg.s.itch.ai) Declaration and verification of the noise emission values	52 52	
Annex	B (normative) Design principles to ensure the cleanability of Filling machines and		
B.1 B.2 B.3	auxiliary machines https://standards.heh.a/reaudog/standards/sisv/5ad3aac6-8849-4267-94a8- Definition 40a26684790/sist-en-12463-2004a1-2011 Materials of construction Design	53 53 54 54	
Annex C (normative) Common hazards for food processing machines and reduction requirements applicable to Filling machines and auxiliary machines			
C.1 C.2 C.3	Cutting hazardsRisks from cleaningExternal influences on electrical equipment	58	
C.4 C.5 C.6	Hazards due to cleaning substances	59	
Annex	x ZA (informative) ♠ Relationship between this European Standard and the Essential Requirements of EU Directive 2006/42/EC ♠	60	
Biblio	graphy	61	

Foreword

This document (EN 12463:2004+A1:2011) has been prepared by Technical Committee CEN/TC 153 "Machinery intended for use with foodstuffs and feed", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2011, and conflicting national standards shall be withdrawn at the latest by August 2011.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document includes Amendment 1, approved by CEN on 2010-12-18.

This document supersedes EN 12463:2004.

The start and finish of text introduced or altered by amendment is indicated in the text by tags [A].

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association and supports essential requirements of EU Directive(s).

For relationship with EU Directives, see informative Annex ZA, which is an integral part of this document.

It is one of a series of standards for meat processing machinery, in compliance with EN 1672-2:2005+A1:2009 (A), Annex C.

SISTEN 12463:2004+A1:2011

This European Standard also contains a bibliography. Sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Introduction

h This document is a type C standard as stated in EN ISO 12100.

The machinery concerned and the extent to which hazards, hazardous situations and hazardous events are covered are indicated in the scope of this document.

When provisions of this type C standard are different from those which are stated in type A or B standards, the provisions of this type C standard take precedence over the provisions of the other standards, for machines that have been designed and built according to the provisions of this type C standard. (4)

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 12463:2004+A1:2011 https://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

1 Scope

- **1.1** This document applies for:
- filling machines with cylinder and piston,
- filling machines with feed intake hopper, feeder and loading device,
- auxiliary machines for filling machines.

This document does not apply to filling machines with cylinder and manual operation.

This document deals with all significant hazards, hazardous situations and events relevant to machines, appliances and machinery, when they are used as intended and under the conditions foreseen by the manufacturer and also the reasonable foreseeable misuse (see Clause 4).

These significant hazards, hazardous situations and events exist during the whole life of filling machines.

This document is not applicable to filling machines and auxiliary machines which are manufactured before the date of publication of this document by CEN.

Filling machines described in this document are no forming, filling and sealing machines as described in EN 415-3. Clipping machines are not covered by this document.

1.2 This document covers the following types of filling machines and auxiliary machines: (standards.iten.ai)

1.2.1 Filling machines with cylinder

SIST EN 12463:2004+A1:2011

- Filling machines with cylinder consist of piston, closing cover, machine frame accessory drive parts and electrical and hydraulic components. 4790/sist-en-12463-2004a1-2011
- The material being processed will be fed by hand into the cylinder.

The distance H_1 from the floor (standing area) to the middle of the discharge port (filling horn) is > 975 mm (see Figure 1).

- Filling machines with cylinder will be switched on or off by a knee-operated lever switch.
- Filling machines with cylinder can be fitted with;
 - divider slide valve,
 - divider rotating valve.


1.2.2 Filling machines with feed intake hopper

- Filling machines with feed hopper intake (with or without infeed auger) consist of feeder on discharge side
 of the feed intake hopper, machine frame, accessory drive parts and electric, electronic or pneumatic
 components, depending on machine type.
- The material being processed will be fed by hand into the feeding hopper of the filling machine.
- Processing of larger quantities of filling material and the height of the filling machine with feed intake hopper can make it necessary to provide a loading device. The loading device is covered by this document.

- The distance H1 from the floor (standing area) to the middle of the discharge port (filling horn) is > 975 mm (see Figure 2).
- Filling machines will be switched on or off by knee-operated lever switches or hand operated switches and/or remote control signals.
- Filling machines with feed intake hopper can be equipped with;
 - divider device,
 - cover or photoelectric guard at the mouth of the feed intake hopper,
 - pressure activated trip bar or light barrier at the hopper edge,
 - divided feed intake hopper,
 - plough or counter auger,
 - interlocked step or interlocked ladder,
 - two hand control at the mouth of the feed intake hopper,
 - loading device.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 12463:2004+A1:2011 https://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

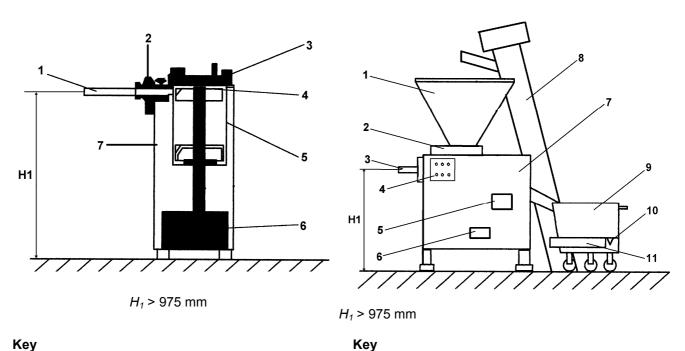


1 feed intake/hopper 1 filling horn 2 feeder 2 divider rotating valve/divider rotating valve 3 closing cover standards 3 filling horn 4 piston ON / OFF switch, 5 cylinder hood SIST EN 12463:2004+51 2011 interlocked 6 drive mechanism https://standards.iteh.ai/catalog/standards/sist/6adintermediate/step67-94a8-ON / OFF switch. 40a26fe54790/sist-en-12463-700rive mechanism hood 8 loading device transport car locking device 10 11 lifting device

Figure 1 — Assembly of a filling machine with piston

Figure 2 — Assembly of a filling machine with feed intake hopper and loading device

1.2.3 Auxiliary machines


- Auxiliary machines consist of devices for filling, portioning, twisting, displacing, forming, mincing and of a drive system.
- Auxiliary machines do not operate independently. These machines will be actuated directly or by filling machines (see Figures 3 to 9).
- Auxiliary machines will be switched on or off by knee operated lever switches or hand operated switches and/or remote control signals.
- Auxiliary machines can be fitted with;
 - dividing device,
 - hanging device.

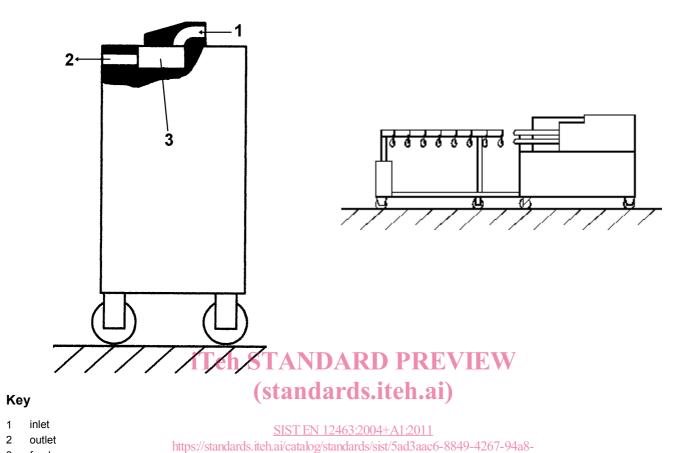

40a26fe54790/sist-en-12463-2004a1-2011

Figure 3 — Auxiliary twisting machine

Figure 4 — Auxiliary portioning and hanging line








Figure 5 — Auxiliary portioning and hanging line

Figure 6 — Auxiliary portioning and hanging line

3

feeder



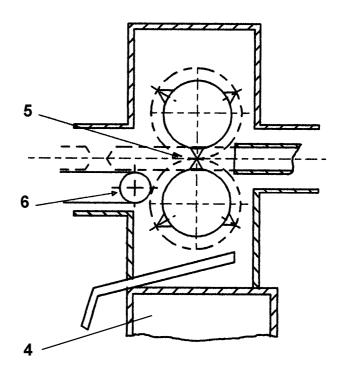

Key


- inlet
- 2 outlet
- forming device

iTeh STANDAR base D

(standards6.itenveyor.belt

Figure 7 — Forming devices SIST EN 12463:2004+A1:2011

https://standards.iteh.a/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-20114



Key

- drive shaft
- set of cutting tools 2
- feed intake canal 3
- nut/plate

Key

- drive shaft
- cutting tools 2
- feed intake canal 3
- locking/plate

Figure 8 — Ancillary mincing machine driven by the Figure 9 — Ancillary mincing machine with direct filling machines

drive

1.3 Intended use

During the production of this document the following assumptions were made:

Filling machines are installed in a sufficiently lighted place.

They are used only by designated and skilled operators.

Filling machines are not foreseen to be cleaned with pressurized water (e.g. tap water).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

♠ EN 574:1996+A1:2008, Safety of machinery — Two-hand control devices — Functional aspects — Principles for design

EN 614-1, Safety of machinery — Ergonomic design principles — Part 1: Terminology and general principles

EN 953:1997+A1:2009, Safety of machinery — Guards — General requirements for the design and construction of fixed and movable guards

EN 1005-1, Safety of machinery — Human physical performance — Part 1: Terms and definitions

EN 1005-2, Safety of machinery — Human physical performance — Part 2: Manual handling of machinery and component parts of machinery

EN 1005-3, Safety of machinery — Human physical performance — Part 3: Recommended force limits for machinery operation

SIST EN 12463:2004+A1:2011

EN 1088:1995+A2:2008, Safety of machinery — Interlocking devices associated with guards — Principles for design and selection

EN 1672-2:2005+A1:2009, Food processing machinery — Basic concepts — Part 2: Hygiene requirements

EN 13288:2005+A1:2009, Food processing machinery — Bowl lifting and tilting machines — Safety and hygiene requirements

EN 60204-1:2006, Safety of machinery — Electrical equipment of machines — Part 1: General requirements (IEC 60204-1:2005, modified)

EN 60529, Degrees of protection provided by enclosures (IP code) (IEC 60529:1989)

EN 61496-1, Safety of machinery — Electro-sensitive protective equipment — Part 1: General requirements and tests (IEC 61496-1:2004, modified)

EN ISO 3744:2010, Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering methods for an essentially free field over a reflecting plane (ISO 3744:2010)

EN ISO 4287, Geometrical product specifications (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters (ISO 4287:1997)

EN ISO 4871:2009, Acoustics — Declaration and verification of noise emission values of machinery and equipment (ISO 4871:1996)

EN ISO 11201:2010, Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions in an essentially free field over a reflecting plane with negligible environmental corrections (ISO 11201:2010)

EN ISO 11688-1, Acoustics — Recommended practice for the design of low-noise machinery and equipment — Part 1: Planning (ISO/TR 11688-1:1995)

EN ISO 12100:2010, Safety of machinery — General principles for design — Risk assessment and risk reduction (ISO 12100:2010)

EN ISO 13849-1:2008, Safety of machinery — Safety-related parts of control systems — Part 1: General principles for design (ISO 13849-1:2006)

EN ISO 13855, Safety of machinery — Positioning of safeguards with respect to the approach speeds of parts of the human body (ISO 13855:2010)

EN ISO 13857:2008, Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs (ISO 13857:2008) (A)

Terms and definitions 3

A) For the purposes of this document, the terms and definitions given in EN ISO 12100:2010 and the following apply. (A)

iTeh STANDARD PREVIEW 3.1

twisting device

device to separate one portion from the next by twisting iteh.ai)

3.2 SIST EN 12463:2004+A1:2011

divider rotating valyeps://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8rotatable closing component 40a26fe54790/sist-en-12463-2004a1-2011

3.3

divider device

divider rotating valve, a divider slide valve

3.4

divider slide valve

movable closing plate

3.5

hanger device

device to suspend or transport the product

3.6

movable unit to convey the product onto a hanger device

3.7

ejector/extractor

device for detaching the set of cutting tools and the worm

3.8

extraction claw

tool for detaching the set of cutting tools and the worm

3.9

design height

height of the feed intake hopper edge measured from the floor

loading device

lift-tilt device for lifting and tilting of transport cars or containers

3.11

casing brake

device for retaining and braking the product casing on the filling horn

3.12

casing holding device

device for holding and sealing product casings onto or in connection with the filling horn

3.13

casing clamp

device for centring and clamping the shirred product casing

3.14

feed intake hopper

container for receiving products to be processed with safety function

3.15

device for locking the transport car or container in the loading device standards.iteh.ai)

3.16

feeder

unit for product transport

SIST EN 12463:2004+A1:2011 https://standards.iteh.ai/catalog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

3.17

plough

fixed curve-shaped counter-component to the infeed auger

3.18

divided hopper

feed intake hopper with a disconnecting point in the upper hopper part

protecting device against tilting

device to prevent lifting or toppling over of the machine

3.20

design dimension

sum of dimensions measured from the floor (standing area), in the case of steps, intermediate steps or ladders from the standing area to the feed intake hopper edge and from the feed intake hopper edge to the first danger point in the feed intake hopper

3.21

piston

moving part for pressing out the product

3.22

light barrier

optical-electric safety component

3.23

blade

cutting tool with one or several blades

rotating head

hinged installation with one or more filling horns

3.25

trip bar

movable device with safety function

3.26

worm casing

casing for holding the worm and the set of cutting tools

3.27

set of cutting tools

rough-cutter, blade and hole plate for size reduction of product

3.28

protective hood

movable safety device on the discharge outlet

3.29

hinged arm

Teh STANDARD PREVIEW movable part of the lift-tilt device (standards.iteh.ai)

3.30

counter auger

fixed counter-component to the infeed auger 12463:2004+A1:2011

alog/standards/sist/5ad3aac6-8849-4267-94a8-40a26fe54790/sist-en-12463-2004a1-2011

3.31

transport car

mobile device for holding the processed or to the processed product

3.32

cutting device

device (e.g. knife, wire, scissor) for the cutting of portions filled into product casings

overtravelling guard

device for automatic movement stopping

3.34

removal

device for removing the product in the product casing

3.35

closing Cover

closing plate with safety function at the opening of the cylinder

3.36

lock nut

device for locking the set of cutting tools in the cutting chamber

3.37

infeed auger

rotating conveying element in the feed intake hopper